


MAKE FL MINI

Frameless downlight for spot lighting. CRI>90

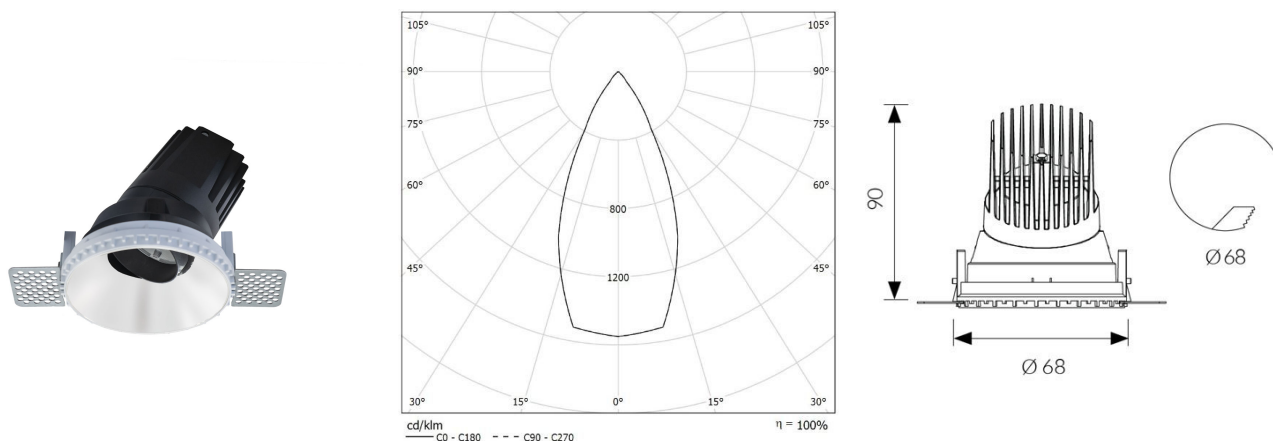

CODE		LICHTSTROM	ABMESSUNGEN	ZERTIFIKATIONEN
39FL3K436MND	3W 36° 4000K	353lm	Ø 78mm	CE IP 44 LED ENERGY EFFICIENCY CLASS F

Optik

Polycarbonate lens Ø 35mm.
UGR<19.
UGR<16 with dedicated accessory.

Gehäuse

Manufactured from pressure die-cast aluminum with epoxy powder coating.

Spezifikationen

Built-in driver;
CRI>90;
McAdams 3;
Life Time: L80/B10 >50.000h;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009

Referenznorm

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Farben

Weiß RAL 9003 - Code B
Schwarz RAL 9005 - Code C8
Weitere Farben - auf Anfrage

Verkabelung

D: Serienmäßige Verkabelung 230-240V/50-60Hz, dimmbare DALI.

