



# ABSENT ESSENTIAL




**ABSENT ESSENTIAL** represents a **high-quality, essential and efficient back-lighting solution** for offices or public spaces. Suitable for recessed, ceiling or suspended installation, **ABSENT ESSENTIAL** comes in different dimensions that make it **versatile in every context**.

**ID 41**








esse-ci

## FEATURES

-  Direct emission
-  UGR <19
-  IP 40






## LED

-  3000K/4000K
- >115 lm/W icon" data-bbox="758 238 788 258"/> >115 lm/W
-  CRI >94
-  Eye safety: R60
-  Mac Adams 3
-  L80/B10 >50.000h

## CERTIFICATIONS

-  EEA Conformity
-  Energy efficiency
-  5 years warranty

## ON REQUEST

-  DALI - code D
-  Bluetooth - code BT\*
-  Emergency 1 hr - code EM
-  Emergency 3 hrs - code EM3R\*
-  False ceiling version 625x625mm\*

## SPECIFICATIONS

DPL technology for controlled emission UGR <19.

## BODY


Aluminum with epoxy powder coating.

\* Where available

# ABSENT ESSENTIAL <sup>DPL</sup>

IP 40

Diffuser with Diamond Prism LED(DPL) technology for controlled emission UGR <19.



Cod. 4000K	W	lm	L mm
41DPL18K4E	18W	1750	295x295
41DPL36K4E	36W	4140	595x595
41DPL22K4EM3	22W	2150	595x295
41DPL36K4EM3	36W	4140	1195x295
41DPL60K4EM6	60W	7150	1195x595

Cod. 3000K	W	lm	L mm
41DPL18K3E	18W	1610	295x295
41DPL36K3E	36W	3809	595x595
41DPL22K3EM3	22W	1978	595x295
41DPL36K3EM3	36W	3809	1195x295
41DPL60K3EM6	60W	6578	1195x595

## ACCESSORIES




Plasterboard installation kit.

41AA17E



Adjustable suspension kit. Cable length 3000mm.

41AA1330E



Ceiling installation kit.


41AAE300300  
41AAE600600  
41AAE600300  
41AAE1200300  
41AAE1200600



3 - 5 poles ceiling power supply box. Cable length 2000mm.

00AA16  
00AA165P

## TECHNICAL NOTES

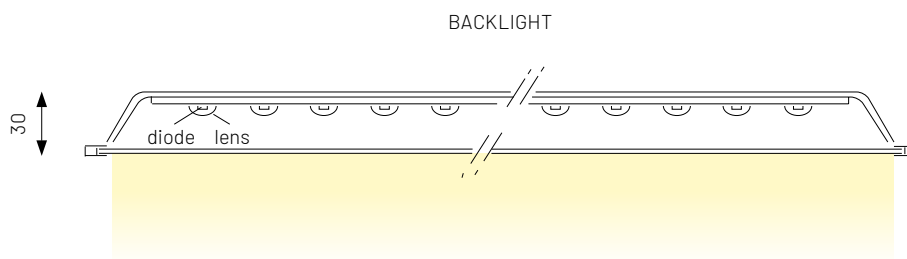

UNIFORM EMISSION UGR<19