

ABSENT

ID CODE: 41

ABSENT is a high performance, back illuminated LED modular luminaire, **designed to seamlessly integrate within the architecture of a building.** Designed primarily for commercial use, the product's superior technical performance far surpasses that of cheap, inferior alternatives. With its innovative optics, users can expect to install fewer ABSENT luminaires in a project, thereby realizing savings for installation cost and longterm energy consumption.

See also:




ABSENT HCL

p. 476









Design
esse-ci

FEATURES

-  Direct Emission
-  UGR <19; <22
-  IP 40






LED

-  3000K/4000K
-  >116 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

ON REQUEST

-  DALI - RDD code (verify the version)
-  BT Easy connect - BEM/BES code
-  Emergency kit 1/3 hour EM/EM 3h code
-  5000K
-  False ceiling structure 625x625mm

Specifications Efficiency:
>120 lm/W with High Power LED modules
>130 lm/W with Mid Power LED modules

Optic · DPL technology for a controlled UGR<19
· PG diffuser for diffused emission with UGR<22

Body Steel plate body with epoxy powder coating.



Colours ○ White RAL 9003 - Code: B



ABSENT DPL

OPTIC

Diffuser in Diamond Prism LED (DPL) Technology with UGR<19 for ambient with display screen equipment.

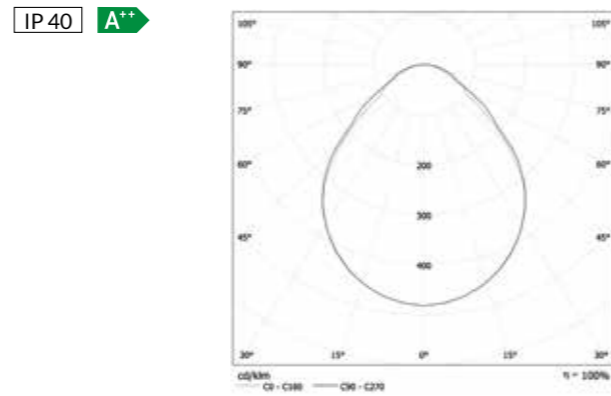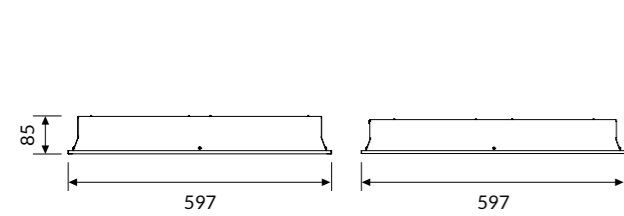

COLOUR TEMPERATURE **4000K**

COD	💡	lm
41DPL32L490C	32W	3848
41DPL48L490C	48W	5325




COLOUR TEMPERATURE **3000K**

COD	💡	lm
41DPL32L390C	32W	3724
41DPL48L390C	48W	5140

ABSENT PG

OPTIC

Methacrylate plate painted outside opacified + antistatic treatment for "soft" diffusing light emission with UGR<22.

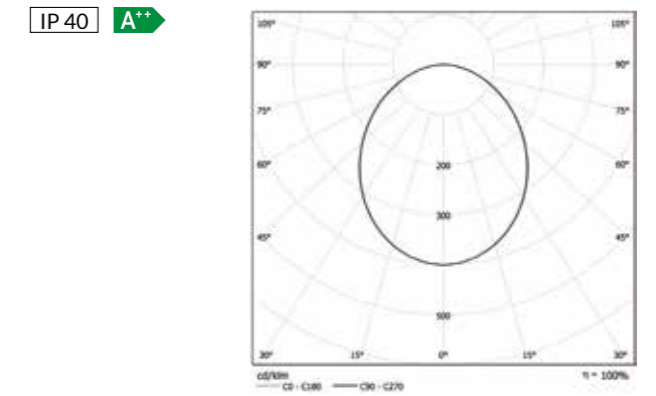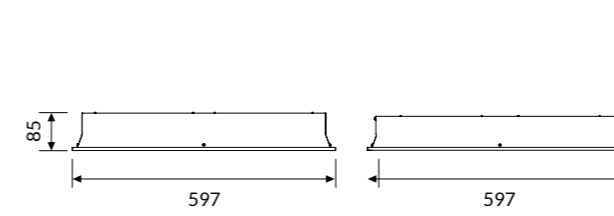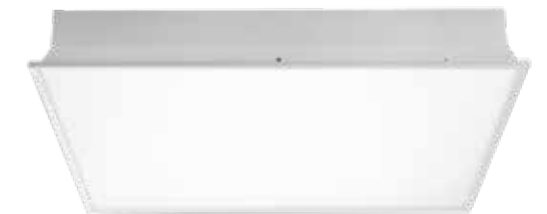

COLOUR TEMPERATURE **4000K**

COD	💡	lm
41PG32L490C	32W	4038
41PG48L490C	48W	5588

3000K

COD	💡	lm
41PG32L390C	32W	3908
41PG48L390C	48W	5394

Technical Note

INSTALLATION ON FALSE CEILING WITH VISIBLE STRUCTURE, HIDDEN STRUCTURE OR PLASTERBOARD

