

esse-ci

ID CODE: 10



low voltage

BEN LV

Design: ESSE-CI



The BEN family of appliances is enriched with a new component with **low voltage technology**.

The PG optics with satin diffuser and silk-screened perimeter and the **joint at the base** make it possible to direct BEN LV and illuminate any environment in a diffused, simple and effective.








ID CODE: 10






BEN LV

SPECIFICATIONS

FEATURES

-  Direct Emission
-  UGR < 22
-  IP 40



LED

-  3000K/4000K
- > 78 lm/W icon" data-bbox="653 513 670 530"/> > 78 lm/W
-  CRI > 90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 > 50.000h

CERTIFICATIONS

-  CE
-  5 years warranty

ON REQUEST

-  DALI - RDD code*
 -  Bluetooth - BT code*
- *verify the version

Specifications · Operation at 48V DC
· SMD LED Technology

Optic PG diffuser for homogeneous emission (UGR<22)

Body Aluminium body with epoxy powder coating.

Colour ○ White RAL 9003 wrinkled - Code: W
● Black RAL 9005 wrinkled - Code: BK

BEN LV


OPTIC

PG frosted Acryl-Satiné and impact resistant diffuser
UGR<22.




ID CODE: 10


TECHNICAL NOTE

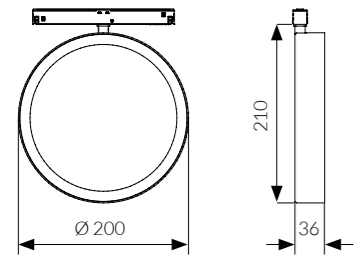

IP 40 A+

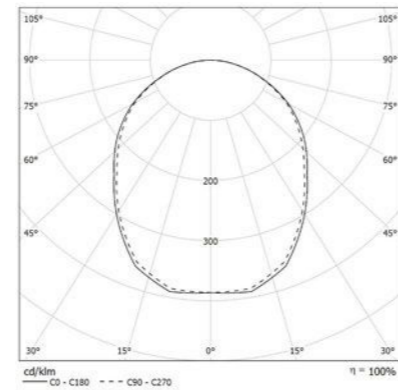

BODY ROTATION



COLOUR TEMPERATURE

4000K

3000K

COD	💡	lm
10PG12L49LV	12W	931

COD	💡	lm
10PG12L39LV	12W	879