

ACCESSORIES

S U S P E N D E D



80AA13

Single wire 1500mm long adjustable suspension kit.



80AA1330

Single wire 3000mm long adjustable suspension kit.



80AA16

3 poles-ceiling rose power cable. Cable length 2000mm.



80AA165P

5 poles-ceiling rose power cable. Cable length 2000mm.



80AA11

Electrified linear joint.



80AA05

Electrified 2 ways joint 90°.



80AA06

Electrified 3 ways joint.



80AA07

Electrified 4 ways joint.



80MC1000: 1000mm

80MC2000: 2000mm

Blind connection module in aluminium. Enquire for other lengths.

A C C E S S O R I E S

W A L L



80AA15


Kit for wall installation.



80AA151M

Kit for wall installation
Bright 6W / 12W.

R E C E S S E D

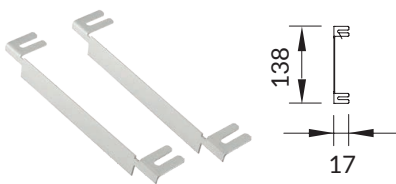

80AAPIL

Header kit for recessed installation.



- 80PL24:** for 24W (LP) / 48W (HP)
- 80PL30:** for 30W (LP) / 60W (HP)
- 80PL36:** for 36W (LP) / 72W (HP)
- 80PL42:** for 42W (LP)
- 80PL48:** for 48W (LP)
- 80PL54:** for 54W (LP)
- 80PL60:** for 60W (LP)
- 80PL66:** for 66W (LP)

Side aluminum profile recessing, also for continuous-row. Each item code is composed of 2 pieces of aluminum profile, joint plates and spacers for alignment. Stirrup brackets magnetically hold the Bright module into the profile for a trimless effect.

T E C H N I C A L N O T E

W	24LP/48HP	30LP/60HP	36LP/72HP	42LP	48LP	54LP	60LP	66LP
mm	1135	1415	1695	1975	2255	2535	2815	3095

