

CLOU

ID 59

CLOU enlarges with **unlimited creative solutions the outdoor light**. A **bollard, wall** or **ceiling** element, CLOU is designed to illuminate green areas and semi-open spaces with a modern and brilliant design. The structure is composed by an extruded petal profile with three grooves, where you can install silicone strip that, combined with spots, grant you to play in an amazing way with the light. Moreover, an overlapping junction can be applied to CLOU body to allow you to **create a dynamic weaving profile with different directions in the space** to obtain an even more refined and **personalized lighting composition**.

☑ Features

- IP 66
- IK 06
- -20°C/+40°C

💡 Led

- 3000K
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B10 >50.000h

⊙ Specifications

- Pc lens, beam angles: 15°-50°
- Silicone strip 7W/m

☐ Body

- Aluminum with epoxy powder coating

🎨 Colors

- White RAL 9003 wrinkled - code W
- Black RAL 9005 wrinkled - code BK
- Corten Bronze - code BC
- Green RAL 6036 - code VR



☆ Certifications

- CE Conformity
- Energy efficiency D
- 5 years warranty

📦 On request

- 2700K - code K27*
- 4000K - code K4*

* Where available

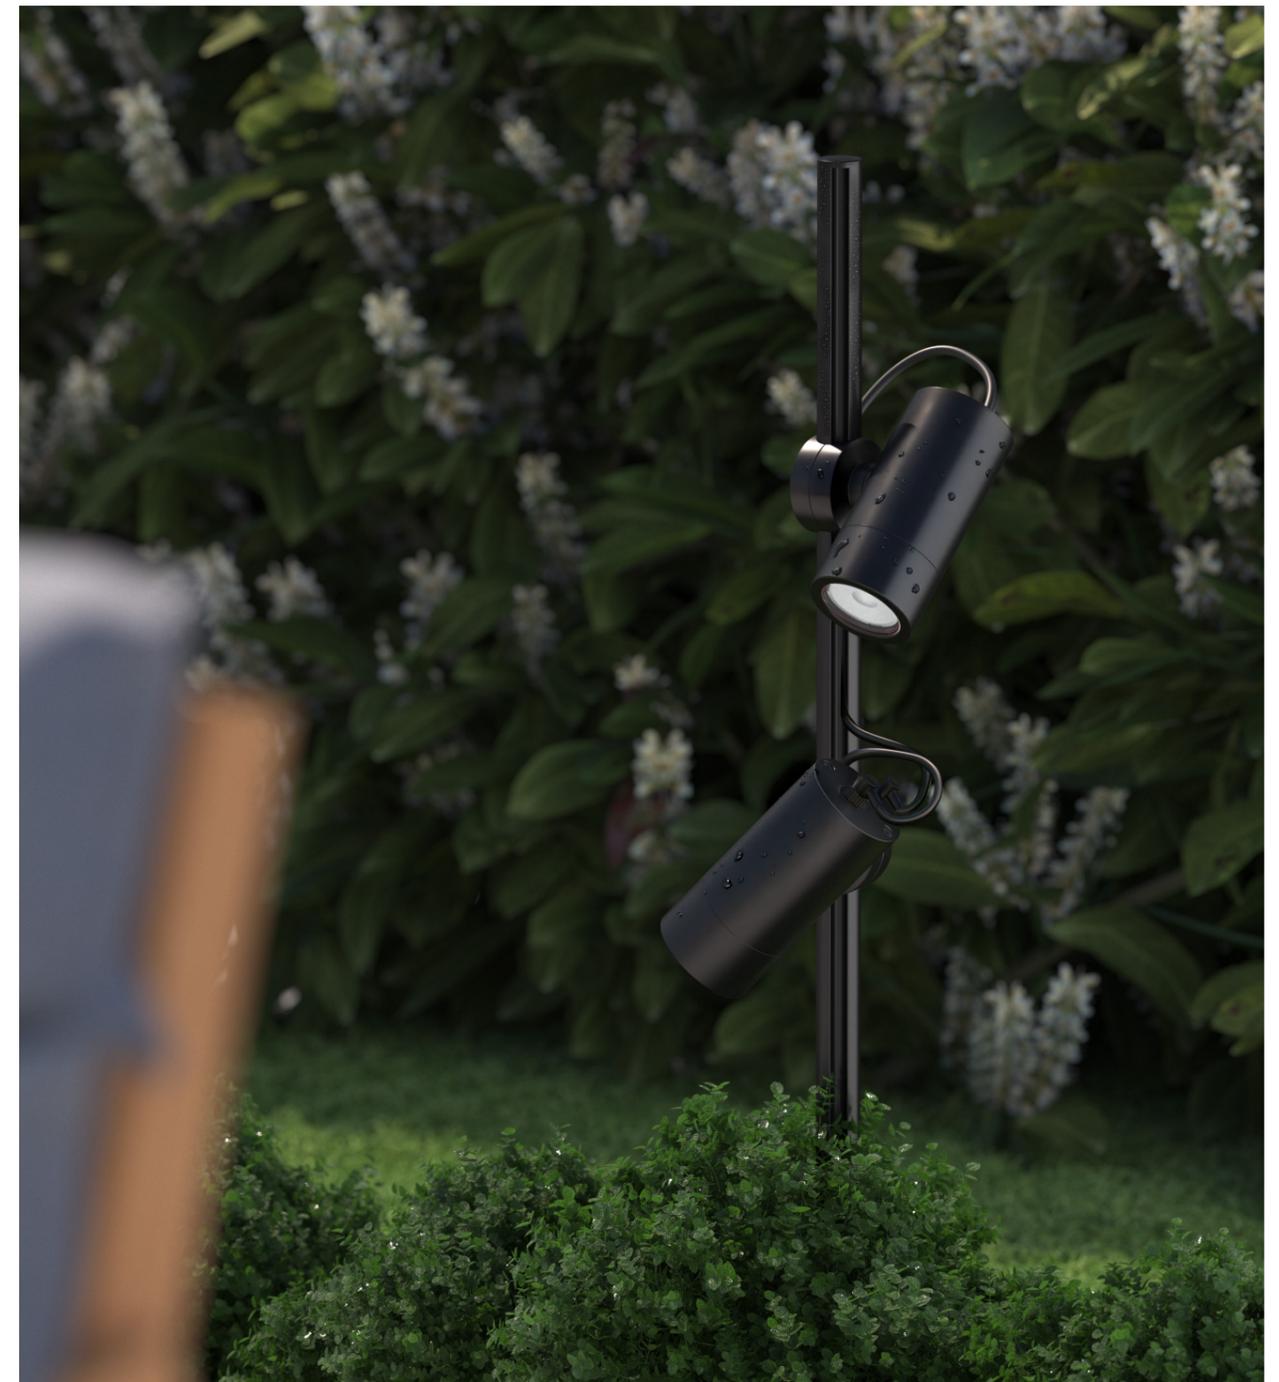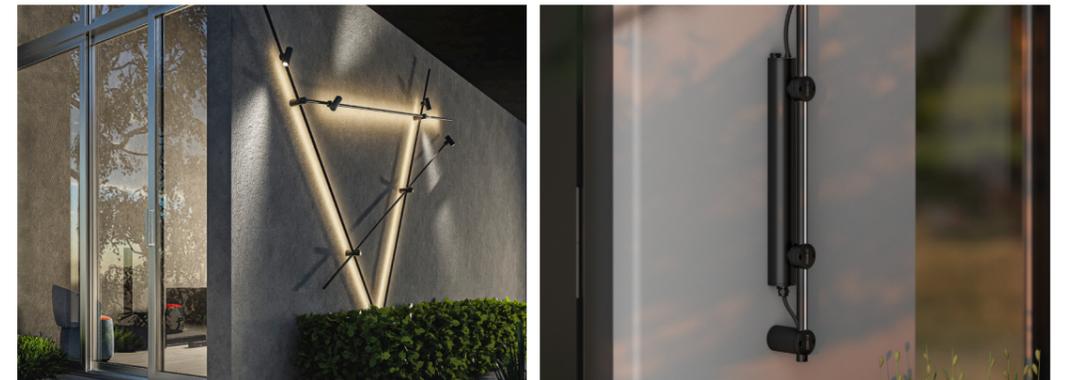


CLOU WALL LED STRIP

Extruded aluminium profile + 2 silicone LED strips 7W/m.

Cod. 3000K	Led	lm	Lmm
59AA14K3W	2x7W	560	950

Wall-mount bracket 59AA14 included.
DRIVER not included. See page 417.

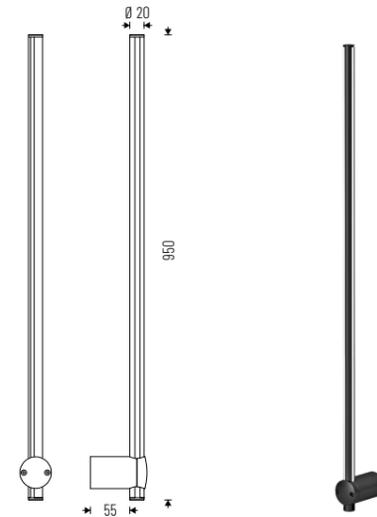


CLOU LED STRIP & SPOT

Extruded aluminium profile + 1 PC lens spot (15°/50° beam angle) + silicone LED strip 7W/m.

Cod. 3000K	Led	lm	Lmm
59D17S17K315B	1x7W 15° + 1x7W	700	950
59D17S17K350B	1x7W 50° + 1x7W	700	950

Bollard base 59AA21B included.
DRIVER not included. Alternative accessories and driver on page 417.

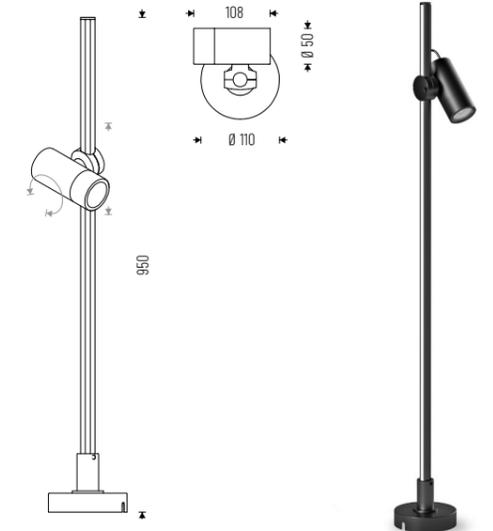


CLOU WALL LED STRIP & SPOT

Extruded aluminium profile + 1 PC lens spot + 1 silicone LED strip 7W/m.

Cod. 3000K	Led	lm	Lmm
59AA7S17K315W	1x7W 15° + 1x7W	700	950
59AA7S17K350W	1x7W 50° + 1x7W	700	950

Wall-mount bracket 59AA14 included.
DRIVER not included. See page 417.

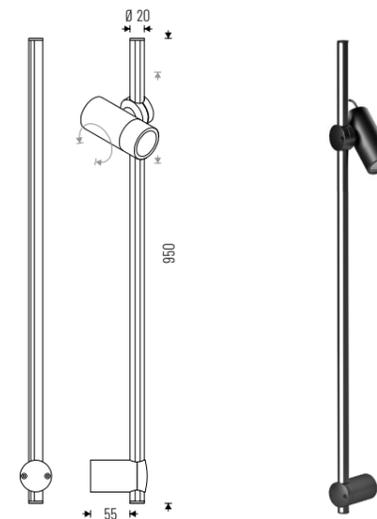


CLOU LED STRIP & DOUBLE SPOT

Extruded aluminium profile + 2 PC lens spots (15°/50° beam angle) + 2 silicone LED strips 7W/m.

Cod. 3000K	Led	lm	Lmm
59D114S27K315B	2x7W 15° + 2x7W	1400	950
59D114S27K350B	2x7W 50° + 2x7W	1400	950

Bollard base 59AA21B included.
DRIVER not included. Alternative accessories and driver on page 417.

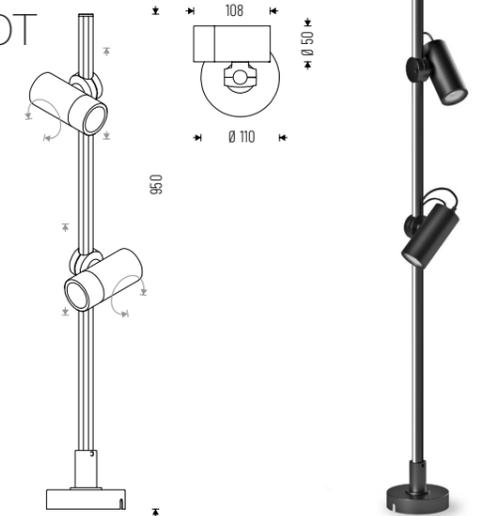


CLOU LED STRIP

Extruded aluminium profile + 3 silicone LED strips 7W/m.

Cod. 3000K	Led	lm	Lmm
59AA13K3B	13W	550	650
59AA19K3B	19W	840	950
59AA42K3B	42W	1720	2050

Bollard base 59AA21B included.
DRIVER not included. Alternative accessories and driver on page 417.

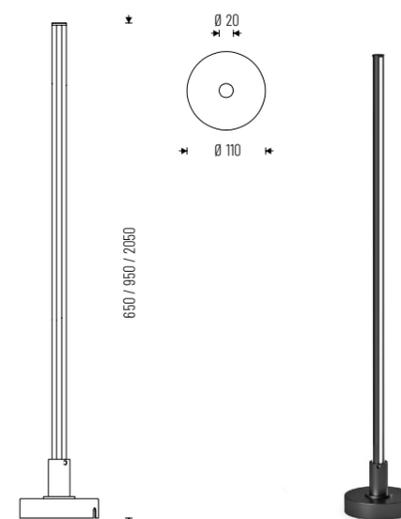


CLOU DOUBLE SPOT

Extruded aluminium profile + 2 PC lens spots (15°/50° beam angle).

Cod. 3000K	Led	lm	Lmm
59AA27K315B	2x7W 15°	840	650
59AA27K350B	2x7W 50°	840	650
59AA27K315LB	2x7W 15°	840	950
59AA27K350LB	2x7W 50°	840	950

Bollard base 59AA21B included.
DRIVER not included. Alternative accessories and driver on page 417.

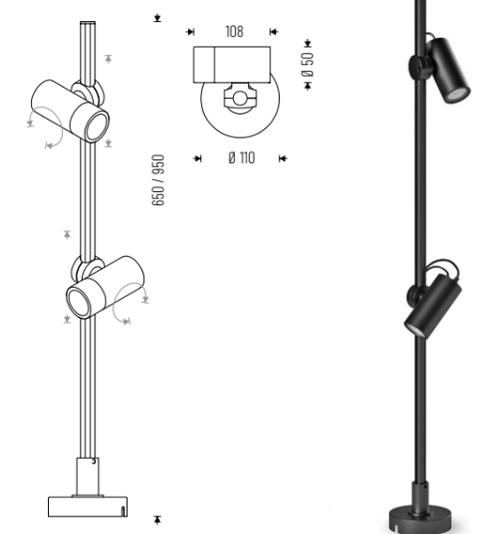



CLOU__ARM


Extruded aluminum profile with end caps.



Cod.	Lmm
59AA700	700
59AA1000	1000
59AA2000	2000
59AA3000	3000

CLOU__SPOT

PC lens beam angle 15°/50°.
Single cable entry. Driver built-in.





IP 66

Cod. 3000K	Led	lm	Ømm
59PC7K315	7W 15°	420	50
59PC7K350	7W 50°	420	50

CLOU SPOT MID

PC lens beam angle 15°-50°.

Double cable exit for in/out wiring. Driver built-in.

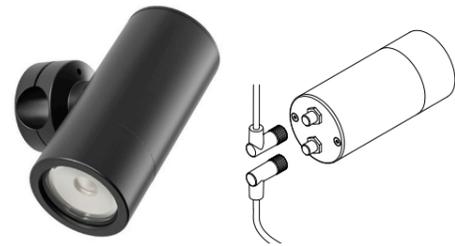

IP 66

Cod. 3000K	Led	lm	Ømm
59PC7K315M	7W 15°	420	50
59PC7K350M	7W 50°	420	50

ACCESSORIES



Wall mounting element with end cap.

59AA14



Wall mounting element extension.

59AA14L



Wall mounting element 1 way.

59AA05



Cable connection.

59AA11



Cable with double connector for spot, length 500/1000/1500mm.

59AACA500
59AACA1000
59AACA1500



Driver box 24V IP67
30-60-100W 24V.

59BX3067
59BX6067
59BX10067



Driver ON/OFF IP 67
30-60-100W 24V.

59LC3024IS67
59LC6024IS67
59LC10024IS67



Base for bollard installation. Peg base for in-ground installation.

59AA21B
59AA21

CLOU ROUND STRIP

Silicone LED strip 7W/m, diameter Ø 8 mm, with 1500 mm power cable.



IP 66

Cod. 3000K	Led	lm	Lmm
59SL7K360	7W/m	280lm/m	600
59SL7K390	7W/m	280lm/m	900
59SL7K3200	7W/m	280lm/m	2000
59SL7K3500	7W/m	280lm/m	5000



TECHNICAL NOTES

The CLOU BOLLARD system offers two installation methods, both designed to ensure stability and seamless integration with the surrounding context:

- ON CONCRETE OR PAVED SURFACES**
 Installation is carried out using a flat base for direct anchoring to solid surfaces such as pavements or concrete slabs.
- ON SOIL OR NATURAL GROUND**
 Installation is done using a ground spike base for direct insertion into the ground, ideal for green areas.



COD. 59AA21B

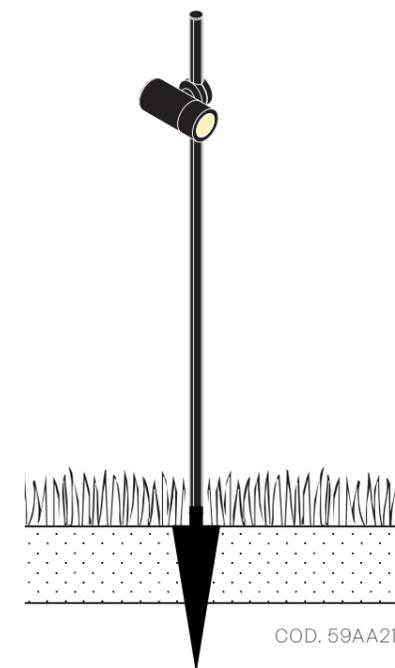

COD. 59AA21