


CRYSTAL

ID 95

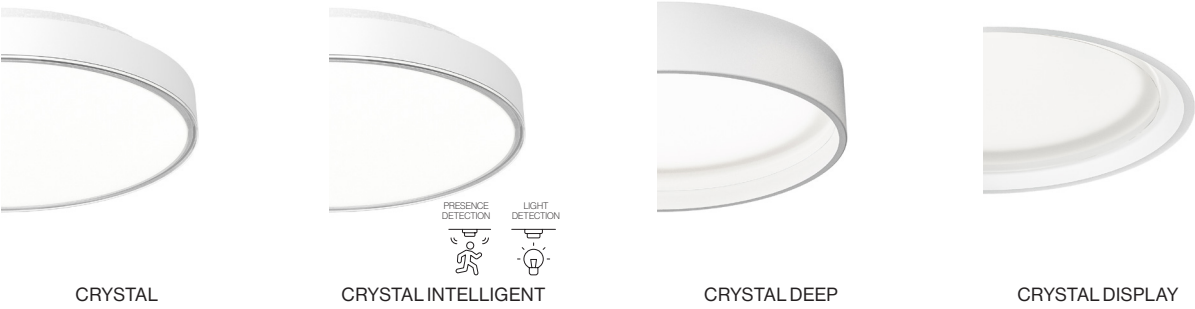

CE

E

RETILAP

5 YEARS WARRANTY

IP 54

CRI>90

Mac Adams 3

IK 06

RG0/RG1

L90/B10 50.000h

-20°


+45°

Body

Polymer structure; painted steel frame

CRYSTAL


Polycarbonate with internal PMMA screen for uniform emission. Beam angle: 110°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
95PT8K4S	739	95PT8K3S	733	8W	250
95PT12K4S	1224	95PT12K3S	1207	12W	250
95PT12K4M	1229	95PT12K3M	1218	12W	300
95PT24K4M	2629	95PT24K3M	2580	24W	300
95PT18K4L	1938	95PT18K3L	1926	18W	400
95PT30K4L	3313	95PT30K3L	3249	30W	400

CRYSTAL / DOUBLE EMISSION

Polycarbonate with internal PMMA screen for uniform emission. Indirect emission with PC frosted diffuser. Beam angle: 110°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
95DI10PTK4S	802	95DI10PTK3S	795	8+2W	250
95DI14PTK4S	1320	95DI14PTK3S	1303	12+2W	250
95DI14PTK4M	1321	95DI14PTK3M	1306	12+2W	300
95DI26PTK4M	2838	95DI26PTK3M	2774	24+2W	300
95DI20PTK4L	2143	95DI20PTK3L	2124	18+2W	400
95DI32PTK4L	3640	95DI32PTK3L	3582	30+2W	400

CE

E

RETILAP

5 YEARS WARRANTY

IP 54

CRI>90

Mac Adams 3

IK 06

RG0/RG1

L90/B10 50.000h

-20°

+45°

Body

Polymer structure; painted steel frame

Onreq.:

CODE K 27 2700K

CODE K 5 5000K

CODE K 65 6500K

Colours

COD. B

COD. C8



COD. CO

COD. CA

ONREQ.

CRYSTAL / INTELLIGENT


Polycarbonate with internal PMMA screen for uniform emission.
Integrated presence sensor. Beam angle: 110°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
95PT8K4SI	739	95PT8K3SI	733	8W	250
95PT12K4SI	1224	95PT12K3SI	1207	12W	250
95PT12K4MI	1229	95PT12K3MI	1218	12W	300
95PT24K4MI	2629	95PT24K3MI	2580	24W	300
95PT18K4LI	1938	95PT18K3LI	1926	18W	400
95PT30K4LI	3313	95PT30K3LI	3249	30W	400

CRYSTAL / DEEP

Sheet steel body with internal PMMA screen for uniform emission. Beam angle: 110°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
95AR8K4S	739	95AR8K3S	733	8W	272
95AR12K4S	1224	95AR12K3S	1207	12W	272
95AR12K4M	1229	95AR12K3M	1218	12W	322
95AR24K4M	2629	95AR24K3M	2580	24W	322
95AR18K4L	1938	95AR18K3L	1926	18W	422
95AR30K4L	3313	95AR30K3L	3249	30W	422

CE

E

RETILAP

IP 54

CRI>90

Mac Adams 3

IK 06

RG0/RG1

L90/B10
50.000h

5 YEARS WARRANTY

On req.:

CODE K27
2700K

CODE K5
5000K

CODE K65
6500K

1h EM

1h DEM

3h EM

EM

DEM

EM3H

Body

Polymer structure; painted steel frame

Colours

COD. B

COD. C8

COD. C0


COD. CA

ON REQ.

-20°
+45°

CRYSTAL / DISPLAY

Recessed version with polycarbonate body and internal PMMA screen for uniform light emission. Beam angle: 110°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
95PT8K4SR	739	95PT8K3SR	733	8W	328
95PT12K4SR	1224	95PT12K3SR	1207	12W	328
95PT12K4MR	1229	95PT12K3MR	1218	12W	378
95PT24K4MR	2629	95PT24K3MR	2580	24W	378
95PT18K4LR	1938	95PT18K3LR	1926	18W	478
95PT30K4LR	3313	95PT30K3LR	3249	30W	478



Mounting kit with 5-pole rigid stem. Stem length 2000 mm.

95AA14T

TECHNICAL NOTES

CRYSTAL offers the possibility to customise the external frame, with a choice of four different finishes.

