




# CUBE MINI




**CUBE MINI** belongs to a range of **small-sized luminaires for both recessed and ceiling applications**. The innovative joint system allows to break down any installation scheme, satisfying the architectural needs of any project. **The body cut-off eliminates the perception of glare** and improves visual comfort.

**ID 49**

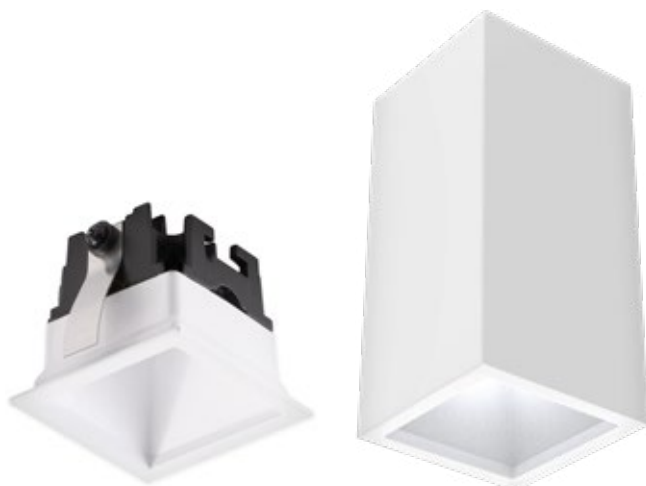







esse-ci

## FEATURES

-  Direct emission
-  UGR <19; <22
-  IP 40




## LED

-  3000K/4000K
-  >90 lm/W
-  CRI >90
-  Eye safety: R60/R61
-  Mac Adams 3
-  L80/B10 >50.000h

## CERTIFICATIONS

-  EEA Conformity
-  Energy efficiency
-  5 years warranty

## ON REQUEST

-  DALI - code D\*
-  Bluetooth - code BT\*
-  Emergency 1 hr - code EM\*  
Emergency 3 hrs - code EM3R\*

## SPECIFICATIONS

Built-in driver.  
Satin PC primary screen, UGR <19.  
PG version with additional coplanar screen in opaline PC, UGR <22.

## BODY

Die-cast aluminium.

## COLORS

White RAL 9003 matte - code B  
Black RAL 9005 matte - code C8


\*Verificare disponibilità

## CUBE MINI RECESSED

Accessories on page 154.

IP 40

Primary diffuser in frosted PC, UGR<19.



Cod. 4000K		lm	L mm
49DR5K4	5W	459	50
49DR8K4	8W	729	50

Cod. 3000K		lm	L mm
49DR5K3	5W	418	50
49DR8K3	8W	663	50


DOWNLIGHT

## CUBE MINI CEILING

Accessories on page 154.

IP 40

Primary diffuser in frosted PC, UGR<19.



Cod. 4000K		lm	L mm
49DR5K4C	5W	459	50
49DR8K4C	8W	729	50

Cod. 3000K		lm	L mm
49DR5K3C	5W	418	50
49DR8K3C	8W	663	50

# ACCESSORIES



Additional coplanar screen in opaline PC, UGR <22.

49AAPG




Bracket for multiple recessed installation.

49AA11

# TECHNICAL NOTES



## MULTIPLE INSTALLATION

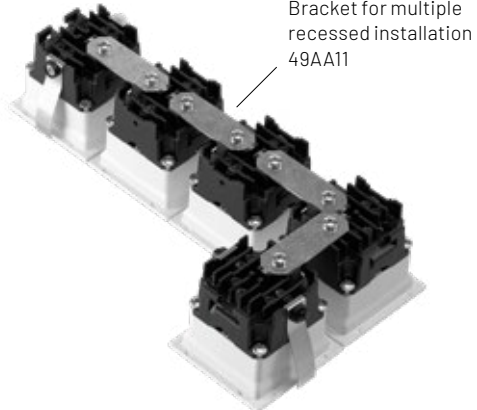

Bracket for multiple recessed installation 49AA11