


## DEW

ID 97

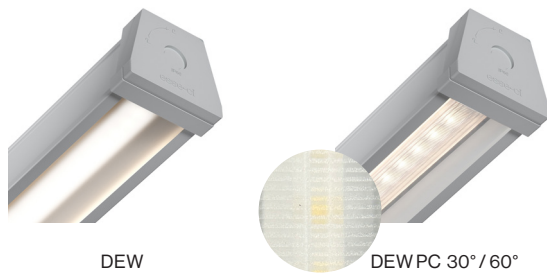

CE, D, RETILAP, IP 66, CRI > 90, MacAdam 3  
 5 YEARS WARRANTY, 50000h, L90/B10  
 -25° to +45°

## Body



Drawn steel  
with die-cast  
end caps

337

INDUSTRIALIP

## DEW

Clear tempered glass with internal opal PC diffuser.  
Wide beam emission. 5 x 1.5 mm<sup>2</sup> through-wiring.

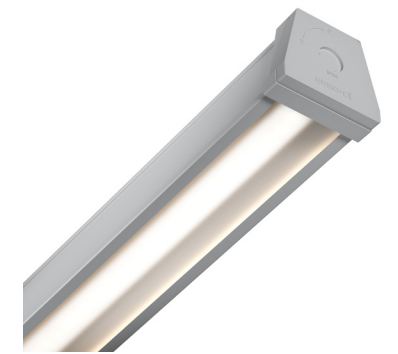


*Fixtures supplied with spacer kit for surface-mounted installation.*

| CCT. 4000K | lm    | CCT. 3000K | lm   | Led | Lmm  |
|------------|-------|------------|------|-----|------|
| 97VO12K4   | 1688  | 97VO12K3   | 1567 | 12W | 720  |
| 97VO15K4   | 2110  | 97VO15K3   | 1959 | 15W | 720  |
| 97VO20K4   | 2814  | 97VO20K3   | 2612 | 20W | 720  |
| 97VO24K4   | 3377  | 97VO24K3   | 3134 | 24W | 1200 |
| 97VO30K4   | 4221  | 97VO30K3   | 3917 | 30W | 1200 |
| 97VO40K4   | 5628  | 97VO40K3   | 5223 | 40W | 1200 |
| 97VO45K4   | 6332  | 97VO45K3   | 5876 | 45W | 1500 |
| 97VO56K4   | 7879  | 97VO56K3   | 7312 | 56W | 1500 |
| 97VO75K4   | 10553 | 97VO75K3   | 9794 | 75W | 1500 |

## DEW / PC 30°

Clear tempered glass with internal PMMA lens.  
30° beam emission. 5 x 1.5 mm<sup>2</sup> through-wiring.



Fixtures supplied with spacer kit for surface-mounted installation.


| CCT. 4000K | lm    | CCT. 3000K | lm    | Led     | Lmm  |
|------------|-------|------------|-------|---------|------|
| 97VT15K430 | 2349  | 97VT15K330 | 2185  | 15W 30° | 720  |
| 97VT20K430 | 3132  | 97VT20K330 | 2913  | 20W 30° | 720  |
| 97VT30K430 | 4698  | 97VT30K330 | 4370  | 30W 30° | 1200 |
| 97VT40K430 | 6264  | 97VT40K330 | 5826  | 40W 30° | 1200 |
| 97VT56K430 | 8770  | 97VT56K330 | 8157  | 56W 30° | 1500 |
| 97VT75K430 | 11745 | 97VT75K330 | 10925 | 75W 30° | 1500 |

CE D RETILAP IP66 CRI > 90 MacAdam 3  
 5 YEARS WARRANTY -25° +45°  
 Onreq. DALI CODE - D BT 1h EM 1h DEM 3h EM 3h EM3H  
 CODE K27 2700K CODE K5 5000K  
 Body: Drawn steel with die-cast end caps  
 Colours: RAL 7035

338

DEW / PC 60°

Clear tempered glass with internal PMMA lens.  
60° beam emission. 5 x 1.5 mm² through-wiring.



Fixtures supplied with spacer kit for surface-mounted installation.

| CCT. 4000K | lm    | CCT. 3000K | lm    | Led     | Lmm  |
|------------|-------|------------|-------|---------|------|
| 97VT15K460 | 2349  | 97VT15K360 | 2185  | 15W 60° | 720  |
| 97VT20K460 | 3132  | 97VT20K360 | 2913  | 20W 60° | 720  |
| 97VT30K460 | 4698  | 97VT30K360 | 4370  | 30W 60° | 1200 |
| 97VT40K460 | 6264  | 97VT40K360 | 5826  | 40W 60° | 1200 |
| 97VT56K460 | 8770  | 97VT56K360 | 8157  | 56W 60° | 1500 |
| 97VT75K460 | 11745 | 97VT75K360 | 10925 | 75W 60° | 1500 |

ACCESSORIES



Suspension kit, 1500 mm / 3000 mm length.

97AA13  
97AA1330



Bracket kit for wall-mounted installation.

97AA15

INDUSTRIAL IP

CE

RETAILP

5 YEARS WARRANTY

IP66

CRI>90

MacAdam 3

IK 09

RG0/RG1

L90/B10 50.000h

On req.:

BT

1h EM

1h DEM

3h EM

CODE K27 2700K

CODE K5 5000K

Body

Colours

Drawn steel with die-cast end caps

RAL 7035

-25°

+45°