


ERGO ESSENTIAL 2.0

ID 02



ERGO ESSENTIAL 2.0

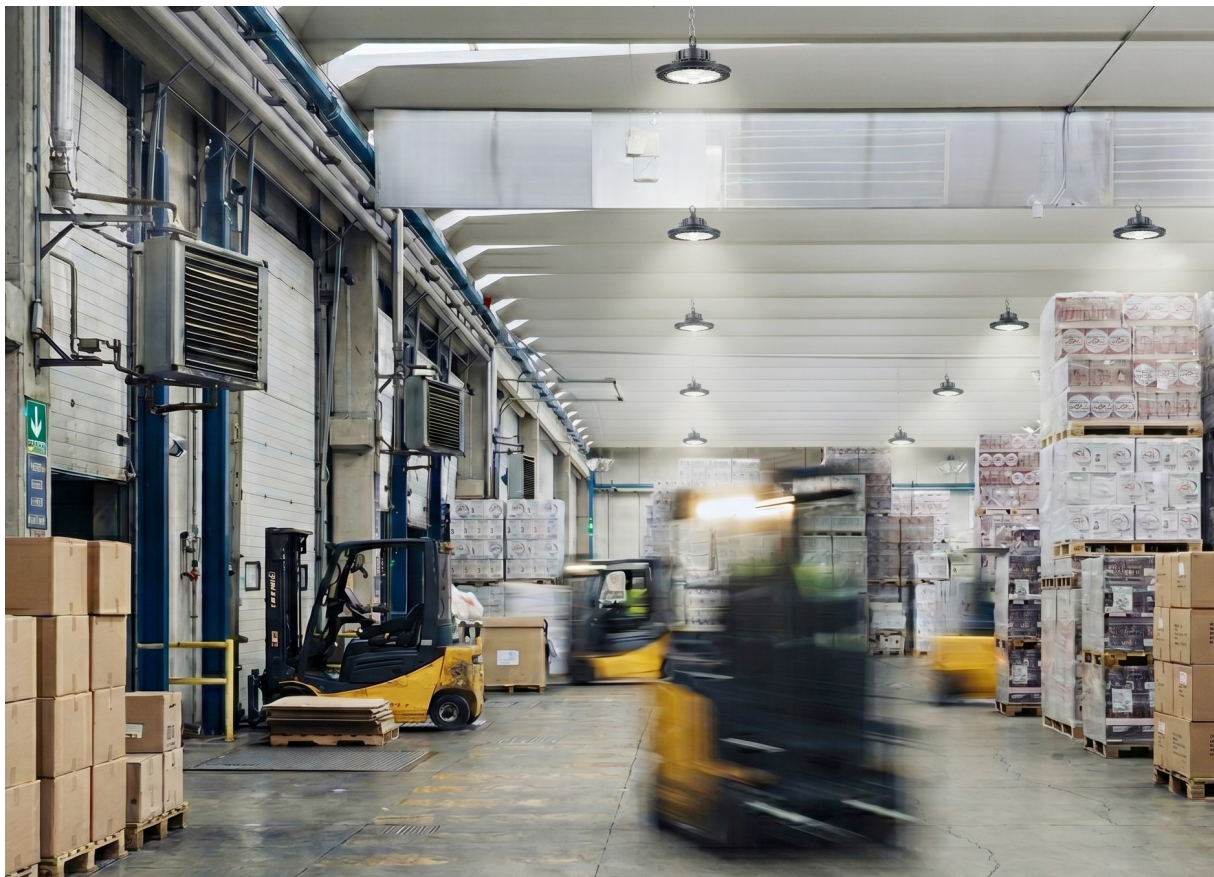

The structure of Ergo Essential 2.0 is designed to ensure high compatibility with the interchangeable DC-input smart control modules available on the market.

These devices can be completely concealed to preserve visual purity.



CE

RoHS

RETI LAP

IP 65

CRI>80

MacAdam 3

5 YEARS WARRANTY

IK 08

RG0/ RG1


L90/B10 50.000h

-30°
+45°

Body
Die-cast aluminium

ERGO ESSENTIAL 2.0 / SMALL

Polycarbonate lens with adjustable beam angles of 60°-90°-105°.




Supplied with IP-rated power connectors.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
02PC60K460SE	10800	02PC60K360SE	9730	60W 60°	234
02PC60K490SE	10800	02PC60K390SE	9730	60W 90°	234
02PC60K4105SE	10800	02PC60K3105SE	9730	60W 105°	234
02PC80K460SE	14000	02PC80K360SE	12600	80W 60°	234
02PC80K490SE	14000	02PC80K390SE	12600	80W 90°	234
02PC80K4105SE	14000	02PC80K3105SE	12600	80W 105°	234
02PC102K460SE	17000	02PC102K360SE	15300	102W 60°	234
02PC102K490SE	17000	02PC102K390SE	15300	102W 90°	234
02PC102K4105SE	17000	02PC102K3105SE	15300	102W 105°	234

ERGO ESSENTIAL 2.0 / MEDIUM

Polycarbonate lens with adjustable beam angles of 60°-90°-105°.



Supplied with IP-rated power connectors.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
02PC90K460ME	16200	02PC90K360ME	14980	90W 60°	270
02PC90K490ME	16200	02PC90K390ME	14980	90W 90°	270
02PC90K4105ME	16200	02PC90K3105ME	14980	90W 105°	270
02PC120K460ME	21000	02PC120K360ME	18900	120W 60°	270
02PC120K490ME	21000	02PC120K390ME	18900	120W 90°	270
02PC120K4105ME	21000	02PC120K3105ME	18900	120W 105°	270
02PC152K460ME	25500	02PC152K360ME	22950	152W 60°	270
02PC152K490ME	25500	02PC152K390ME	22950	152W 90°	270
02PC152K4105ME	25500	02PC152K3105ME	22950	152W 105°	270

CE

RoHS

RETI LAP

IP 65

CRI>80

MacAdam 3

5 YEARS WARRANTY

IK 08

RG0/ RG1

L90/B10 50.000h

-30°
+45°

On req.:

CODE - D

BT

1h EM

1h DEM

3h EM

3h DEM


CODE K5 5000K

Body
Die-cast aluminium

Colours
STD

ERGO ESSENTIAL 2.0 / LARGE

Polycarbonate lens with adjustable beam angles
of 60°-90°-105°.



Supplied with IP-rated power connectors.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
02PC100K460LE	19800	02PC100K360LE	17820	100W 60°	300
02PC100K490LE	19800	02PC100K390LE	17820	100W 90°	300
02PC100K4105LE	19800	02PC100K3105LE	17820	100W 105°	300
02PC150K460LE	26250	02PC150K360LE	23625	150W 60°	300
02PC150K490LE	26250	02PC150K390LE	23625	150W 90°	300
02PC150K4105LE	26250	02PC150K3105LE	23625	150W 105°	300
02PC202K460LE	34000	02PC202K360LE	30600	202W 60°	300
02PC202K490LE	34000	02PC202K390LE	30600	202W 90°	300
02PC202K4105LE	34000	02PC202K3105LE	30600	202W 105°	300

ACCESSORIES



Security chain
length 1500mm.

02AA13ECS



Bracket for wall/ceiling
installation, inclination ±45°.

02AA15SME - SMALL/MEDIUM
02AA15LE - LARGE



Protection against
overvoltage up to 10kV.

02AA00ESP



PIR sensor with
connector.

02AASENS



Programming remote control
with settings memory, for
managing multiple sensors.

02AARCSSENS

CE	RETILAP	IP 65	CRI>80	MacAdam 3	On req.: CODE - D	BT	1h EM	1h DEM	3h EM	Body	Colours
5 YEARS WARRANTY	IK 08	RG0/RG1	L90/B10 50.000h	CODE K5 5000K	Die-cast aluminium	STD					