



# EUROSTANDARD TRACK

**EUROSTANDARD TRACK** can be selected for either non-dimmable spotlights or applications needing **Bluetooth control**. The **EUROSTANDARD PLUS TRACK DALI** has an extra 2 conductors for use in **DALI applications** and is also offered in a **H-section version**, which can be used to add uplighting. All versions come in different lengths with mounting options which include direct, recessed, recessed trimless and suspended installation. The comprehensive range of compatible products and accessories complete this versatile product.

**ID 15**



esse-ci

## SPECIFICATIONS

- The conductors are integrated in the track by means of rigid extruded profile made from insulating material guaranteeing high dielectric strength.
- The 3 separate circuits consisting of 3 phase conductors and a common neutral allow for 3 lighting configurations to be switched individually.
- The 3-phase supply allows for an overall loading of 16A (10500 VA) which can be divided among the 3 circuits (3x3500 VA)
- The earth, positioned on the side, leads to an asymmetrical structure of the track. As a consequence couplers must be selected carefully.

## BODY

Aluminium

## COLORS

White RAL 9003 - code B  
Black RAL 9011 - code C8

## COMPATIBLE PRODUCTS



QI (P. 200)



SEMPlice LED (P. 44)



TERES (P. 88)



REM TRACK (P. 288)


# EUROSTANDARD TRACK

Accessories on page 181.

IP 20

ON-OFF version

The cross section view shows the position of each line.



Cod.	Notes	L mm
15AA1	electrified track	1000
15AA2	electrified track	2000
15AA3	electrified track	3000


# EUROSTANDARD PLUS TRACK DALI

Accessories on page 181.

IP 20

Dimmable version.

The cross section view shows the position of each line.




Cod.	Notes	L mm
15AA1DA	electrified track	1000
15AA2DA	electrified track	2000
15AA3DA	electrified track	3000

# EUROSTANDARD PLUS TRACK DALI RECESSED

IP 20

Dimmable version for recessed installation.

The cross section view shows the position of each line.




Cod.	Notes	L mm
15AA1DI	electrified track	1000
15AA2DI	electrified track	2000
15AA3DI	electrified track	3000

# EUROSTANDARD PLUS TRACK DALI H

IP 20

Dimmable version. Possibility of using the upper part as cable passage, or as housing for indirect luminaires or emergency groups.

The cross section view shows the position of each line.



Cod.	Notes	L mm
15AA1DH	electrified track	1000
15AA2DH	electrified track	2000
15AA3DH	electrified track	3000

# ACCESSORIES



## ACCESSORIES FOR ON/OFF VERSION



Steel cable suspension kit.  
Cable length 3000mm.

**15AA1330**



End-cap.

**15AA09**



Line end 250V-50Hz  
max16A.

**15AA09ELDX**  
**15AA09ELSX**



"L" coupler ON-OFF  
250V-50Hz max 16A.

**15AA05DX**  
**15AA05SX**



"T" coupler ON-OFF  
250V-50Hz max 16A.

**15AA06DX**  
**15AA06SX**



X coupler ON-OFF  
250V-50Hz max 16A.

**15AA07**



Flexible coupler ON-OFF  
250V-50Hz max 16A.

**15AA12**



Concealed straight  
coupler ON-OFF  
250V-50Hz max 16A.

**15AA11**

## ACCESSORIES FOR DALI VERSION



5/ 7 pole ceiling  
power cable.  
Cable length 2000mm.

**00AA165P**  
**00AA167P**



Steel cable suspension kit.  
Cable length 1500mm.

**15AA13D**  
**15AA13DH** - H version



Steel cable suspension kit.  
Cable length 3000mm.

**15AA1330D**  
**15AA1330DH** - H version



Ceiling mount.

**15AA14D**



Bracket for recessed  
installation.

**15AA17D**



Additional IP40 cover strip.  
Length 1000mm.

**15AAGP1D**



End-cap.

**15AA09D**



End-cap,  
recessed version.

**15AA09DI**

# ACCESSORIES



## ACCESSORIES FOR DALI VERSION



End-cap, for H version.

**15AA09DH**



Live end 250V-50Hz  
max16A.

**15AA09ELDXD**  
**15AA09ELSXD**



Live end 250V-50Hz  
max16A  
for recessed version.

**15AA09ELDXDI**  
**15AA09ELSXDI**



Live end 250V-50Hz  
max16A  
for H version.

**15AA09ELDXDH**  
**15AA09ELSXDH**



"L" coupler  
250V-50Hz max 16A  
for DALI version.

**15AA05DXD**  
**15AA05SXD**



"L" coupler  
for recessed version.

**15AA05DXDI**  
**15AA05SXDI**



"L" coupler  
250V-50Hz max 16A  
for H version.

**15AA05DXDH**  
**15AA05SXDH**



"T" coupler (internal 08 /  
external 06) 250V-50Hz  
max 16A - for DALI version.

**15AA06DXD**  
**15AA06SXD**  
**15AA08DXD**  
**15AA08SXD**



"T" coupler  
(internal 08 / external 06)  
for recessed version.

**15AA06DXDI**  
**15AA06SXDI**  
**15AA08DXDI**  
**15AA08SXDI**



"T" coupler (internal 08 /  
external 06) 250V-50Hz  
max 16A - for H version.

**15AA06DXDH**  
**15AA06SXDH**  
**15AA08DXDH**  
**15AA08SXDH**



"X" coupler  
250V-50Hz max 16A  
for DALI version.

**15AA07D**



"X" coupler  
for recessed version.

**15AA07DI**



"X" coupler  
250V-50Hz max 16A  
for H version.

**15AA07DH**



Concealed straight coupler  
250V-50Hz max 16A.

**15AA11D**



Flexible coupler  
250V-50Hz max 16A.

**15AA12D**




Cutting tool for track  
conductors.

**15AATC**





## LOAD CAPACITY AND ELECTRICAL DIAGRAMS

### LOAD CAPACITY

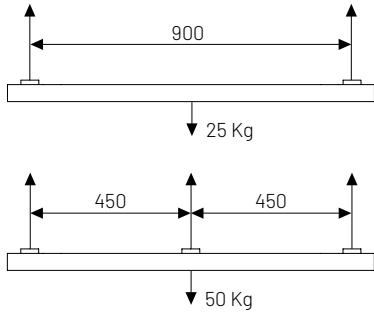

### ELECTRICAL DIAGRAMS

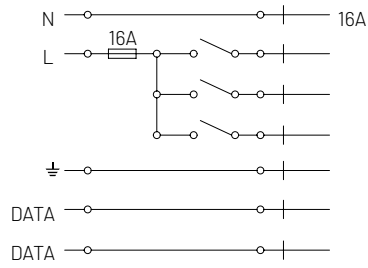

## EXAMPLE OF INSTALLATION DIAGRAM WITH ITEM CODES

