


FLEX STRIP LED HE

ID 00



Complete the FLEX STRIP LED HE strips with the linear systems:

ENDO, ENDO DISPLAY, PROFREEL and OPERA, for safe architectural integration and easy installation.

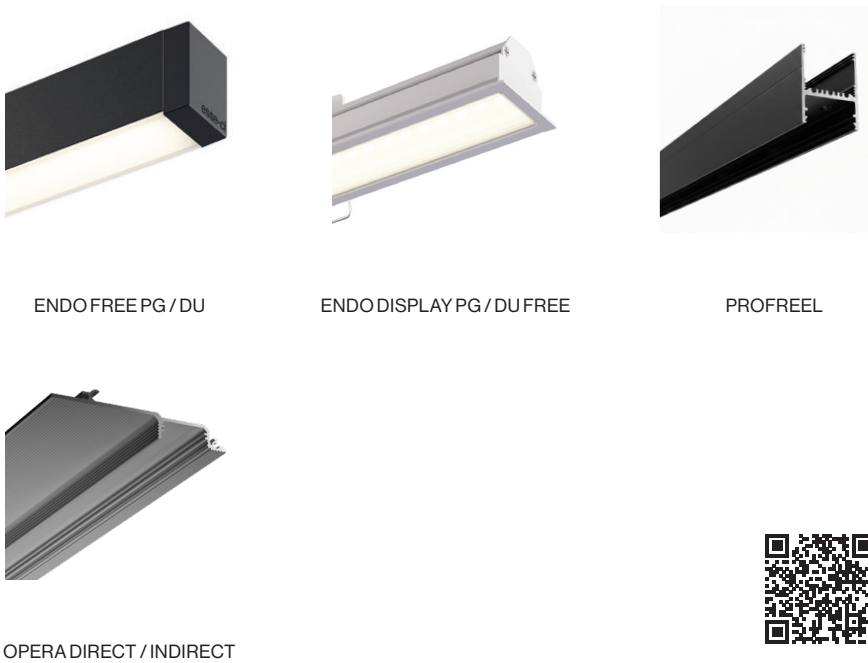

CE

RETI LAP

5 YEARS WARRANTY

IP 20/67

CRI>90

Mac Adams 3

L90/B10 50.000h

RG0/RG1

24 V

Body

LED strip with adhesive backing

STRIP LED / IP 20

Adhesive-backed 8 mm High Efficiency LED strip, 160 lm/W, 24V, CRI>90, 5000 mm length, cuttable every 33 mm.



CCT. 4000K	lm/m	CCT. 3000K	lm/m	Led	mm
00SL10K4HE	1600	00SL10K3HE	1520	10W/m	5000
00SL15K4HE	2400	00SL15K3HE	2280	15W/m	5000
00SL20K4HE	3200	00SL20K3HE	3040	20W/m	5000
00SL24K4HE	3840	00SL24K3HE	3648	24W/m	5000

CCT. 2700K	lm/m	Led	mm
00SL10K27HE	1488	10W/m	5000
00SL15K27HE	2232	15W/m	5000
00SL20K27HE	2976	20W/m	5000
00SL24K27HE	3571	24W/m	5000

STRIP LED / IP 67

Adhesive-backed 8 mm High Efficiency LED strip, 160 lm/W, 24V, CRI>90, with high IP67 protection rating, 5000 mm length, cuttable every 33 mm.

CCT. 5000K	lm/m	CCT. 4000K	lm/m	Led	mm
00SL10K5HEIP	1614	00SL10K4HEIP	1552	10W/m	5000
00SL15K5HEIP	2421	00SL15K4HEIP	2328	15W/m	5000

CCT. 3000K	lm/m	CCT. 2700K	lm/m	Led	mm
00SL10K3HEIP	1474	00SL10K27HEIP	1443	10W/m	5000
00SL15K3HEIP	2212	00SL15K27HEIP	2165	15W/m	5000

CE

RETI LAP

5 YEARS WARRANTY

IP 20/67

CRI>90

Mac Adams 3

L90/B10 50.000h

RG0/RG1

24 V

Body

LED strip with adhesive backing

STRIP LED / TUNABLE WHITE

CCT. 2700/6500K	lm/m
00SL24TW	2240

Led	mm
24W/m	5000

STRIP LED / DIM TO WARM

CCT. 1800/3000K	lm/m
00SL24DTW	2160

Led	mm
24W/m	5000

STRIP LED / RGBW

Cod.	lm/m
00SL17RGW	1170

Led	mm
17W/m	5000

STRIP LED / RGBW IP65

Cod.	lm/m
00SL17RGWIP65	1050

Led	mm
17W/m	5000

CE

RETI LAP

5 YEARS WARRANTY

III

IP 20/67

CRI>90

Mac Adams 3

CODE K27
2700K

CODE K3
3000K

CODE K4
4000K

CODE K5
5000K

CODE TW
Tunable white

CODE DTW
Dim to warm


CODE RGW
RGBW

LED strip with adhesive backing

24 V

DRIVER

Driver to be selected according to the power and length of the installed LED strip.

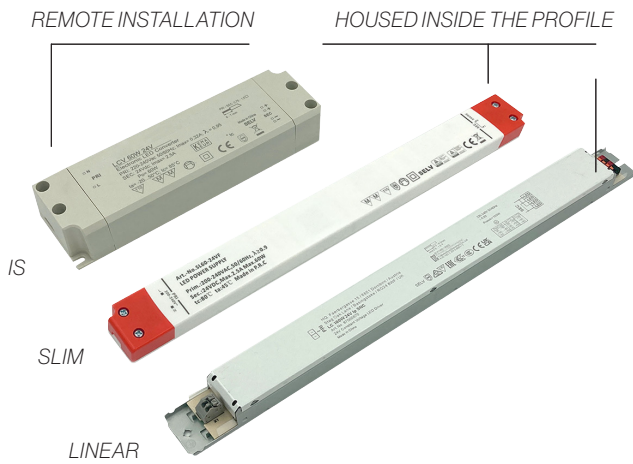

INDEPENDENT INSTALLATION CONVERTER (IS) - ON/OFF

Cod.	Led
00LC6024IS	24V 60W
00LC12024IS	24V 120W
00LC20024IS	24V 200W

Compatible products: PROFREEL - ENDO - ENDO DISPLAY - OPERA

INDEPENDENT INSTALLATION CONVERTER (IS) - DALI

Cod.	Led
00LC6024ISD	24V 60W
00LC10024ISD	24V 100W
00LC15024ISD	24V 150W

Compatible products: PROFREEL - ENDO - OPERA

INDEPENDENT INSTALLATION CONVERTER (IS) - BLUETOOTH

Cod.	Led
00LC6024ISBT	24V 60W
00LC10024ISBT	24V 100W
00LC15024ISBT	24V 150W

Compatible products: PROFREEL - ENDO - OPERA

CE

RETI LAP

5 YEARS WARRANTY

III

IP 20

CRI>90

Mac Adams 3

CODE K27
2700K

CODE K3
3000K

CODE K4
4000K

CODE K5
5000K

CODE TW
Tunable white

CODE DTW
Dim to warm

CODE RGW
RGBW

LED strip with adhesive backing

24 V

INDEPENDENT INSTALLATION CONVERTER SLIM - ON/OFF

Cod.	Led
00LC6024SIS	24V 60W
00LC10024SIS	24V 100W
00LC15024SIS	24V 150W
00LC25024SIS	24V 250W

Compatible products: PROFREEL - ENDO - ENDO DISPLAY - OPERA

INDEPENDENT INSTALLATION CONVERTER SLIM - DALI

Cod.	Led
00LC7024SISD	24V 70W
00LC12024SISD	24V 120W
00LC15024SISD	24V 150W
00LC25024SISD	24V 250W

Compatible products: PROFREEL - ENDO - ENDO DISPLAY - OPERA

LINEAR CONVERTER 30X21MM - ON/OFF

Cod.	Led
00LC6024	24V 60W
00LC10024	24V 100W

Compatible products: PROFREEL

LINEAR CONVERTER 30X21MM - DALI

Cod.	Led
00LC6024D	24V 60W
00LC10024D	24V 100W

Compatible products: PROFREEL

CE

RETI LAP

5 YEARS WARRANTY

III

IP 20

CRI>90

Mac Adams 3

CODE K27
2700K

CODE K3
3000K

CODE K4
4000K

CODE K5
5000K

CODE TW
Tunable white

CODE DTW
Dim to warm

CODE RGW
RGBW

-20°
+35°

RGW/RG1

L90/B10
50.000h

24 V

CONTROLLER / BASIC

Cod.	Note
DIMKITTW	Tunable White + Remote control

Cod.	Note
DIMKITRGBW	RGBW + Remote control



CONTROLLER / DALI RGBW/TW

Cod.	Note
00CL4X1D	DALI RGBW/Tunable White



ACCESSORIES



Start of line connector for IP 20.

00AA09ELRGB
RGBW
00AA09ELTW
TUNABLE WHITE



Start of line connector for IP 67.

00AA09ELIP
IP 67
00AA09ELIPRGB
RGBW IP 67



Strip to strip linear joint for IP 20.

00AA11RGB
RGBW
00AA11TW
TUNABLE WHITE



Strip to strip linear joint for IP 67.

00AA11IP
IP 67
00AA11IPRGB
RGBW IP 67



8-in-1 connector with push-in terminals for IP20 LED strips. Allows end-feed connections, linear joints and 2-, 3- or 4-way junctions.

00AA08EL

CE

RETI LAP

5 YEARS WARRANTY

III

IP 20

CRI>90

Mac Adams 3

CODE K27
2700K

CODE K3
3000K

CODE K4
4000K

CODE K5
5000K

CODE TW
Tunable white

CODE DTW
Dim to warm

CODE RGW
RGBW

-20°
+35°

RGW/RG1

L90/B10
50.000h

24 V