

ACCESSORIES



PG satin diffuser,
for direct/indirect light.

15PG1000 - L 1000mm
15PG2000 - L 2000mm
15PG3000 - L 3000mm



Blind module, available
in White and Black.

15MC1000 - L 1000mm
15MC2000 - L 2000mm
15MC3000 - L 3000mm



Quick connector for
strip-cable connection.

15AA09CR



Quick connector for
strip-strip connection.

15AA11SS



Slim driver 48V -
100W/150W/250W for
remote installation.

15LV10048IS
15LV15048IS
15LV25048IS



Control unit
DALI/0-10V/1-10V.
Push for 48V.

DIM48VD



Driver cover.

15GF16100
15GF16150
15GF16250




Driver+DALI control cover.

15GF16100D
15GF16150D
15GF16250D


TECHNICAL NOTES

CONFIGURATION EXAMPLE


Maximum length of the metal band: 15m. Two-point wall anchoring. 40° of maximum inclination towards the wall mount.

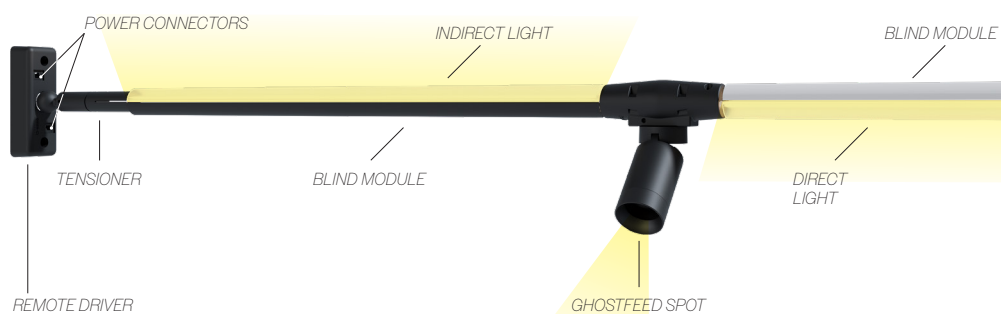

Schema di collegamento DALI
Wiring diagram DALI





Schema di collegamento Push
Wiring diagram Push



Schema/wiring Push 230Vac

Dimmable Power Supply for LEDs

FOR CONSTANT CONCENTRATION 12-43V

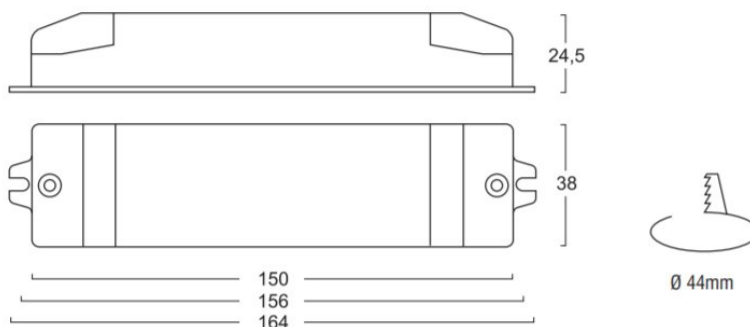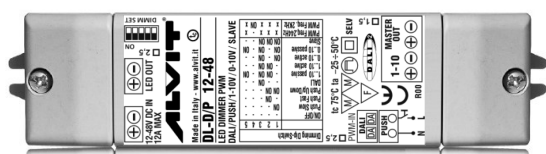

CODE	FLUX	SIZE	CERTIFICATION
DIM48VD		164 x 38 x 24,5mm	CE IP 20

Regulated power supply for LEDs in a range 12-43V dc
Constant current operation- Standalone container.


Technical Specifications

- ON/OFF
- Push-in timing for corridor function signal
- DALI
- Dimming 0-10V
- Dimming 1-10V
- Duration 50000 hrs at Tc max
- Flow-box
- Function MASTER/SLAVE
- Output button N.O. 200/Push N.O. 250
- Max cable length OUTPUT/Push 2.5 mt
- Maximum output power 24
- Frequency of Immersion >24 Hz
- Range ambient temperature -25/+50 °C
- Temperature max at point Tc 70°C
- Section area for wire 0.5-6 mm


Regulatory Reference

Compliant with standard UNI EN 61347-2-13, UNI EN 61347-1, UNI EN 62384, UNI EN 55015, UNI EN61547.

Schema di collegamento DALI
Wiring diagram DALI



Schema di collegamento Push
Wiring diagram Push

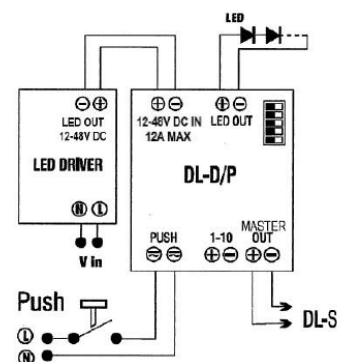

Schema/wiring Push 230Vac