

esse-ci

GROOVE HCL




Versione tunable white 2700K-6500K con flusso costante per tecnologie HCL ESSE-CI.

Driver DALI DT8.

OTTICA

Emissione diretta con diffusore con tecnologia DPL UGR<19 per ambienti con video terminale.

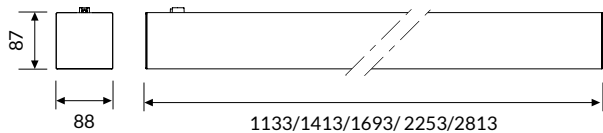


IP 40

A⁺⁺

VERSIONI

DPL

COD		lm	mm
43DR48DPLHCL	48W	3840	1133
43DR60DPLHCL	60W	4800	1413
43DR72DPLHCL	72W	5760	1693
43DR96DPLHCL	96W	7680	2253
43DR120DPLHCL	120W	9600	2813