

# HALL LED ESSENTIAL CEILING

ID 28

## HALL LED ESSENTIAL CEILING


Diffusore in policarbonato opalino.  
Fascio: 90°. Cut-off >10°.



| CCT. 4000K | lm   | CCT. 3000K | lm   | Led | Ømm | € ON/OFF | € DALI | € EM |
|------------|------|------------|------|-----|-----|----------|--------|------|
| 28PG15K4   | 2083 | 28PG15K3   | 2053 | 15W | 204 | 103      | 144    | 246  |
| 28PG21K4   | 3441 | 28PG21K3   | 3393 | 21W | 204 | 103      | 144    | 246  |



HALL LED ESSENTIAL CEILING

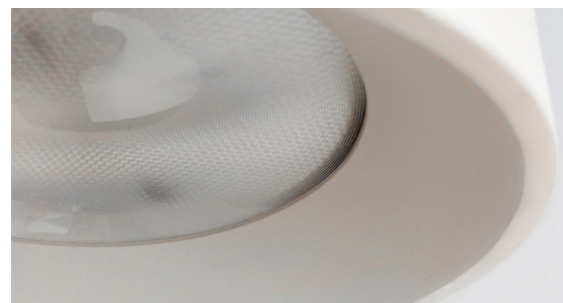

**Corpo**  
Policarbonato, dissipatore in pressof. di alluminio

**On req.:**

**Corpo** Cromie  
 Policarbonato, dissipatore in pressof. di alluminio