



HALL LED ESSENTIAL CEILING

ID 28



HALL LED ESSENTIAL CEILING

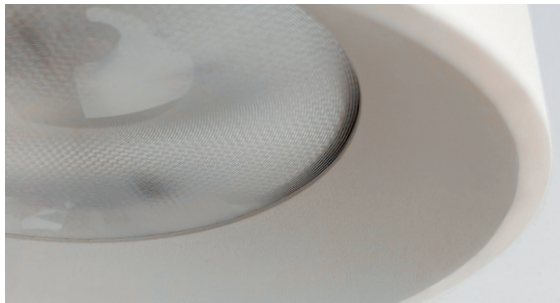

CE

B

RETILAP

5 YEARS WARRANTY

IP 44

CRI>90

Mac Adams 3

IK 02

L90/B10
50.000h


-20°
+35°

Corpo

Policarbonato,
dissipatore in
pressof. di alluminio

HALL LED ESSENTIAL CEILING

Diffusore in policarbonato opalino.
Fascio: 90°. Cut-off>10°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
28PG15K4	2083	28PG15K3	2053	15W	204
28PG21K4	3441	28PG21K3	3393	21W	204

CE

B

RETILAP

5 YEARS WARRANTY

IP 44

CRI>90

Mac Adams 3

IK 02

L90/B10
50.000h

-20°
+35°

On req.:

CODE K 27
2700K

Corpo

Policarbonato,
dissipatore in
pressof. di alluminio

Cromie