


HALL LED ESSENTIAL

ID 38



HALL LED ESSENTIAL

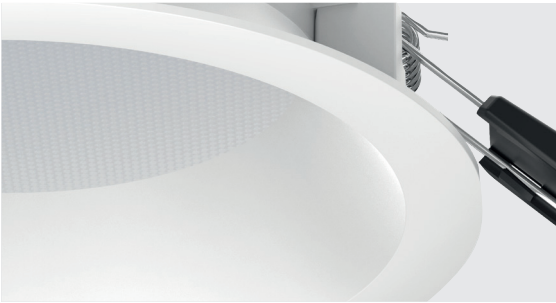

CE

RETAIL

5 YEARS WARRANTY

IP54

IK 02

RG0/PG1

Mac Adams 3

CRI>90

L90/B10 50.000h

-20°
+35°

Corpo

Policarbonato / dissipatore in pressofus. alluminio

HALL LED ESSENTIAL / MINI


Riflettore interno in policarbonato a microcelle e diffusore in policarbonato microprismatizzato opalino UGR<19. Cut-off>12°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
38MP2K4MN54	352	38MP2K3MN54	320	2W	82
38MP5K4MN54	627	38MP5K3MN54	570	5W	82

HALL LED ESSENTIAL / SMALL

Riflettore interno in policarbonato a microcelle e diffusore in policarbonato microprismatizzato opalino UGR<19. Cut-off>12°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
38MP7K4S54	1177	38MP7K3S54	1070	7W	142
38MP12K4S54	1947	38MP12K3S54	1770	12W	142

CE

RETAIL

5 YEARS WARRANTY

IP54

IK 02

RG0/PG1

Mac Adams 3

CRI>90

L90/B10 50.000h

-20°
+35°

On req.:

BT

1h EM

1h DEM

3h EM

RHL

Corpo

Cromie

Policarbonato / dissipatore in pressofus. alluminio

COD.B

COD.C8

HALL LED ESSENTIAL / MEDIUM


Riflettore interno in policarbonato a microcelle e diffusore in policarbonato microprismatizzato opalino UGR<19. Cut-off>10°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
38MP9K4M54	1469	38MP9K3M54	1423	9W	210
38MP14K4M54	2031	38MP14K3M54	1966	14W	210
38MP20K4M54	2842	38MP20K3M54	2743	20W	210
38MP26K4M54	3780	38MP26K3M54	3655	26W	210

HALL LED ESSENTIAL / LARGE

Riflettore interno in policarbonato a microcelle e diffusore in policarbonato microprismatizzato opalino UGR<19. Cut-off>10°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
38MP9K4L54	1469	38MP9K3L54	1423	9W	230
38MP14K4L54	2031	38MP14K3L54	1966	14W	230
38MP20K4L54	2842	38MP20K3L54	2743	20W	230
38MP26K4L54	3780	38MP26K3L54	3655	26W	230

ACCESSORI



Frame Ø280mm HALL LED ESSENTIAL LARGE per installazione su fori Ø230/250mm

38AAFR280EL

CE

RETI LAP

5 YEARS WARRANTY

IP54

IK 02

Mac Adams 3

CRI>90

RG0/ RG1

L90/B10 50.000h

On req.:

RHL

BT

1h EM

1h DEM

3h EM3H

Corpo

Cromie

Policarbonato / dissipatore in pressofus. alluminio

COD.B

COD.C8

-20°

+35°

DOWNLIGHT