



/ 2 2 6

HALL LED ESSENTIAL

2 2 7 /

HALL LED ESSENTIAL

Design ESSE-CI




η >105 lm/W

CRI >80

IP 44

UGR <19

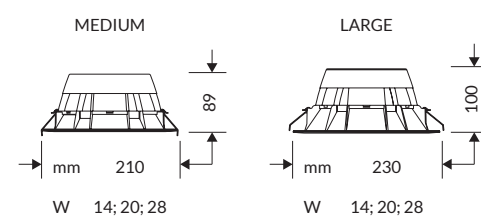



/ 2 2 8



HALL LED ESSENTIAL

HALL LED ESSENTIAL is perfect for retrofit applications where price and efficacy are of equal importance. Available in two diameters to directly replace 18W and 26W compact fluorescent fixtures.

HALL LED ESSENTIAL

2 2 9 /

SPECIFICATIONS

- SMD LED technology
- Colour temperature: 3000K/4000K
- CRI>80
- Mac Adams 3
- Life Time: L80/B50 >50.000h
- 5 years complete warranty
- Eye safety: risk-free (RG 0) in accordance with EN62471:2009

OPTICS

Microcell polycarbonate internal reflector and opal microprism polycarbonate diffuser. UGR<19.

BODY

Polycarbonate body and die-cast aluminum heat sink.

LEGAL REFERENCES

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

CERTIFICATIONS

CE IP44
ErP Class: A

COLOURS

White RAL 9003 - Code: B

ON REQUEST

- Wiring DALI dimmable - Code: RDD (verify the version available)
- Wiring with emergency kit - Code: EM for 1 hour / EM3H for 3 hours (verify the version available)
- Driver Bluetooth - Code: BT

VERSIONS

HALL LED ESSENTIAL MEDIUM
HALL LED ESSENTIAL LARGE




/ 2 3 0


HALL LED ESSENTIAL MEDIUM

OPTIC

Microcell polycarbonate internal reflector and opal microprism polycarbonate diffuser. UGR<19.

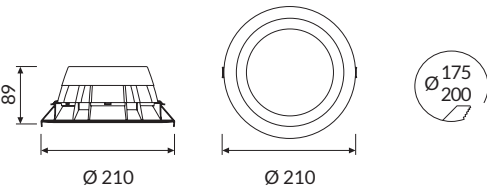

IP44 A

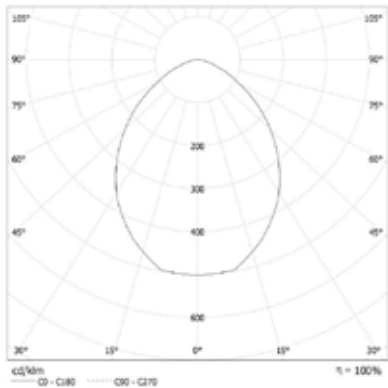

COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm
38MP14L4M	14W 4000K	1500
38MP20L4M	20W 4000K	2100
38MP28L4M	28W 4000K	2700

3 0 0 0 K

COD		lm
38MP14L3M	14W 3000K	1480
38MP20L3M	20W 3000K	2080
38MP28L3M	28W 3000K	2680




HALL LED ESSENTIAL

2 3 1 /


HALL LED ESSENTIAL LARGE

OPTIC

Microcell polycarbonate internal reflector and opal microprism polycarbonate diffuser. UGR<19.

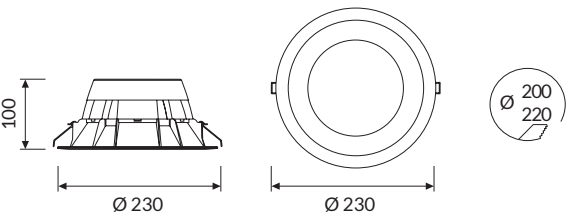

IP44 A

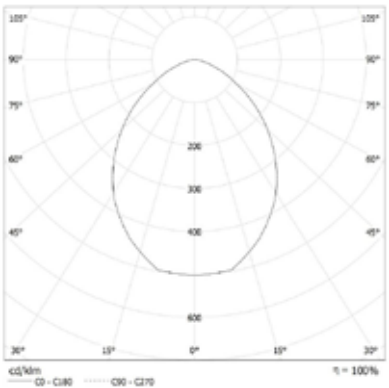

COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm
38MP14L4L	14W 4000K	1500
38MP20L4L	20W 4000K	2100
38MP28L4L	28W 4000K	2700

3 0 0 0 K

COD		lm
38MP14L3L	14W 3000K	1480
38MP20L3L	20W 3000K	2080
38MP28L3L	28W 3000K	2680