



HALL LED GROUND






The **HALL LED** family expands with the **GROUND** version, suitable for **recessed ground installation** to illuminate passageways or green areas.

ID 38









esse-ci

FEATURES

-  UGR <22
-  IP 67
-  IK 10
-  -20°C / +40°C
-  20 KN



LED

-  3000K
-  >115 lm/W
-  CRI >80
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  EEA Conformity
-  Energy efficiency
-  5 years warranty

ON REQUEST

-  DALI - code D*
-  4000K - code K4*

SPECIFICATIONS

CoB LED technology.
MINI AL: polymethacrylate lens, beam angles: 8° -24°- 36°.
MINI TX - 2X - 4X: frosted glass with single, double, quadruple emission.
MEDIUM AL: polymethacrylate lens, beam 25°- 45°- 60°- 80°.
MEDIUM HA: intensive asymmetrical lens with internal aluminum reflector.
MEDIUM WA: wide beam asymmetrical lens with internal aluminum reflector.

BODY

Aluminum with epoxy powder coating.

COLORS

Stainless steel.

* Where available

HALL LED GROUND MINI ACCENT LIGHT


Accessories on page 304. **IP 67** **IK10**

Internal polycarbonate lens.

Beam angle: 8° - 24° - 36°.

CUT OFF > 30°.

Remote driver as accessory. Fixtures supplied with 5mt cable.

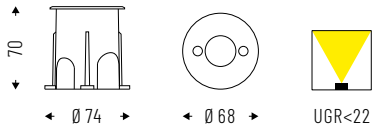

| Cod. | Icon | lm | Ø mm |
|--------------|--------|-----|------|
| 38AL3K38T67 | 3W 8° | 189 | 68 |
| 38AL3K324T67 | 3W 24° | 189 | 68 |
| 38AL3K336T67 | 3W 36° | 189 | 68 |




HALL LED GROUND MINI 1X

Accessories on page 304. **IP 67** **IK10**

Satin glass with single emission mask.

CUT OFF > 30°.

Remote driver as accessory. Fixtures supplied with 5mt cable.

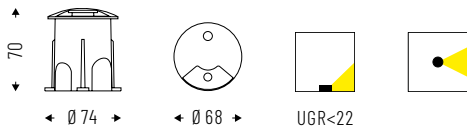

| Cod. | Icon | lm | Ø mm |
|------------|------|-----|------|
| 38HS3K3T67 | 3W | 189 | 68 |





HALL LED GROUND ^{MINI 2X}

Accessories on page 304. **IP67** **IK10**

Satin glass with double emission mask.
CUT OFF > 30°.

Remote driver as accessory. Fixtures supplied with 5mt cable.

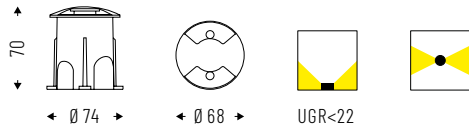

| Cod. |  | lm | Ø mm |
|------------|---|-----|------|
| 38HD3K3T67 | 3W | 189 | 68 |





HALL LED GROUND ^{MINI 4X}

Accessories on page 304. **IP67** **IK10**

Satin glass with quadruple emission mask.
CUT OFF > 30°.

Remote driver as accessory. Fixtures supplied with 5mt cable.

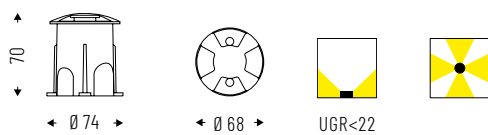

| Cod. |  | lm | Ø mm |
|------------|---|-----|------|
| 38HQ3K3T67 | 3W | 189 | 68 |




HALL LED GROUND MEDIUM ACCENT LIGHT

Accessories on page 304. **IP 67** **IK10**

Internal polycarbonate lens.
 Beam angles: 25° - 45° - 60° - 80°.
 CUT OFF > 30°.

Built-in driver.

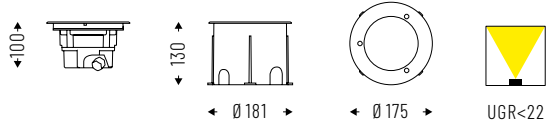

| Cod. | Beam angle | lm | Ø mm |
|----------------|------------|------|------|
| 38AL13K325TM67 | 13W 25° | 1495 | 175 |
| 38AL13K345TM67 | 13W 45° | 1495 | 175 |
| 38AL13K360TM67 | 13W 60° | 1495 | 175 |
| 38AL13K380TM67 | 13W 80° | 1495 | 175 |




HALL LED GROUND MEDIUM HIGH WALLWASHER

Accessories on page 304. **IP 67** **IK10**

Internal polycarbonate lens.
 Beam angles: 25° - 45° - 60° - 80°.
 CUT OFF > 30°.

Built-in driver.

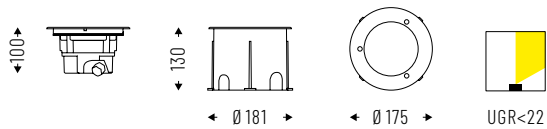

| Cod. | Beam angle | lm | Ø mm |
|--------------|------------|------|------|
| 38HA13K3TM67 | 13W | 1495 | 175 |




HALL LED GROUND MEDIUM WIDE WALLWASHER

Accessories on page 304. **IP 67** **IK10**

Internal polycarbonate lens.
 Beam angles: 25° - 45° - 60° - 80°.
 CUT OFF > 30°.

Built-in driver.

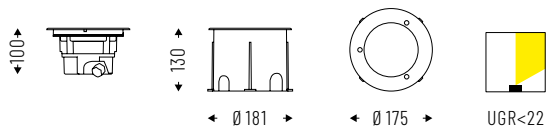

| Cod. | Beam angle | lm | Ø mm |
|--------------|------------|------|------|
| 38WA13K3TM67 | 13W | 1495 | 175 |



ACCESSORIES



PER HALL LED GROUND MINI



Constant current LED driver for single connection..

38LC4700IS



Constant current LED driver for 2 fixtures.

38LC12700IS



Constant current LED driver for 4 fixtures.

38LC17700IS

PER HALL LED GROUND MEDIUM



Honeycomb optic.

38AANDHG



Micro-engraved glass.

38AASLHG





Frosted glass.

38AAGMHG

TECHNICAL NOTES





HIGH WALLWASHER

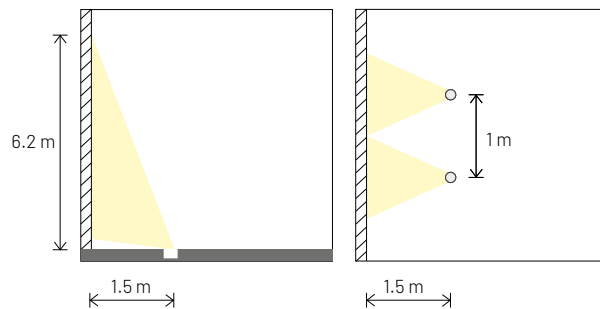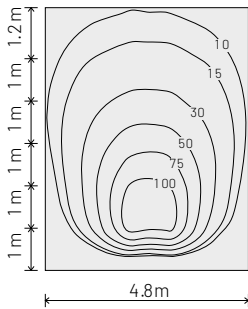

Recommended installation distance.

WIDE WALLWASHER

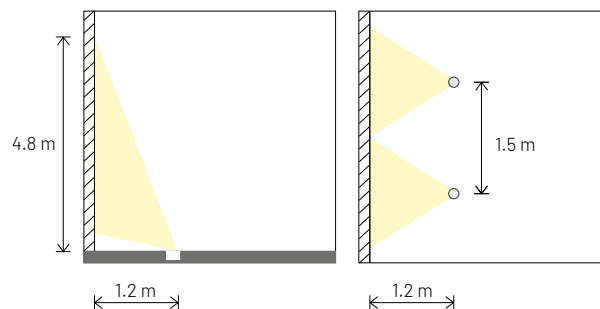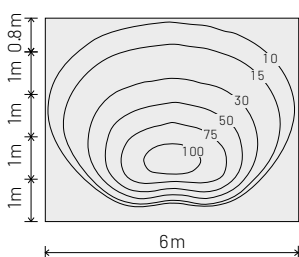

Recommended installation distance.