



/ 2 4 6

HALL LED IP65

2 4 7 /

HALL LED IP65

Design ESSE-CI




η >105 lm/W; >135 lm/W

CRI >80

IP 65; 66

UGR <19

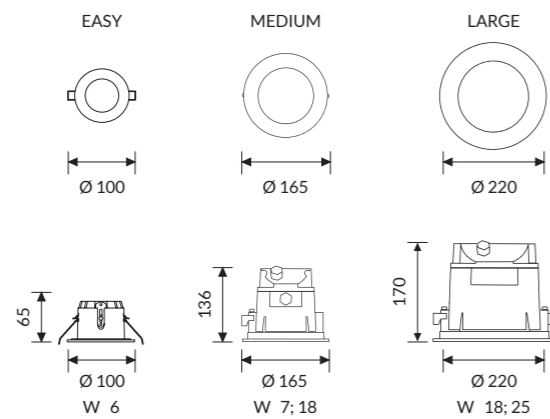



HALL LED IP65

Series of LED Downlights for a functional and architectural lighting, which enhances the elements of the space, keeping behind the scenes: thanks to the integrated driver can always offer elegant and compact solutions. The high degree of protection makes hall led IP65 suitable also for outdoor application.

SPECIFICATIONS

- CoB LED technology
- Integrated driver
- Colour temperature: 3000K/4000K
- CRI>80
- Mac Adams 3
- Life Time: L80/B50 >50.000h
- 5 years complete warranty
- Eye safety: risk-free (RG 0) in accordance with EN62471:2009

OPTICS

EASY: internal aluminium reflectors from 15°- 24°- 36°- 50° beam angles
MEDIUM e LARGE: internal aluminium reflectors from 10°- 12°- 20°- 40°- 70° beam angles

BODY

Manufactured from pressure die-cast aluminum with epoxy powder coating.

LEGAL REFERENCES

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

CERTIFICATIONS

CE IP65 IP66
ErP Class: A

COLOURS

White RAL 9003 - Code: B
Black RAL 9005 - Code: C8

ON REQUEST

- Wiring DALI dimmable - Code: RDD (verify the version available)
- Colour Temperature 5000K

VERSIONS

HALL LED IP65 EASY
HALL LED IP65 MEDIUM
HALL LED IP65 LARGE
ACCESSORIES






/ 2 5 0

HALL LED IP 6 5 EASY



OPTIC

Internal aluminum reflectors:
15°- 24°- 36°- 50° beam angles.
CUT OFF > 30°.

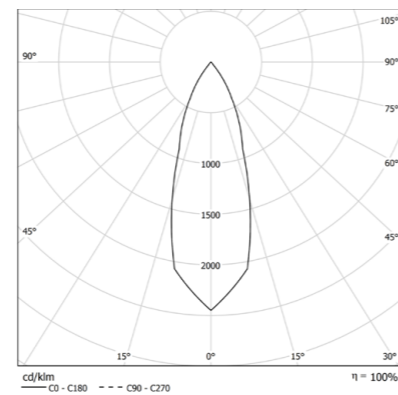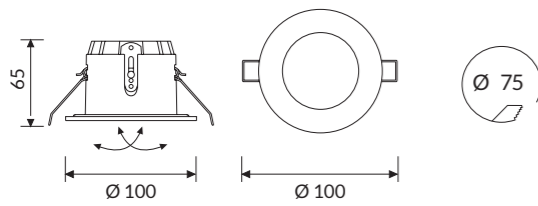



2 5 1 /

HALL LED IP 6 5 MEDIUM



OPTIC

Internal aluminum reflectors:
10°- 20°- 40°- 70° beam angles.
CUT OFF > 30°.

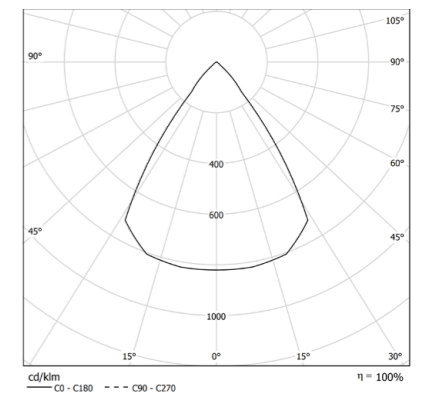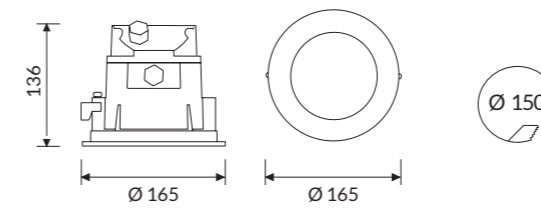

COLOUR TEMPERATURE //

4 0 0 0 K

| COD | | lm |
|--------------|--------------|-----|
| 38VT6L415E65 | 6W 15° 4000K | 644 |
| 38VT6L424E65 | 6W 24° 4000K | 644 |
| 38VT6L436E65 | 6W 36° 4000K | 644 |
| 38VT6L450E65 | 6W 50° 4000K | 644 |

3 0 0 0 K

| COD | | lm |
|--------------|--------------|-----|
| 38VT6L315E65 | 6W 15° 3000K | 623 |
| 38VT6L324E65 | 6W 24° 3000K | 623 |
| 38VT6L336E65 | 6W 36° 3000K | 623 |
| 38VT6L350E65 | 6W 50° 3000K | 623 |

COLOUR TEMPERATURE //

4 0 0 0 K

| COD | | lm |
|---------------|---------------|------|
| 38VT7L410M65 | 7W 10° 4000K | 704 |
| 38VT7L420M65 | 7W 20° 4000K | 704 |
| 38VT7L440M65 | 7W 40° 4000K | 704 |
| 38VT7L470M65 | 7W 70° 4000K | 704 |
| 38VT18L410M65 | 18W 10° 4000K | 1715 |
| 38VT18L420M65 | 18W 20° 4000K | 1715 |
| 38VT18L440M65 | 18W 40° 4000K | 1715 |
| 38VT18L470M65 | 18W 70° 4000K | 1715 |

3 0 0 0 K

| COD | | lm |
|---------------|---------------|------|
| 38VT7L310M65 | 7W 10° 3000K | 674 |
| 38VT7L320M65 | 7W 20° 3000K | 674 |
| 38VT7L340M65 | 7W 40° 3000K | 674 |
| 38VT7L370M65 | 7W 70° 3000K | 674 |
| 38VT18L310M65 | 18W 10° 3000K | 1644 |
| 38VT18L320M65 | 18W 20° 3000K | 1644 |
| 38VT18L340M65 | 18W 40° 3000K | 1644 |
| 38VT18L370M65 | 18W 70° 3000K | 1644 |



/ 2 5 2



HALL LED IP65 LARGE



OPTIC

Internal aluminum reflectors:
12°- 20°- 40°- 70° beam angles.
CUT OFF > 30°.

IP 66 A

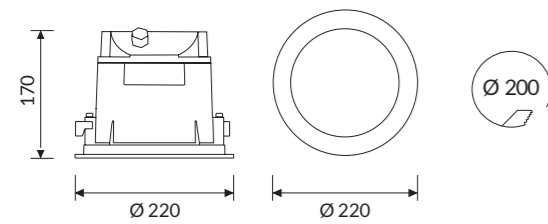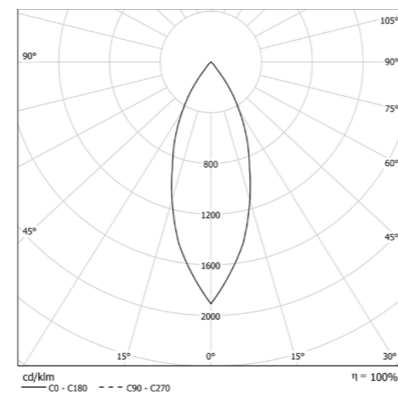

COLOUR TEMPERATURE //

4 0 0 0 K

| COD | Light Bulb Icon | lm |
|---------------|-----------------|------|
| 38VT18L412L65 | 18W 12° 4000K | 2490 |
| 38VT18L420L65 | 18W 20° 4000K | 2490 |
| 38VT18L440L65 | 18W 40° 4000K | 2490 |
| 38VT18L470L65 | 18W 70° 4000K | 2490 |
| 38VT25L412L65 | 25W 12° 4000K | 3388 |
| 38VT25L420L65 | 25W 20° 4000K | 3388 |
| 38VT25L440L65 | 25W 40° 4000K | 3388 |
| 38VT25L470L65 | 25W 70° 4000K | 3388 |


3 0 0 0 K

| COD | Light Bulb Icon | lm |
|---------------|-----------------|------|
| 38VT18L312L65 | 18W 12° 3000K | 2409 |
| 38VT18L320L65 | 18W 20° 3000K | 2409 |
| 38VT18L340L65 | 18W 40° 3000K | 2409 |
| 38VT18L370L65 | 18W 70° 3000K | 2409 |
| 38VT25L312L65 | 25W 12° 3000K | 3277 |
| 38VT25L320L65 | 25W 20° 3000K | 3277 |
| 38VT25L340L65 | 25W 40° 3000K | 3277 |
| 38VT25L370L65 | 25W 70° 3000K | 3277 |

HALL LED IP65


2 5 3 /

ACCESSORIES

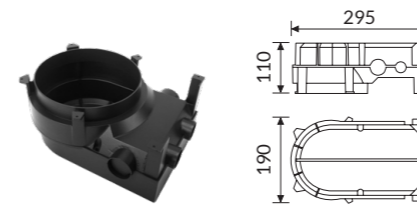

38AABCM

HALL LED IP65 MEDIUM box for recessed installation on concrete.

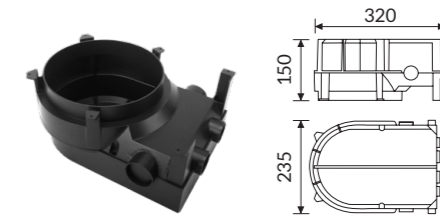

38AABCL

HALL LED IP65 LARGE box for recessed installation on concrete.

TECHNICAL NOTE

