

HALL LED IP66

ID 38



HALL LED IP66
PC



HALL LED IP66
ACCENT LIGHT



HALL LED IP66
HIDE/WIDE WALL WASHER



CE

RETI LAP

5 YEARS WARRANTY

IP 66

IK 06

CRI>90

RG0/RG1


L90/B10 50.000h

Mac Adams 3

Die-cast aluminium

HALL LED IP66 / MEDIUM PC


Polycarbonate lens.
Beam angle: 15°–24°–36°–50°–70°. Cut-off >30°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
38PC6K415M66	693	38PC6K315M66	648	6W 15°	165
38PC6K424M66	693	38PC6K324M66	648	6W 24°	165
38PC6K436M66	693	38PC6K336M66	648	6W 36°	165
38PC6K450M66	693	38PC6K350M66	648	6W 50°	165
38PC6K470M66	693	38PC6K370M66	648	6W 70°	165
38PC17K415M66	2071	38PC17K315M66	1936	17W 15°	165
38PC17K424M66	2071	38PC17K324M66	1936	17W 24°	165
38PC17K436M66	2071	38PC17K336M66	1936	17W 36°	165
38PC17K450M66	2071	38PC17K350M66	1936	17W 50°	165
38PC17K470M66	2071	38PC17K370M66	1936	17W 70°	165

HALL LED IP66 / MEDIUM ACCENT LIGHT

AL - Accent Light (concentrating beam).
Transparent glass with an internal polymethyl methacrylate lens. Beam angles: 25°–45°–60°–80°. Cut-off>30°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
38AL13K425M66	1326	38AL13K325M66	1207	13W 25°	165
38AL13K445M66	1326	38AL13K345M66	1207	13W 45°	165
38AL13K460M66	1326	38AL13K360M66	1207	13W 60°	165
38AL13K480M66	1326	38AL13K380M66	1207	13W 80°	165

CE

RETI LAP

5 YEARS WARRANTY

IP 66

IK 06

CRI>90

RG0/RG1

L90/B10 50.000h

Mac Adams 3

Die-cast aluminium

On req. CODE - D

1h EM

1h DEM

3h EM

CODE K5 5000K

Colours

COD.B

COD.C8

ONREQ.

HALL LED IP66/ MEDIUM HIGH WALL WASHER

HW - High Wall Washer. Transparent glass with lens for narrow-beam asymmetric emission. Cut-off>30°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
38HA13K4M66	1326	38HA13K3M66	1207	13W	165

HALL LED IP66/ MEDIUM WIDE WALL WASHER


WW - Wide Wall Washer. Transparent glass with wide beam asymmetric lens. Cut-off>30°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
38WA13K4M66	1326	38WA13K3M66	1207	13W	165

HALL LED IP66 / LARGE PC

Polycarbonate lens.
Beam: 15°-24°-36°-50°-70°. Cut-off >30°.

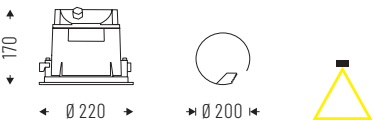

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
38PC17K415L66	2201	38PC17K315L66	2097	17W 15°	220
38PC17K424L66	2201	38PC17K324L66	2097	17W 24°	220
38PC17K436L66	2201	38PC17K336L66	2097	17W 36°	220
38PC17K450L66	2201	38PC17K350L66	2097	17W 50°	220
38PC17K470L66	2201	38PC17K370L66	2097	17W 70°	220
38PC24K415L66	3112	38PC24K315L66	2908	24W 15°	220
38PC24K424L66	3112	38PC24K324L66	2908	24W 24°	220
38PC24K436L66	3112	38PC24K336L66	2908	24W 36°	220
38PC24K450L66	3112	38PC24K350L66	2908	24W 50°	220
38PC24K470L66	3112	38PC24K370L66	2908	24W 70°	220

ACCESSORIES



HALL LED IP66 MEDIUM
Box for recessed
installation on concrete.

38AABCM



HALL LED IP66 LARGE
Box for recessed
installation on concrete.

38AABCL



Honeycomb optic.

38AAND66M - MEDIUM
38AAND66L - LARGE



Frosted glass
with gasket.

38AAVS66M - MEDIUM
38AAVS66L - LARGE

CE

RETI LAP

5 YEARS WARRANTY

IP66

CRI>90

Mac Adams 3

IK 06

RG0/RG1

L90/B10 50.000h

On req.:
CODE — D

1h EM

1h DEM

3h EM

CODE K5 5000K

Body

Die-cast aluminium

Colours

COD. B

COD. C8

ONREQ.

-20°

+40°