

HALL LED GROUND

ID CODE: 38






The HALL LED family expands with the GROUND version, suitable for **in-ground outdoor recessed applications**.

The collection consists of numerous sizes and outputs, with light distribution options that enable designers to consider **pathway lighting, orientation lighting and wall washing** with the dedicated asymmetric versions. A high ingress protection rating of IP67 is offered as standard.









Design
esse-ci


FEATURES

-  Direct Emission
-  UGR <22
-  IP 67
-  IK 10
-  -20°C +40°C
-  20 KN

LED

-  3000K
-  >63 lm/W; >115 lm/W
-  CRI >80
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

Specifications CoB LED technology.

Optic

- MINI AL: polymetacrilate lens, beam 8° - 24° - 36°
- MINI 1X -2X -4X: satin glass with single, double, quadruple emission
- MEDIUM AL: Internal polymetacrilate lens, beam angles from 25° - 45° - 60° - 80°
- MEDIUM HA: high asymmetrical lens with internal aluminum reflectors
- MEDIUM WA: wide asymmetrical lens with internal aluminum reflectors

Body Manufactured from pressure die-cast aluminum with epoxy powder coating.

Colour ● Stainless Steel




HALL LED GROUND MINI ACCENT LIGHT


OPTIC

Internal polymetacrilate lens.
Beam angles from 8°- 24°- 36°. CUT OFF > 30°.

Remote driver as accessory. Fixtures supplied with 5mt cable.

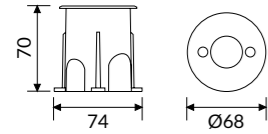

IP 67 A

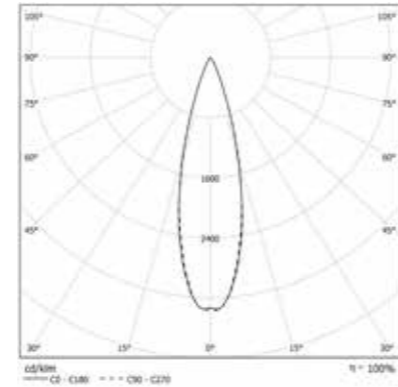

COLOUR TEMPERATURE

4000K


COD	💡	lm
38AL3L38T67	3W 8°	189
38AL3L324T67	3W 24°	189
38AL3L336T67	3W 36°	189

HALL LED GROUND MINI 2X


OPTIC

Satin glass with a double emission mask.
CUT OFF > 30°.

Remote driver as accessory. Fixtures supplied with 5mt cable.

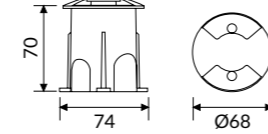

IP 67 A

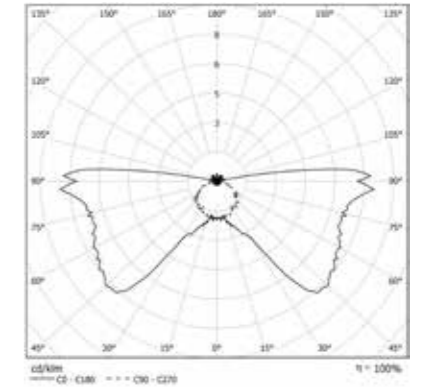

COLOUR TEMPERATURE

4000K


COD	💡	lm
38HD3L3T67	3W	189

HALL LED GROUND MINI 1X


OPTIC

Satin glass with a single emission mask.
CUT OFF > 30°.

Remote driver as accessory. Fixtures supplied with 5mt cable.

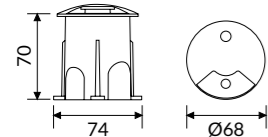

IP 67 A

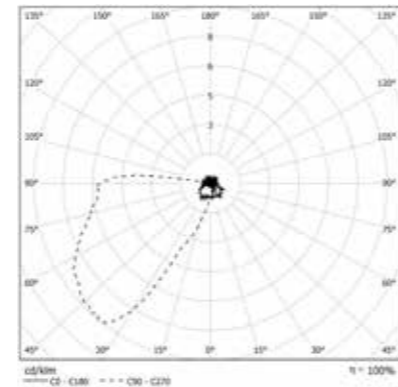

COLOUR TEMPERATURE

4000K


COD	💡	lm
38HS3L3T67	3W	189

HALL LED GROUND MINI 4X


OPTIC

Satin glass with a quadruple emission mask.
CUT OFF > 30°.

Remote driver as accessory. Fixtures supplied with 5mt cable.

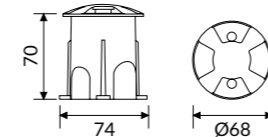

IP 67 A

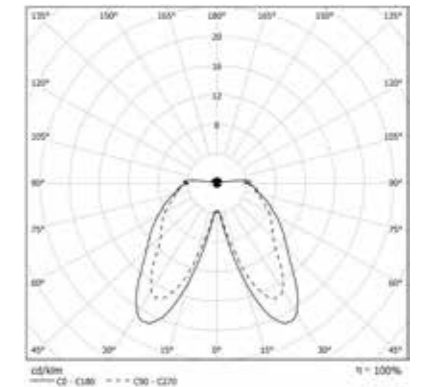

COLOUR TEMPERATURE

4000K


COD	💡	lm
38HQ3L3T67	3W	189

HALL LED GROUND MEDIUM ACCENT LIGHT


OPTIC

Internal polymetacrilate lens.
Beam angles from 25° - 45° - 60° - 80°.
CUT OFF > 30°.

Integrate driver.

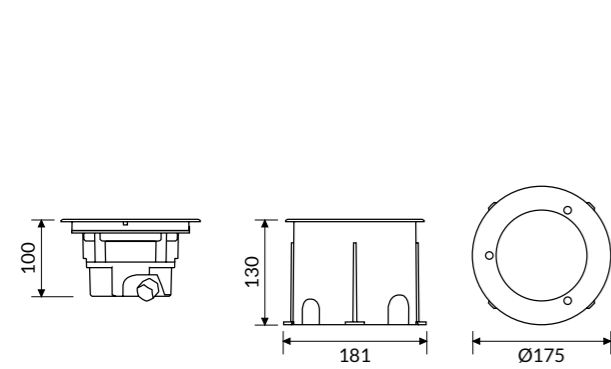

IP 67 A

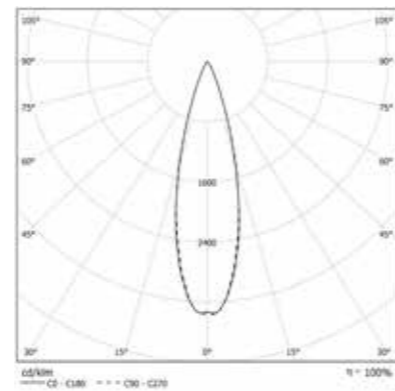

COLOUR TEMPERATURE

3000K

COD	💡	lm
38AL13L325TM67	13W 25°	1495
38AL13L345TM67	13W 45°	1495
38AL13L360TM67	13W 60°	1495
38AL13L380TM67	13W 80°	1495

HALL LED GROUND MEDIUM HIGH WALLWASHER



OPTIC

High asymmetrical lens with internal aluminum reflectors.
CUT OFF > 30°.

Integrate driver.



IP 67 A

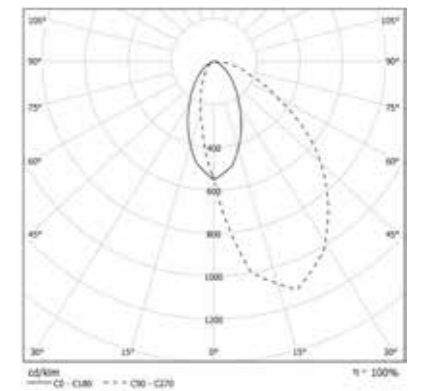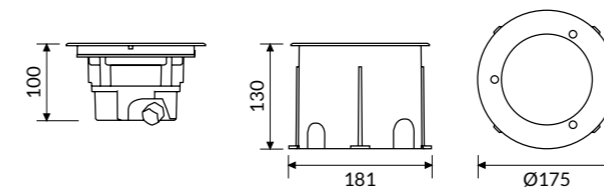

COLOUR TEMPERATURE

3000K

COD	💡	lm
38HA13L3TM67	13W	1495

HALL LED GROUND MEDIUM WIDE WALLWASHER



OPTIC

Wide asymmetrical lens with internal aluminum reflectors.
CUT OFF > 30°.

Integrate driver.



IP67 A

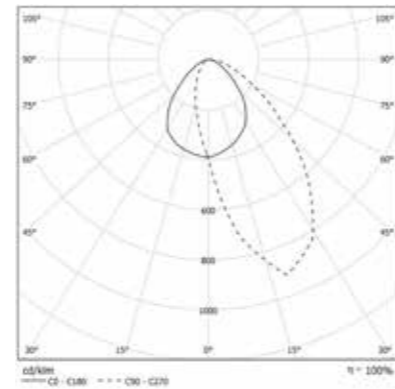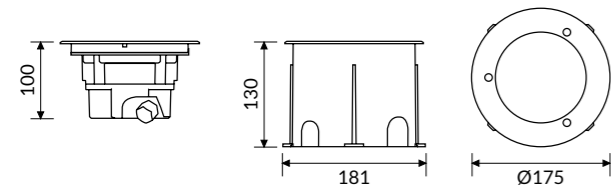

COLOUR TEMPERATURE

3000K

COD	Icon	lm
38WA13L3TM67		1495

Accessories

FOR HALL LED GROUND MINI



38LC4700IS
Constant current LED driver for single connection.



38LC12700IS
Constant current LED driver for 2 fixtures.



38LC17700IS
Constant current LED driver for 4 fixtures.

FOR HALL LED GROUND MEDIUM



38AANDHG
Honeycomb optic.





38AASLHG
Sculpture optic.



38AAGMHG
Frosted glass.



Technical Note

HIGH WALLWASHER

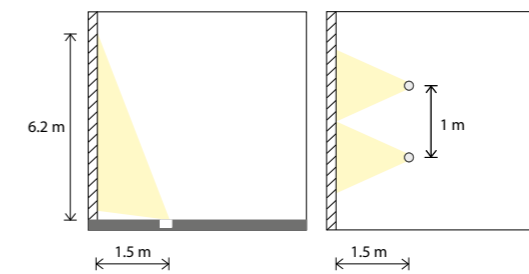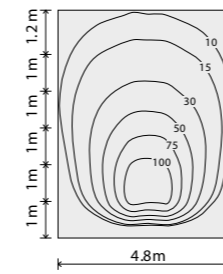

Recommended installation distance.

WIDE WALLWASHER

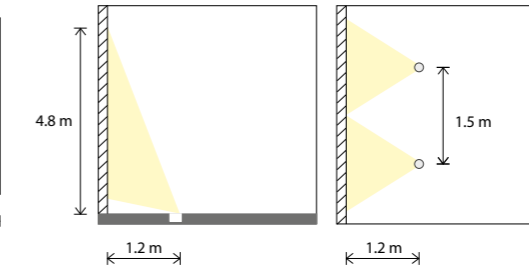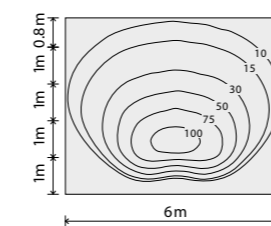

Recommended installation distance.