

HALL LED EDGE

ID 28

A modern interpretation of suspended elegance, **HALL LED EDGE** lights up spaces with refinement and a distinct architectural presence. This pendant luminaire, available in lengths of up to 1 metre, features a slender aluminum body with integrated driver. Its outer ring can be customised in four different colours, creating unique accents. It offers direct lighting or a direct/indirect combination, blending performance and formal elegance with extensive possibilities for personalisation.

☑ Features

- Direct emission
- Direct/indirect emission
- UGR<19
- IP 40

☑ Specifications

- Integrated driver
- LED CoB technology
- PC lenses 15°-24°-36°-50°

☐ Body

- Aluminum with epoxy powder coating

⊞ On request

- DALI – code D
- 2700K – code K27
- 5000K – code K5

🎨 Colours

- White RAL 9003 wrinkled – code W
- Black RAL 9005 wrinkled – code BK

💡 Led

- 3000K/4000K
- CRI>90
- Eye safety: RG0 / RG1
- Mac Adams 3
- L80/B10 >50.000h


★ Certifications

- CE Conformity
- Energy efficiency class E
- 5 years warranty



HALL LED EDGE_____MINI

PC lens 15°–24°–36°–50°. External ring included.

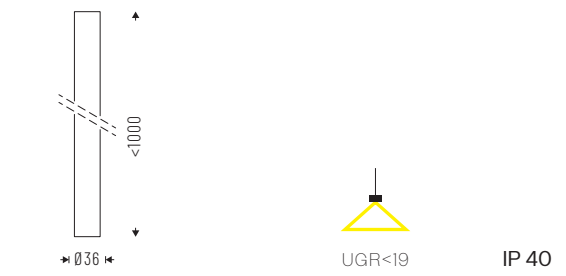


Cod. 4000K	Led	lm	Ømm
28DR5K415MN	5W 15°	360	36
28DR5K424MN	5W 24°	360	36
28DR5K436MN	5W 36°	360	36
28DR5K450MN	5W 50°	360	36
28DR8K415MN	8W 15°	574	36
28DR8K424MN	8W 24°	574	36
28DR8K436MN	8W 36°	574	36
28DR8K450MN	8W 50°	574	36



Cod. 3000K	Led	lm	Ømm
28DR5K315MN	5W 15°	318	36
28DR5K324MN	5W 24°	318	36
28DR5K336MN	5W 36°	318	36
28DR5K350MN	5W 50°	318	36
28DR8K315MN	8W 15°	508	36
28DR8K324MN	8W 24°	508	36
28DR8K336MN	8W 36°	508	36
28DR8K350MN	8W 50°	508	36

HALL LED EDGE_____

PC lens 15°–24°–36°–50°. External ring included.

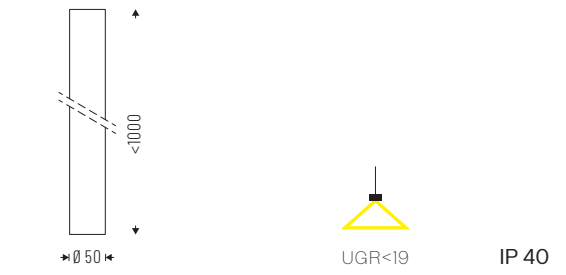


Cod. 4000K	Led	lm	Ømm
28DRI5K415	15W 15°	1635	50
28DRI5K424	15W 24°	1635	50
28DRI5K436	15W 36°	1635	50
28DRI5K450	15W 50°	1635	50



Cod. 3000K	Led	lm	Ømm
28DRI5K315	15W 15°	1530	50
28DRI5K324	15W 24°	1530	50
28DRI5K336	15W 36°	1530	50
28DRI5K350	15W 50°	1530	50

HALL LED EDGE_____DI

PC lens 15°–24°–36°–50°. External ring included.

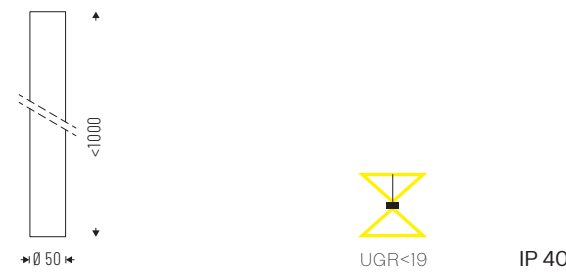

Cod. 4000K	Led	lm	Ømm
28DI18K415	15W+3W 15°	1962	50
28DI18K424	15W+3W 24°	1962	50
28DI18K436	15W+3W 36°	1962	50
28DI18K450	15W+3W 50°	1962	50



Cod. 3000K	Led	lm	Ømm
28DI18K315	15W+3W 15°	1836	50
28DI18K324	15W+3W 24°	1836	50
28DI18K336	15W+3W 36°	1836	50
28DI18K350	15W+3W 50°	1836	50

ACCESSORIES



External ring.

Ceiling kit for suspended installation with 3-5 pole power rose and 3000mm cable.

28RFMNA - MINI Chrome
28RFMNG - MINI Gold
28RFMNW - MINI White
28RFMNBK - MINI Black

28AA165PS

28RFA - Chrome
28RFG - Gold
28RFW - White
28RFBK - Black

TECHNICAL NOTES

HALL LED EDGE offers the possibility to change the outer ring by choosing from four different colours.

