



/ 2

ISEB LED

3 /

ISEB LED

Design ESSE-CI



η >112 lm/W

CRI >80; >90

IP 20; 40

UGR <19; <22





ISEB LED

The lighting fixtures of this series for ceiling application stand out for the extremely low profile which gives a very attractive design.

Thanks to the high efficiency optic it can be used in all contexts of the tertiary sector.

SPECIFICATIONS

- Colour temperature: 3000K/4000K
- CRI>80; CRI>90
- Mac Adams 3
- Life Time 50.000 h - 5 years complete warranty
- Eye safety: risk-free (RG 0) in accordance with EN62471:2009

OPTICS

- Opal PG cover UGR<22
- Clear MP microprismatic cover UGR<19
- Dark Light semi-specular aluminum 99.85 category C2 optics. LED modules are protected by a semiopal plastic cover.

BODY

The body is made by white epoxy-powder coated steel-sheet.

LEGAL REFERENCES

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

CERTIFICATIONS

CE IP20 IP40
ErP Class: A*

ON REQUEST

- Wiring DALI dimmable - Code: RDD (verify the version available)
- Wiring with emergency kit - Code: EM for 1 hour / EM3H for 3 hours

VERSIONS

ISEB LED PG
ISEB LED MP
ISEB LED DP Premium




ISEB LED PG




OPTIC

Opal PG cover. UGR<22

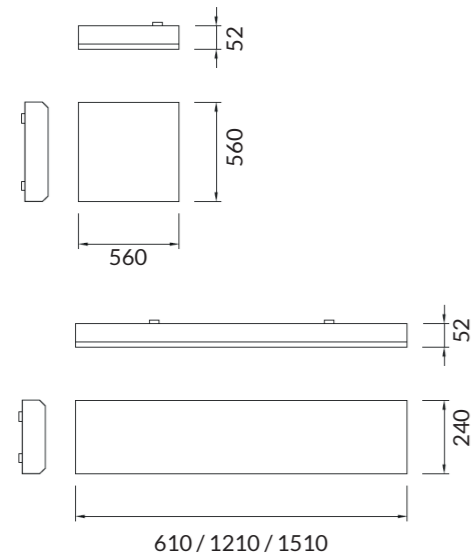

IP40 A+

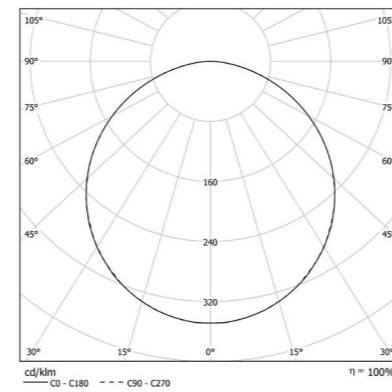

COLOUR TEMPERATURE //

4000 K

COD		lm	mm
24PG20L4M3	20W 4000K	2200	610x240
24PG36L4	36W 4000K	4100	560x560
24PG57L4	57W 4000K	6000	560x560
24PG38L4M3	38W 4000K	4400	1210x240
24PG44L4M3	44W 4000K	5000	1510x240
24PG63L4M3	63W 4000K	7000	1510x240

3000 K


COD		lm	mm
24PG20L3M3	20W 3000K	1980	610x240
24PG36L3	36W 3000K	3690	560x560
24PG57L3	57W 3000K	5400	560x560
24PG38L3M3	38W 3000K	3960	1210x240
24PG44L3M3	44W 3000K	4500	1510x240
24PG63L3M3	63W 3000K	6300	1510x240

ISEB LED MP




OPTIC

Clear MP microprismatic cover. UGR<19

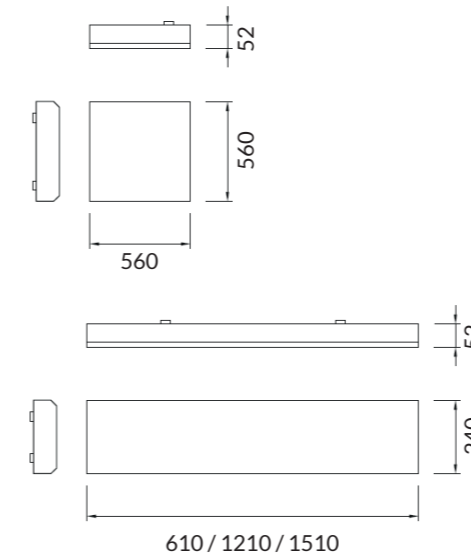

IP40 A+

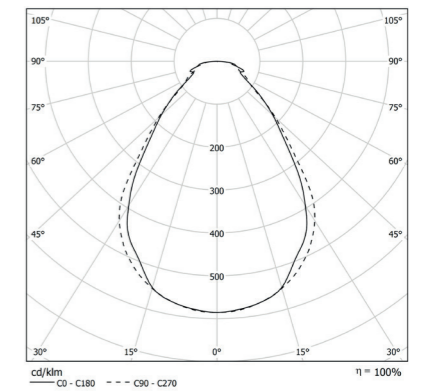

COLOUR TEMPERATURE //

4000 K

COD		lm	mm
24MP20L4M3	20W 4000K	2300	610x240
24MP36L4	36W 4000K	4300	560x560
24MP57L4	57W 4000K	6300	560x560
24MP38L4M3	38W 4000K	4600	1210x240
24MP44L4M3	44W 4000K	5300	1510x240
24MP63L4M3	63W 4000K	7450	1510x240

3000 K

COD		lm	mm
24MP20L3M3	20W 3000K	2047	610x240
24MP36L3	36W 3000K	3827	560x560
24MP57L3	57W 3000K	5607	560x560
24MP38L3M3	38W 3000K	4094	1210x240
24MP44L3M3	44W 3000K	4717	1510x240
24MP63L3M3	63W 3000K	6631	1510x240

ISEB LED



ISEB LED DP Premium



OPTIC

Dark Light semi-specular aluminum 99.85 category C2 optics.
LED modules are protected by a semiopal plastic cover.

IP 20 ▶ A+

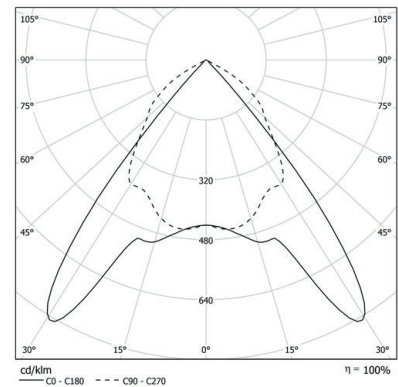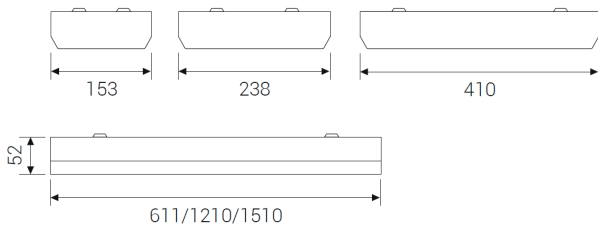

COLOUR TEMPERATURE //

4000 K

COD		lm	mm
24DP19L490	19W 4000K	2200	153x1210
24DP30L490	30W 4000K	3400	153x1510
24DP27L490	27W 4000K	3100	410x611
24DP37L490	37W 4000K	4200	410x611
24DP26L490	26W 4000K	3200	238x1210
24DP37L4L90	37W 4000K	4300	238x1210
24DP41L490	41W 4000K	5200	238x1510
24DP58L490	58W 4000K	6500	238x1510

3000 K

COD		lm	mm
24DP19L390	19W 3000K	1980	153x1210
24DP30L390	30W 3000K	3060	153x1510
24DP27L390	27W 3000K	2790	410x611
24DP37L390	37W 3000K	3780	410x611
24DP26L390	26W 3000K	2880	238x1210
24DP37L3L90	37W 3000K	3870	238x1210
24DP41L390	41W 3000K	4680	238x1510
24DP58L390	58W 3000K	5820	238x1510