



/ 2 9 6

ISI LED IP65

2 9 7 /

ISI LED IP65

Design ESSE-CI







η >95 lm/W; >112 lm/W

CRI >80

IP 65

UGR <19; <22

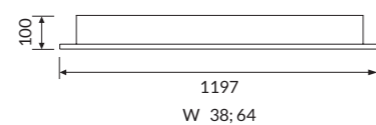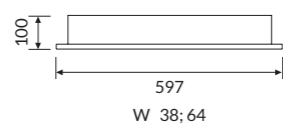



ISI LED IP65

Universal fixture for sterile environments, with LED technology, for false ceiling with visible and hidden structure.

SPECIFICATIONS

- Colour temperature: 3000K/4000K
- CRI>80
- Mac Adams 3
- Life Time: L80/B50 50.000h
- 5 years complete warranty
- Eye safety: risk-free (RG 0) in accordance with EN62471:2009
- Fixed power current driver, normal life time 50,000 h (at ta max. 50 ° C and ≤ 0.2% failure rate per 1,000 h)
- Suitable for emergency lighting units conf. EN 50172
- Quick connector for the connection standard provided

OPTICS

VDPL technology for controlled UGR with UGR<19
 VG with frosted glass diffuser for homogeneous emission, UGR<22
 Aluminum painted white frame.

BODY

Epoxy-powder coated steel-sheet body.

LEGAL REFERENCES

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

CERTIFICATIONS

CE IP65
 ErP Class: A+

ON REQUEST

- Wiring with DALI dimmable converter - Code: RDD (verify the version available)
- Wiring with emergency kit - Code: EM for 1 hour / EM3H for 3 hours (verify the version available)
- Colour Temperature: 5000K
- Ceiling version
- False ceiling with visible structure version 620x620mm
- CRI>90 Premium Version

VERSIONS

ISI LED IP65 VDPL
 ISI LED IP65 VG
 ACCESSORIES




/ 3 0 0

ISI LED IP 6 5 V D P L




OPTIC

VDPL technology with UGR<19 composed by a microprismatic internal sheet and a transparent protective glass. Aluminum painted white frame.

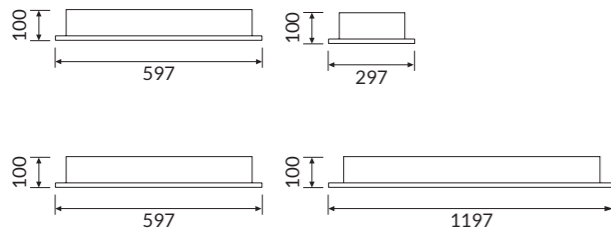

IP 65 A*

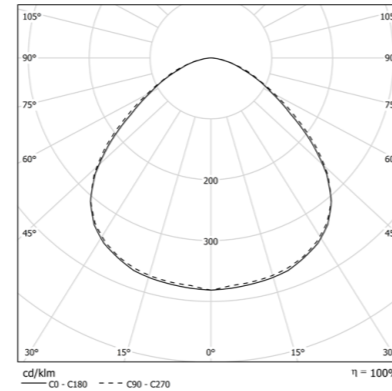

COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm	mm
31VDPL38L465	38W 4000K	3593	597x597
31VDPL64L465	64W 4000K	6592	597x597
31VDPL38L465M3	38W 4000K	3593	297x1197
31VDPL64L465M3	64W 4000K	6592	297x1197

3 0 0 0 K

COD		lm	mm
31VDPL38L365	38W 3000K	3368	597x597
31VDPL64L365	64W 3000K	6272	597x597
31VDPL38L365M3	38W 3000K	3368	297x1197
31VDPL64L365M3	64W 3000K	6272	297x1197



3 0 1 /


ISI LED IP 6 5

ISI LED IP 6 5 V G




OPTIC

Frosted tempered anti-glare glass, UGR<22.
Aluminum painted white frame.

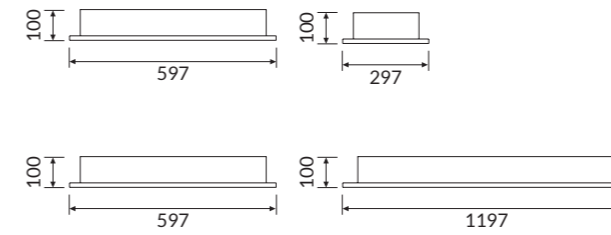

IP 65 A*

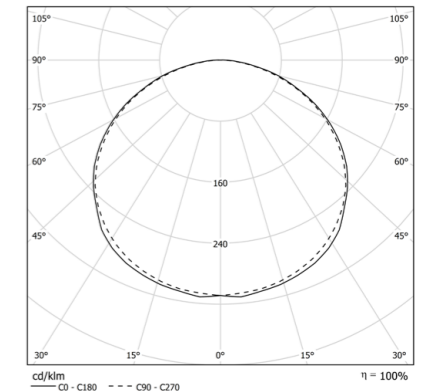

COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm	mm
31VG38L465	38W 4000K	3648	597x597
31VG64L465	64W 4000K	7168	597x597
31VG38L465M3	38W 4000K	3641	297x1197
31VG64L465M3	64W 4000K	7168	297x1197

3 0 0 0 K

COD		lm	mm
31VG38L365	38W 3000K	3416	597x597
31VG64L365	64W 3000K	6528	597x597
31VG38L365M3	38W 3000K	3409	297x1197
31VG64L365M3	64W 3000K	6520	297x1197

ACCESSORIES



KSFDP65

Kit of fixing brackets for installation on plasterboard, with hidden structure and on slats.