


# ISIB LED IP54

ID CODE: 34

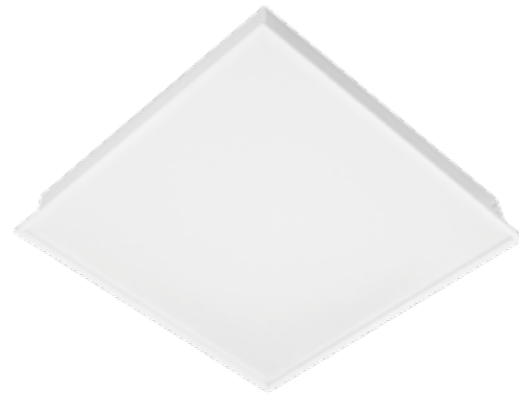


ISIB LED IP54 fixtures with back light LED technology are the perfect mix between **competitiveness, performance and flexibility**. Perfect homogeneous emission with frosted or microprismatic diffuser. Thanks to IP54, the range is also suitable in environments that require a high degree of protection.

The FCG34 accessory make the fixtures installable also on plasterboard.









Design  
esse-ci

## FEATURES

-  Direct Emission
-  UGR < 22
-  IP 54 (from the front)




## LED

-  3000K/4000K
-  >112 lm/W
-  CRI > 90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

## CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

## ON REQUEST

-  DALI - RDD code (verify the version)
-  Emergency kit 1/3 hour EM/EM 3h code
-  False ceiling structure 625x625mm

**Specifications** · Integrated driver  
· Quick connector for easy wiring

**Optic** · Frosted acrylic diffuser high homogeneity glued to the body, UGR<22  
· Additional microprismatic plate for lay-in on the structure, UGR<19


**Body** The body is made from white epoxy-powder coated steel-sheet.





# ISIB LED IP54 PG

## OPTIC

Frosted high homogeneity acrylic diffuser glued to the body, UGR<22.

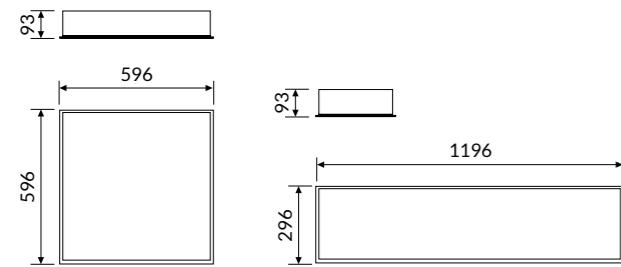

IP 54 A+

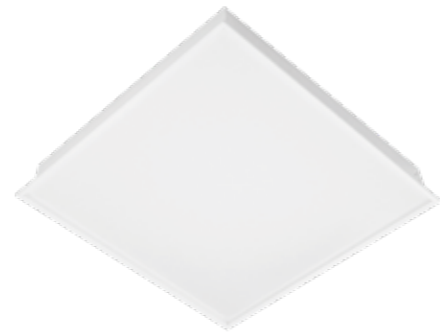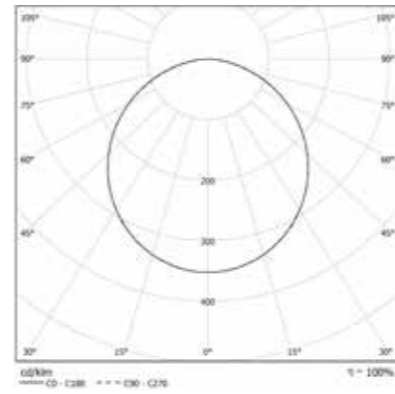

## Accessories



**LMISIMP3454:** for 594x594mm

**LMISIMP34M354:** for 294x1194mm

Microprismatic plate (UGR < 19) for mounting on ceiling module 600 with visible structure.



**FCG3454:** for 600x600mm

**FCG34M354:** for 300x1200mm

Plasterboard frame.

### COLOUR TEMPERATURE

4000K

3000K

COD	💡	lm	mm
34PG34L49054	34W	3952	596x596
34PG34L490M354	34W	3952	296x1196
34PG55L49054	55W	6175	596x596

COD	💡	lm	mm
34PG34L39054	34W	3786	596x596
34PG34L390M354	34W	3786	296x1196
34PG55L39054	55W	5558	596x596