

JOOLS WALL

ID CODE: 11

JOOLS LV is a **powerful compact light** for wall installation. With bi-directional light emission it is designed for professional applications, such as boutique retail or hospitality. Jools Wall is perfectly complimented by the versions for ceiling mounting, wire suspending and track mounting.




See also:

JOOLS suspended/ceiling p. 148
JOOLS LV p. 336









Design
Serge & Robert Cornelissen

FEATURES

-  Direct/Indirect Emission
-  UGR <19
-  IP 40


LED

-  3000K/4000K
-  >99 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

ON REQUEST

-  2700K - 5000K

Specifications LED CoB technology.

Optic · Diffused satin PC for indirect emission
· Direct emission with PC lens. CUT-OFF>30°

Body Spun aluminum with epoxy powder coating.

Colour ○ White RAL 9003 wrinkled - Code: W
● Black RAL 9005 wrinkled - Code: BK
● Champagne Anodized - Code: C67

WALL - FLOOR

JOOLS WALL




WALL/FLOOR


JOOLS WALL

OPTIC

Diffused satin PC for indirect emission.
 Direct emission with PC lens. CUT-OFF > 30°
 Beam angle: 14° - 35° - 55° with adjustable emission.

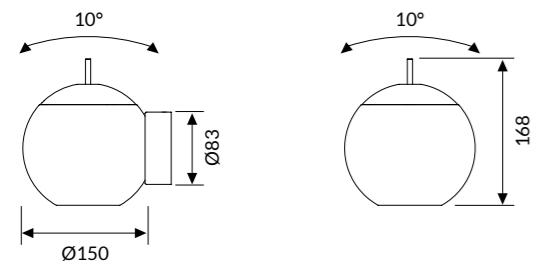

IP 40 A+

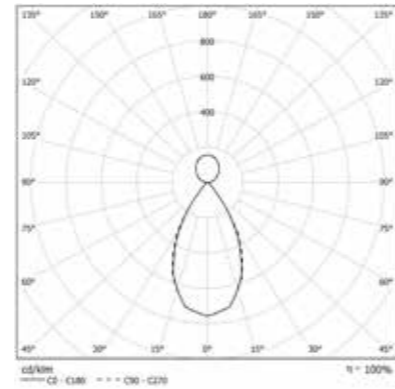

DIRECT // INDIRECT EMISSION

Ø (mm)	Power Direct Mod.	Power Indirect Mod.
150	12W	7W

COLOUR TEMPERATURE


4000K

COD	Light Bulb Icon	lm	Ø (mm)
11DI19L490W14	19W 14°	1881	150
11DI19L490W35	19W 35°	1881	150
11DI19L490W55	19W 55°	1881	150

3000K

COD	Light Bulb Icon	lm	Ø (mm)
11DI19L390W14	19W 14°	1768	150
11DI19L390W35	19W 35°	1768	150
11DI19L390W55	19W 55°	1768	150

Technical Note

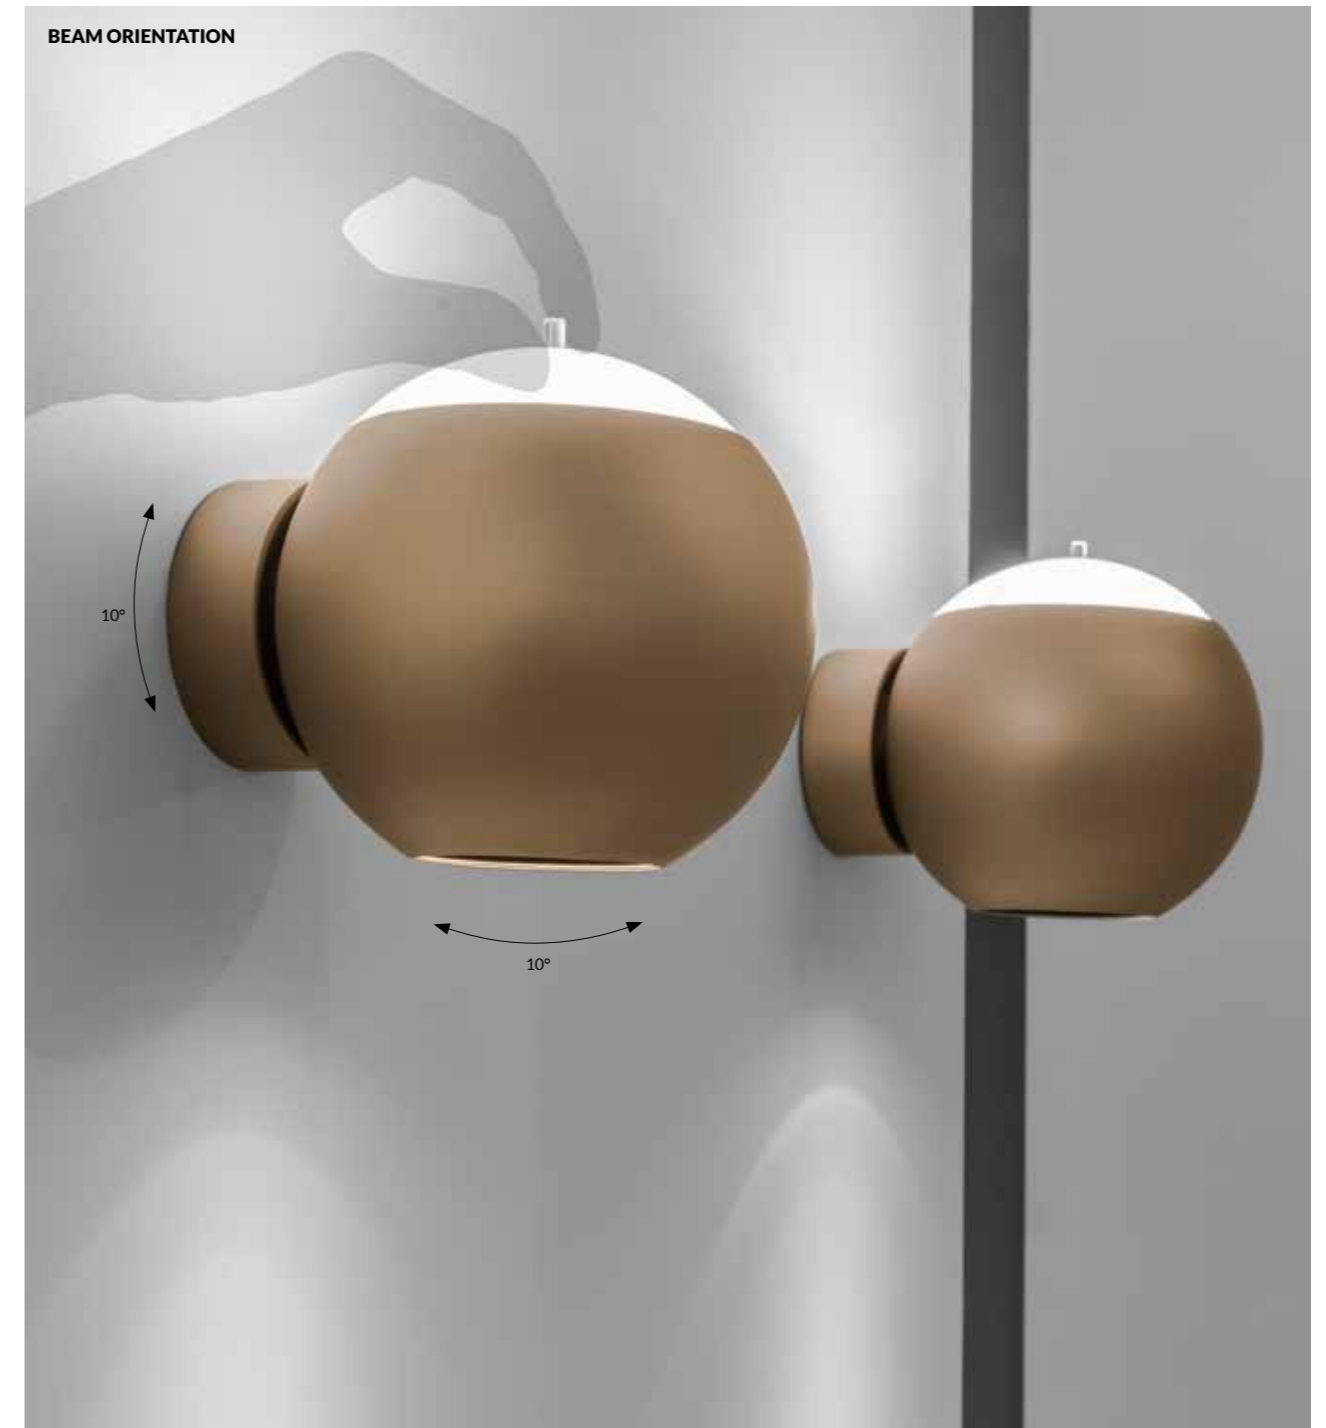

WALL / FLOOR