

FEATURES

-  Direct emission
-  UGR <19; <22
-  IP 40

LED

-  3000K/4000K
-  >105 lm/W
-  CRI >90
-  Eye safety: R60/R61
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  EEA Conformity
-  Energy efficiency
-  5 years warranty

ON REQUEST

-  DALI - code D
-  Bluetooth - code BT*
-  Emergency 1 hr - code EM
Emergency 3 hrs - code EM3R*
-  5000K - code K5*

SPECIFICATIONS

Built-in driver.
MP technology for controlled
UGR, with UGR <19.
PG diffuser for homogeneous
emission, with UGR <22.

BODY

Aluminum with epoxy
powder coating.

RELATED PRODUCTS

Lite recessed (P. 116)



LITE

LITE is a luminaire with a **minimal design and a compact section**, for ceiling and suspended mount. The power supply electronics are integrated into the body, while the closed optical system is protected against dust and accidental damage during installation. **The high efficiency LED modules** ensure **unmatched homogeneity** without precluding any light output. The **quick connection system** facilitates and speeds up the installation process.

ID 47




LITE MP CEILING

Accessories on page 112.

IP 40

Microprismatic diffuser with UGR <19 for environments with display screen equipment.



Cod. 4000K		lm	L mm
47MP52K4	52W	5304	596
47MP64K4	64W	6528	596


Cod. 3000K		lm	L mm
47MP52K3	52W	4985	596
47MP64K3	64W	6135	596

LITE PG CEILING

Accessories on page 112.

IP 40

Methacrylate plate painted with opaline antistatic treatment for soft diffusing light emission, UGR<22.



Cod. 4000K		lm	L mm
47PG52K4	52W	5460	596
47PG64K4	64W	6720	596


Cod. 3000K		lm	L mm
47PG52K3	52W	5132	596
47PG64K3	64W	6316	596

LITE MP LONG CEILING

Accessories on page 112.

IP 40

Microprismatic diffuser with UGR <19 for environments with display screen equipment.



Cod. 4000K		lm	L mm
47MP26K4M3	26W	2652	596
47MP33K4M3	33W	3366	596
47MP52K4M3	52W	5304	1100
47MP64K4M3	64W	6528	1100
47MP78K4M3	78W	7956	1604
47MP99K4M3	99W	10098	1604


Cod. 3000K		lm	L mm
47MP26K3M3	26W	2492	596
47MP33K3M3	33W	3163	596
47MP52K3M3	52W	4985	1100
47MP64K3M3	64W	6135	1100
47MP78K3M3	78W	7477	1604
47MP99K3M3	99W	9488	1604

LITE PG LONG CEILING

Accessories on page 112.

IP 40

Methacrylate plate painted with opaline antistatic treatment for soft diffusing light emission, UGR<22.



Cod. 4000K		lm	L mm
47PG26K4M3	26W	2730	596
47PG33K4M3	33W	3465	596
47PG52K4M3	52W	5460	1100
47PG64K4M3	64W	6720	1100
47PG78K4M3	78W	8190	1604
47PG99K4M3	99W	10395	1604

Cod. 3000K		lm	L mm
47PG26K3M3	26W	2566	596
47PG33K3M3	33W	3256	596
47PG52K3M3	52W	5132	1100
47PG64K3M3	64W	6316	1100
47PG78K3M3	78W	7698	1604
47PG99K3M3	99W	9769	1604

ACCESSORIES



Adjustable suspension kit.
Cable length 1500mm /
3000mm.

47AA13
47AA1330




3 - 5 poles ceiling
power supply box.
Cable length 2000mm.

00AA16
00AA165P



LITE is the recessed installation luminaire characterized by its **minimal design and compact section**. The power supply electronics are integrated inside the body, while the closed **optical system is protected against dust and accidental damage** during installation. The **high-efficiency LED modules** ensure an elevated homogeneity without precluding light output.

ID 47

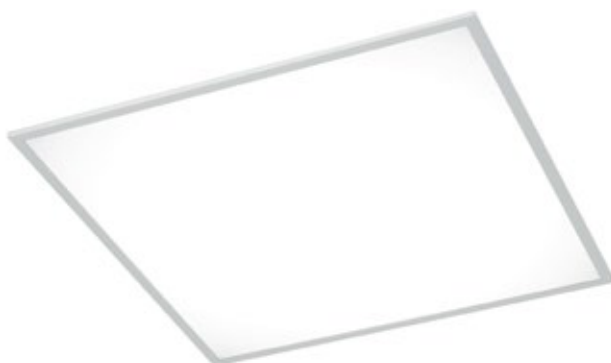

esse-ci

FEATURES

-  Direct emission
-  UGR <19; <22
-  IP 40

LED

-  3000K/4000K
-  >105 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  EEA Conformity
-  Energy efficiency
-  5 years warranty

ON REQUEST

-  DALI - code D
-  Bluetooth - code BT*
-  Emergency 1 hr - code EM
Emergency 3 hrs - code EM3R*
-  5000K - code K5*
-  False ceiling version
625x625mm*

SPECIFICATIONS

Built-in driver.
MP technology for controlled UGR, with UGR <19.
PG diffuser for homogeneous emission, with UGR <22.

BODY

Aluminum with epoxy powder coating.

RELATED PRODUCTS

Lite suspended/ceiling (P. 109)


* Where available

LITE MP RECESSED

IP 40

Microprismatic diffuser with UGR <19 for environments with display screen equipment.

For recessed installation on false ceiling with visible structure.



Cod. 4000K	Icon	lm	L mm
47MP52K4R	52W	5304	596
47MP64K4R	64W	6528	596




Cod. 3000K	Icon	lm	L mm
47MP52K3R	52W	4925	596
47MP64K3R	64W	6135	596

LITE PG RECESSED

IP 40

Methacrylate plate painted with opaline antistatic treatment for soft diffusing light emission, UGR <22.

For recessed installation on false ceiling with visible structure.



Cod. 4000K	Icon	lm	L mm
47PG52K4R	52W	5460	596
47PG64K4R	64W	6720	596



Cod. 3000K	Icon	lm	L mm
47PG52K3R	52W	5132	596
47PG64K3R	64W	6316	596

RECESSED

LITE MP LONG RECESSED

IP 40

Microprismatic diffuser with UGR <19 for environments with display screen equipment.

For recessed installation on false ceiling with visible structure.



Cod. 4000K		lm	L mm
47MP52K4M3V	52W	5304	1196
47MP64K4M3V	64W	6528	1196


Cod. 3000K		lm	L mm
47MP52K3M3V	52W	4925	1196
47MP64K3M3V	64W	6135	1196

LITE PG LONG RECESSED

IP 40

Methacrylate plate painted with opaline antistatic treatment for soft diffusing light emission, UGR<22.

For recessed installation on false ceiling with visible structure..



Cod. 4000K		lm	L mm
47PG52K4M3V	52W	5460	1196
47PG64K4M3V	64W	6720	1196

Cod. 3000K		lm	L mm
47PG52K3M3V	52W	5132	1196
47PG64K3M3V	64W	6316	1196