



/ 3 4 2

LITE

3 4 3 /

LITE

Design ESSE-CI




η >108 lm/W; >116 lm/W

CRI >80

IP 40

UGR <19; <22

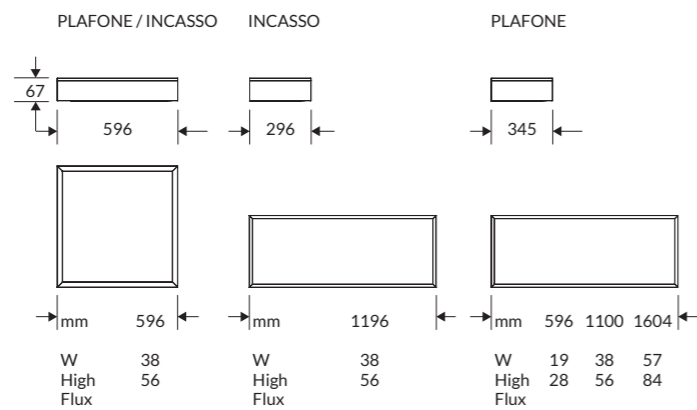



L I T E

Commercial fixture with highly efficient design and slim, compact profile for ceiling, suspended and installation applications. Features an integrated power supply. Closed optical system, sealed to IP40, protects against dust and accidental damage during installation.

High efficiency LED modules with integrated diffusing optic, guaranteeing extraordinary light homogeneity without compromising efficiency.

SPECIFICATIONS

- Integrated driver
- Colour temperature: 3000K/4000K
- CRI>80
- McAdams 3
- Life Time: L80/B50 50.000h
- 5 years complete warranty
- Eye safety: risk-free (RG 0) in accordance with EN62471:2009

OPTICS

DPL technology for controlled UGR<19
PG diffuser for diffused emission with UGR<22

BODY

Extruded aluminum body with epoxy powder coating.

LEGAL REFERENCES

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

CERTIFICATIONS

CE IP40

ErP Class: A+

COLOURS

White RAL 9003

ON REQUEST

- Wiring DALI dimmable - Code: RDD (verify the version available)
- Wiring with emergency kit - Code: EM for 1 hour / EM3H for 3 hours (verify the version available)
- Colour Temperature 5000K
- False ceiling with visible structure version 620x620mm
- Driver Bluetooth - Code: BT (verify the version available)

VERSIONS

LITE PG CEILING / RECESSED
 LITE PG RECESSED
 LITE DPL CEILING / RECESSED
 LITE DPL RECESSED

LITE PG CEILING
 LITE DPL CEILING
 ACCESSORIES



/ 3 4 6



LITE PG CEILING / RECESSED



OPTIC

Methacrylate plate painted outside opacified + antistatic treatment for "soft" diffusing light emission with UGR<22.

IP 40 A*

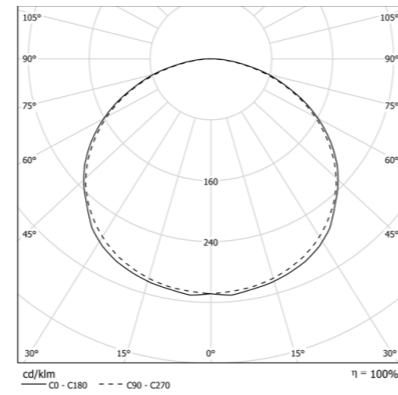

* For ceiling installation or recessed installation on false ceiling with visible structure.


COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm	mm
47PG38L4	38W 4000K	4416	596x596
47PG56L4HF	56W 4000K	6048	596x596

3 0 0 0 K

COD		lm	mm
47PG38L3	38W 3000K	3979	596x596
47PG56L3HF	56W 3000K	5832	596x596



LITE

3 4 7 /



LITE DPL CEILING / RECESSED



OPTIC

Diffuser in DPL (Diamond Prism LED) technology with UGR<19 for projects with display screen equipment.

IP 40 A*

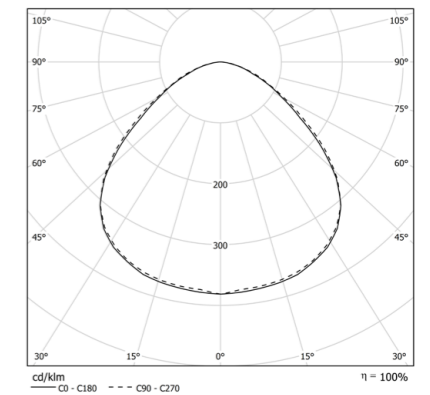

* For ceiling installation or recessed installation on false ceiling with visible structure.

COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm	mm
47DPL38L4	38W 4000K	4019	596x596
47DPL56L4HF	56W 4000K	5504	596x596

3 0 0 0 K

COD		lm	mm
47DPL38L3	38W 3000K	3873	596x596
47DPL56L3HF	56W 3000K	5307	596x596




/ 3 4 8


LITE PG RECESSED

OPTIC

Methacrylate plate painted outside opacified + antistatic treatment for "soft" diffusing light emission with UGR<22.

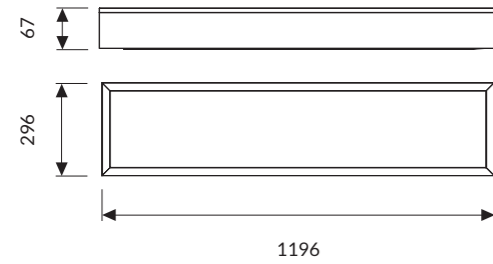

IP 40 A+

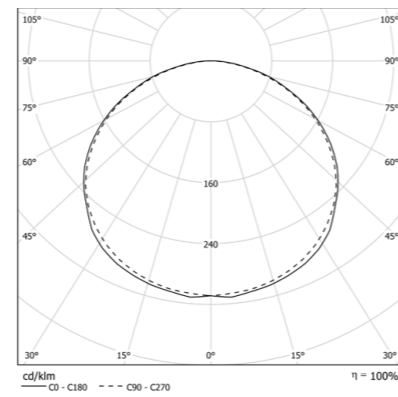

* For recessed installation on false ceiling with visible structure.


COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm	mm
47PG38L4M3V	38W 4000K	3532	296x1196
47PG56L4HFM3V	56W 4000K	4838	296x1196

3 0 0 0 K

COD		lm	mm
47PG38L3M3V	38W 3000K	3404	296x1196
47PG56L3HFM3V	56W 3000K	4665	296x1196




LITE

3 4 9 /


LITE DPL RECESSED

OPTIC

Diffuser in DPL (Diamond Prism LED) technology with UGR<19 for projects with display screen equipment.

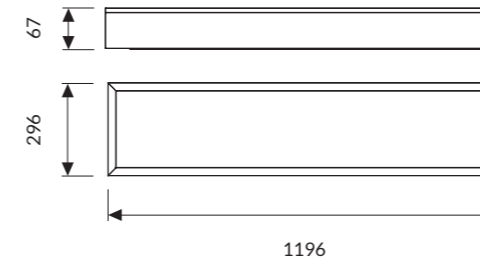

IP 40 A+

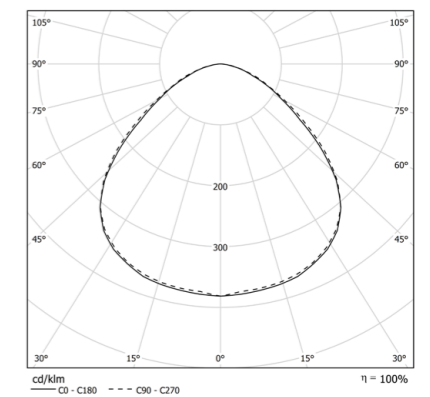

* For recessed installation on false ceiling with visible structure.

COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm	mm
47DPL38L4M3V	38W 4000K	3214	296x1196
47DPL56L4HFM3V	56W 4000K	4403	296x1196

3 0 0 0 K

COD		lm	mm
47PG38L3M3V	38W 3000K	3098	296x1196
47DPL56L3HFM3V	56W 3000K	4245	296x1196



/ 3 5 0



LITE PG CEILING



OPTIC

Methacrylate plate painted outside opacified + antistatic treatment for "soft" diffusing light emission with UGR<22.

IP 40 A+

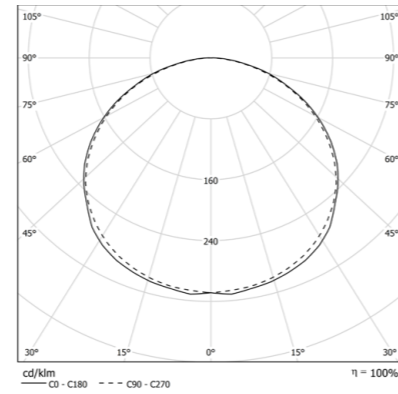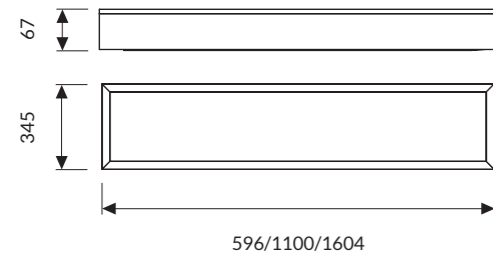

* For ceiling installation.


COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
47PG19L4M3	19W 4000K	2204	345x596
47PG28L4HFM3	28W 4000K	3024	345x596
47PG38L4M3	38W 4000K	4408	345x1100
47PG56L4HFM3	56W 4000K	6048	345x1100
47PG57L4M3	57W 4000K	6612	345x1604
47PG84L4HFM3	84W 4000K	9072	345x1604

3 0 0 0 K

COD	💡	lm	mm
47PG19L3M3	19W 3000K	2128	345x596
47PG28L3HFM3	28W 3000K	2912	345x596
47PG38L3M3	38W 3000K	4256	345x1100
47PG56L3HFM3	56W 3000K	5824	345x1100
47PG57L3M3	57W 3000K	6384	345x1604
47PG84L3HFM3	84W 3000K	8736	345x1604



LITE

3 5 1 /



LITE DPL CEILING



OPTIC

Diffuser in DPL (Diamond Prism LED) technology with UGR<19 for projects with display screen equipment.

IP 40 A+

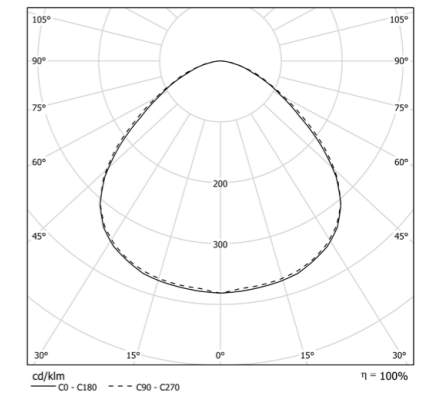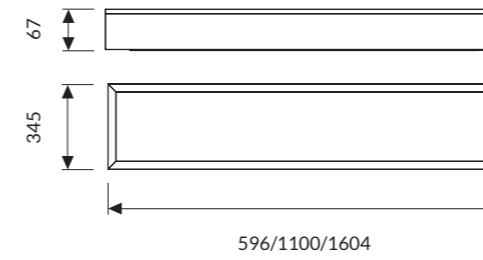

* For ceiling installation.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
47DPL19L4M3	19W 4000K	2006	345x596
47DPL28L4HFM3	28W 4000K	2752	345x596
47DPL38L4M3	38W 4000K	4011	345x1100
47DPL56L4HFM3	56W 4000K	5504	345x1100
47DPL57L4M3	57W 4000K	6017	345x1604
47DPL84L4HFM3	84W 4000K	8256	345x1604

3 0 0 0 K

COD	💡	lm	mm
47DPL19L3M3	19W 3000K	1936	345x596
47DPL28L3HFM3	28W 3000K	2650	345x596
47DPL38L3M3	38W 3000K	3873	345x1100
47DPL56L3HFM3	56W 3000K	5300	345x1100
47DPL57L3M3	57W 3000K	5809	345x1604
47DPL84L3HFM3	84W 3000K	7950	345x1604

ACCESSORIES



47AA13: 1500mm
47AA1330: 3000mm

Single wire 1500mm / 3000mm long adjustable suspension kit.



47AA16: 3 poles
47AA165P: 5 poles

Ceiling rose power. Cable length 2000mm.