



/ 3 5 2

LOGIC

3 5 3 /

LOGIC

Design Serge & Robert Cornelissen




η >70 lm/W

CRI >80

IP 44

UGR <22

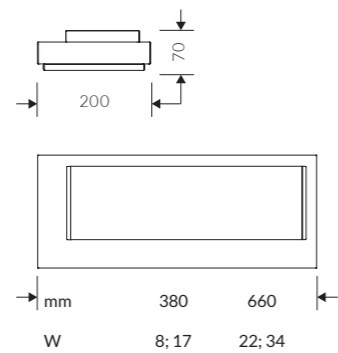



LOGIC

The elegance shallow profile coupled with the offset IP44 sealed PMMA diffuser makes LOGIC perfect for a wide range of contemporary applications.

Its avant-garde technology, enclosed in a modern and slimline design, allows an enlightening power higher than common standards, excellent energy efficiency and energy saving.

SPECIFICATIONS

- Colour temperature: 3000K/4000K
- CRI > 80
- McAdams 3
- Life Time: L80/B50 > 50.000h
- 5 years complete warranty
- Eye safety: risk-free (RG 0) in accordance with EN62471:2009

OPTICS

PMMA diffuser for soft emission. Internal aluminum flux regenerator.

BODY

The body is 8/10 thick, completely realized from steel plate with epoxy powders.

LEGAL REFERENCES

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

CERTIFICATIONS

CE IP44
ErP Class: A⁺⁺

COLOURS

White RAL 9016 - Code: B
Stratos gray RAL 9022 - Code: C24
Black RAL 9005 - Code: C8

ON REQUEST

- Wiring DALI dimmable - Code: RDD (verify the version available)
- Wiring with emergency kit - Code: EM for 1 hour / EM3H for 3 hours (verify the version available)
- Driver Bluetooth - Code: BT

VERSIONS

LOGIC LED PG



/ 3 5 6



LOGIC LED PG




OPTIC

PMMA satin diffuser and integrated LED technology for optimum efficiency and longevity.

IP 44 **A++**

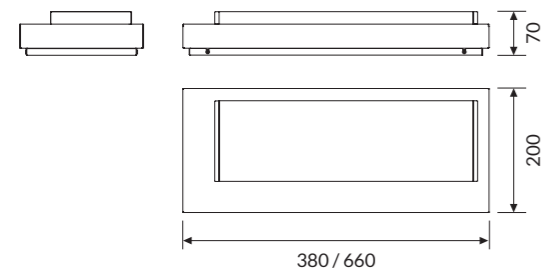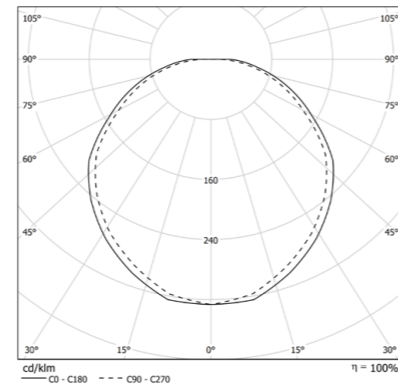

TECHNICAL NOTE

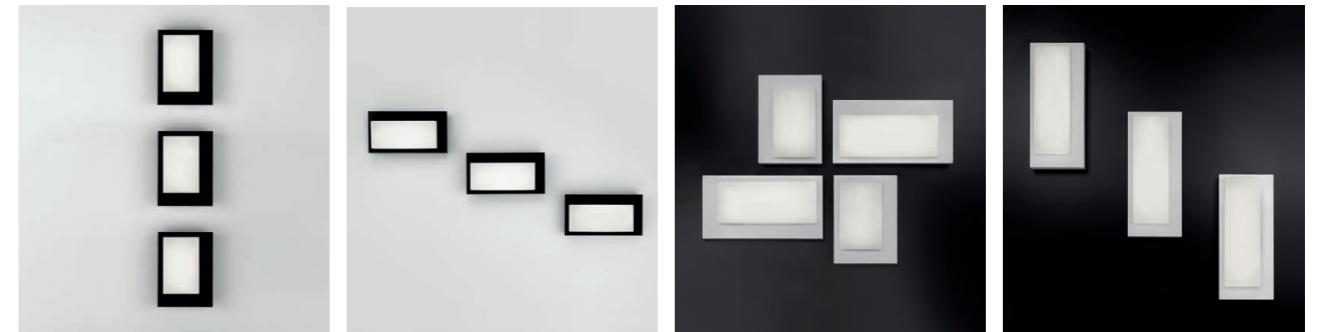

COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm	mm
09PG8L4	8W 4000K	1032	380
09PG17L4	17W 4000K	1904	380
09PG22L4	22W 4000K	2064	660
09PG34L4	34W 4000K	3808	660

3 0 0 0 K

COD		lm	mm
09PG8L3	8W 3000K	928	380
09PG17L3	17W 3000K	1714	380
09PG22L3	22W 3000K	1857	660
09PG34L3	34W 3000K	3428	660