LUDO LINEAR DK

ID 20





LUDO LINEAR DK

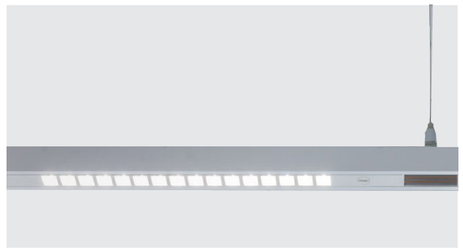

CE D **RETILAP**

5 YEARS WARRANTY

III

IP 40

-20° +35°

CRI>90

MacAdam 3

RG0/RG1

L90/B10 50.000h

DALI standard

48 V

Body

Polycarbonate

LUDO LINEAR DK



High-contrast polycarbonate microcell diffuser UGR<16.

Beam angle: 60°.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
20DK10K460D	815	20DK10K360D	750	10W 60°	380

TECHNICAL NOTES

FIXING SYSTEM AND POWER SUPPLY







Low voltage track



Quick application on track



CE D **RETILAP**

5 YEARS WARRANTY

III

IP 40

-20° +35°

CRI>90

MacAdam 3

RG0/RG1

L90/B10 50.000h

DALI standard

48 V

On req.:

DALI CODE — D

BT

CODE K27 2700K

CODE DIMTDS SWITCHDIM

Body

Polycarbonate

Colours

COD.B

COD.C8