











FEATURES

-  Direct emission
-  UGR <16
-  IP40

LED

-  3000K/4000K
-  >96 lm/W
-  CRI >90
-  Eye safety: R60/R61
-  Mac Adams 3
-  L80/B10 >50.000h
-  DALI standard*

CERTIFICATIONS

-  EEA Conformity
-  Energy efficiency
-  5 years warranty

ON REQUEST

-  2700K - code K27*

SPECIFICATIONS

48V DC operation.
DALI standard.
High Contrast UGR <16
PC microlenses diffuser.

BODY

Polycarbonate.

COLORS

White RAL 9003 - code B
Black RAL 9005 - code C8

RELATED PRODUCTS

LV Track (P. 184)



LUDO LINEAR DK is a linear lighting element with **High Contrast microcell optics** and high glare control. **Operating at 48V for Low Voltage tracks**, it is a winning solution that stands out for its minimalism and essentiality in forms, functionality and technical performance.

ID 20




*Where available
For SWITCHDIM command use DIMTDS (pg. 337)

LUDO LINEAR DK

IP 40

High Contrast diffuser UGR <16 with PC lens.
Beam angle: 60°.



Cod. 4000K	☼	lm	L mm
20DK10K460D	10W 60°	815	380

Cod. 3000K	☼	lm	L mm
20DK10K360D	10W 60°	750	380



TECHNICAL NOTES



FIXING SYSTEM AND POWER SUPPLY



Low voltage track

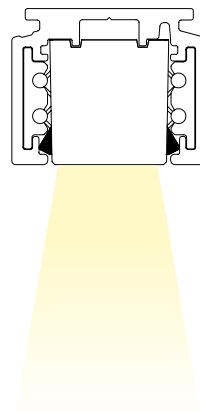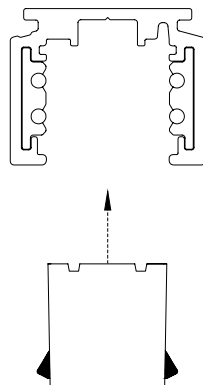

Quick application
on track