



/ 3 6 4

LUDO LINEAR

3 6 5 /

# LUDO LINEAR

Design ESSE-CI





**η** >96 lm/W

**CRI** >90

**IP** 40

**UGR** <22

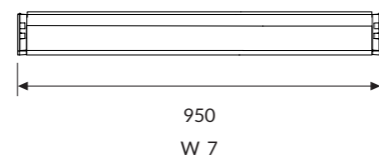



# LUDO LINEAR

LUDO LINEAR is a linear luminous fixture suitable on both LV tracks (page 370) and Ghostfeed cable system (page 172), also for indirect lighting. The quick fixing system, with the CRI>90 LEDs and the fully homogeneous diffuser, make it extremely versatile both in the retail world and in contemporary civil spaces.

## SPECIFICATIONS

- Operating at 48V DC
- Colour temperature: 3000K/4000K
- CRI>90
- McAdams 3
- Life Time: L80/B50 >50.000h
- 5 years complete warranty
- Eye safety: risk-free (RG 0) in accordance with EN62471:2009

## OPTICS

Frosted PMMA diffuser.

## BODY

Manufactured from extruded anodized aluminium.

## LEGAL REFERENCES

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

## CERTIFICATIONS

CE IP40  
ErP Class: A\*\*



## ON REQUEST

- Wiring DALI dimmable - Code: RDD (verify the version available)


## VERSIONS

LUDO LINEAR PG PREMIUM



/ 3 6 8



# LUDO LINEAR PG Premium CRI > 90

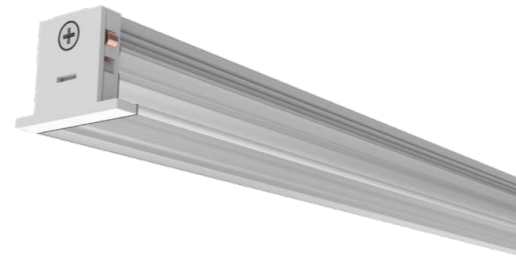

## OPTIC


PG frosted diffuser extruded PMMA for soft diffusion with UGR < 22.

IP40 A++

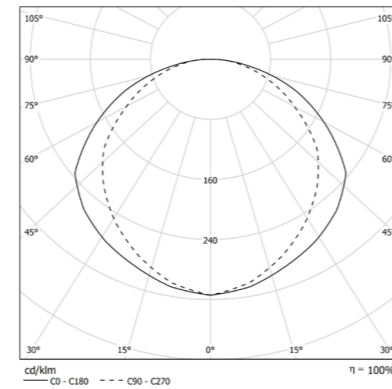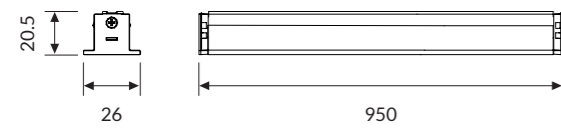

## TECHNICAL NOTE

### MAGNETIC FIXING SYSTEM AND POWER SUPPLY

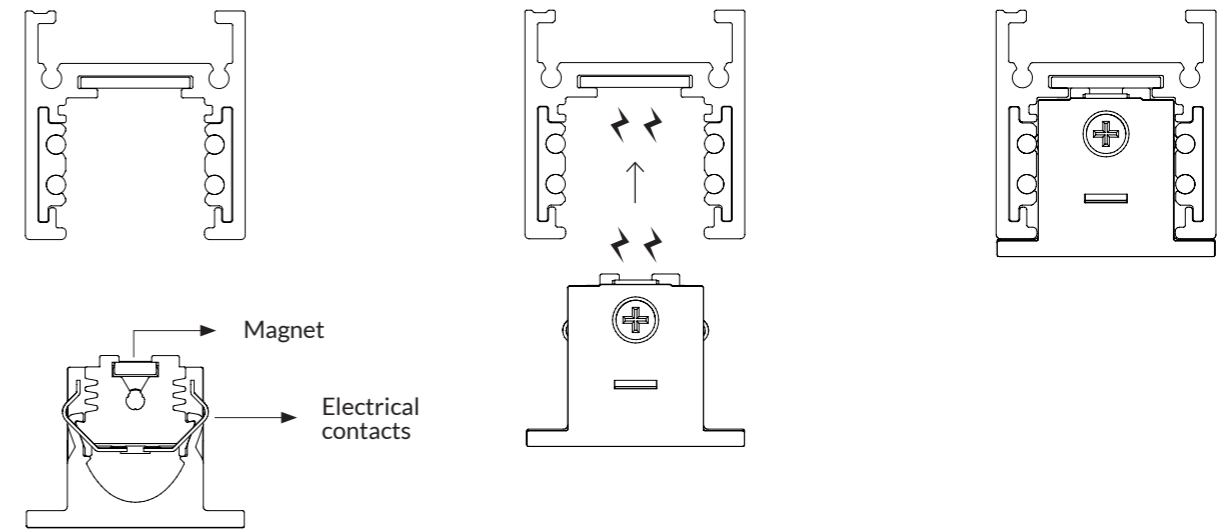

## COLOUR TEMPERATURE //

### 4 0 0 0 K

| COD       |          | lm  |
|-----------|----------|-----|
| 20PG7L490 | 7W 4000K | 672 |

### 3 0 0 0 K

| COD       |          | lm  |
|-----------|----------|-----|
| 20PG7L390 | 7W 3000K | 598 |