

## LITE

ID CODE: 47




Commercial fixture with **highly efficient design and slim, compact profile** for ceiling, suspended and installation applications. Features an integrated power supply. Closed optical system, sealed to IP40, protects against dust and accidental damage during installation.

**High efficiency LED modules** with integrated diffusing optic, guaranteeing **extraordinary light homogeneity** without compromising efficiency.









Design  
esse-ci

## FEATURES

-  Direct Emission
-  UGR <19; <22
-  IP 40






## LED

-  3000K/4000K
-  >107 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

## CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

## ON REQUEST


-  DALI - RDD code (verify the version)
-  BT Easy connect - BEM/BES code
-  Emergency kit 1/3 hour EM/EM 3h code
-  5000K
-  False ceiling structure 625x625mm

**Specifications** · Built-in driver

**Optic** · DPL technology for controlled UGR<19  
· PG diffuser for diffused emission with UGR<22

**Body** Extruded aluminum body with epoxy powder coating.

**Colour** ○ Matt white RAL 9003 - Code: B

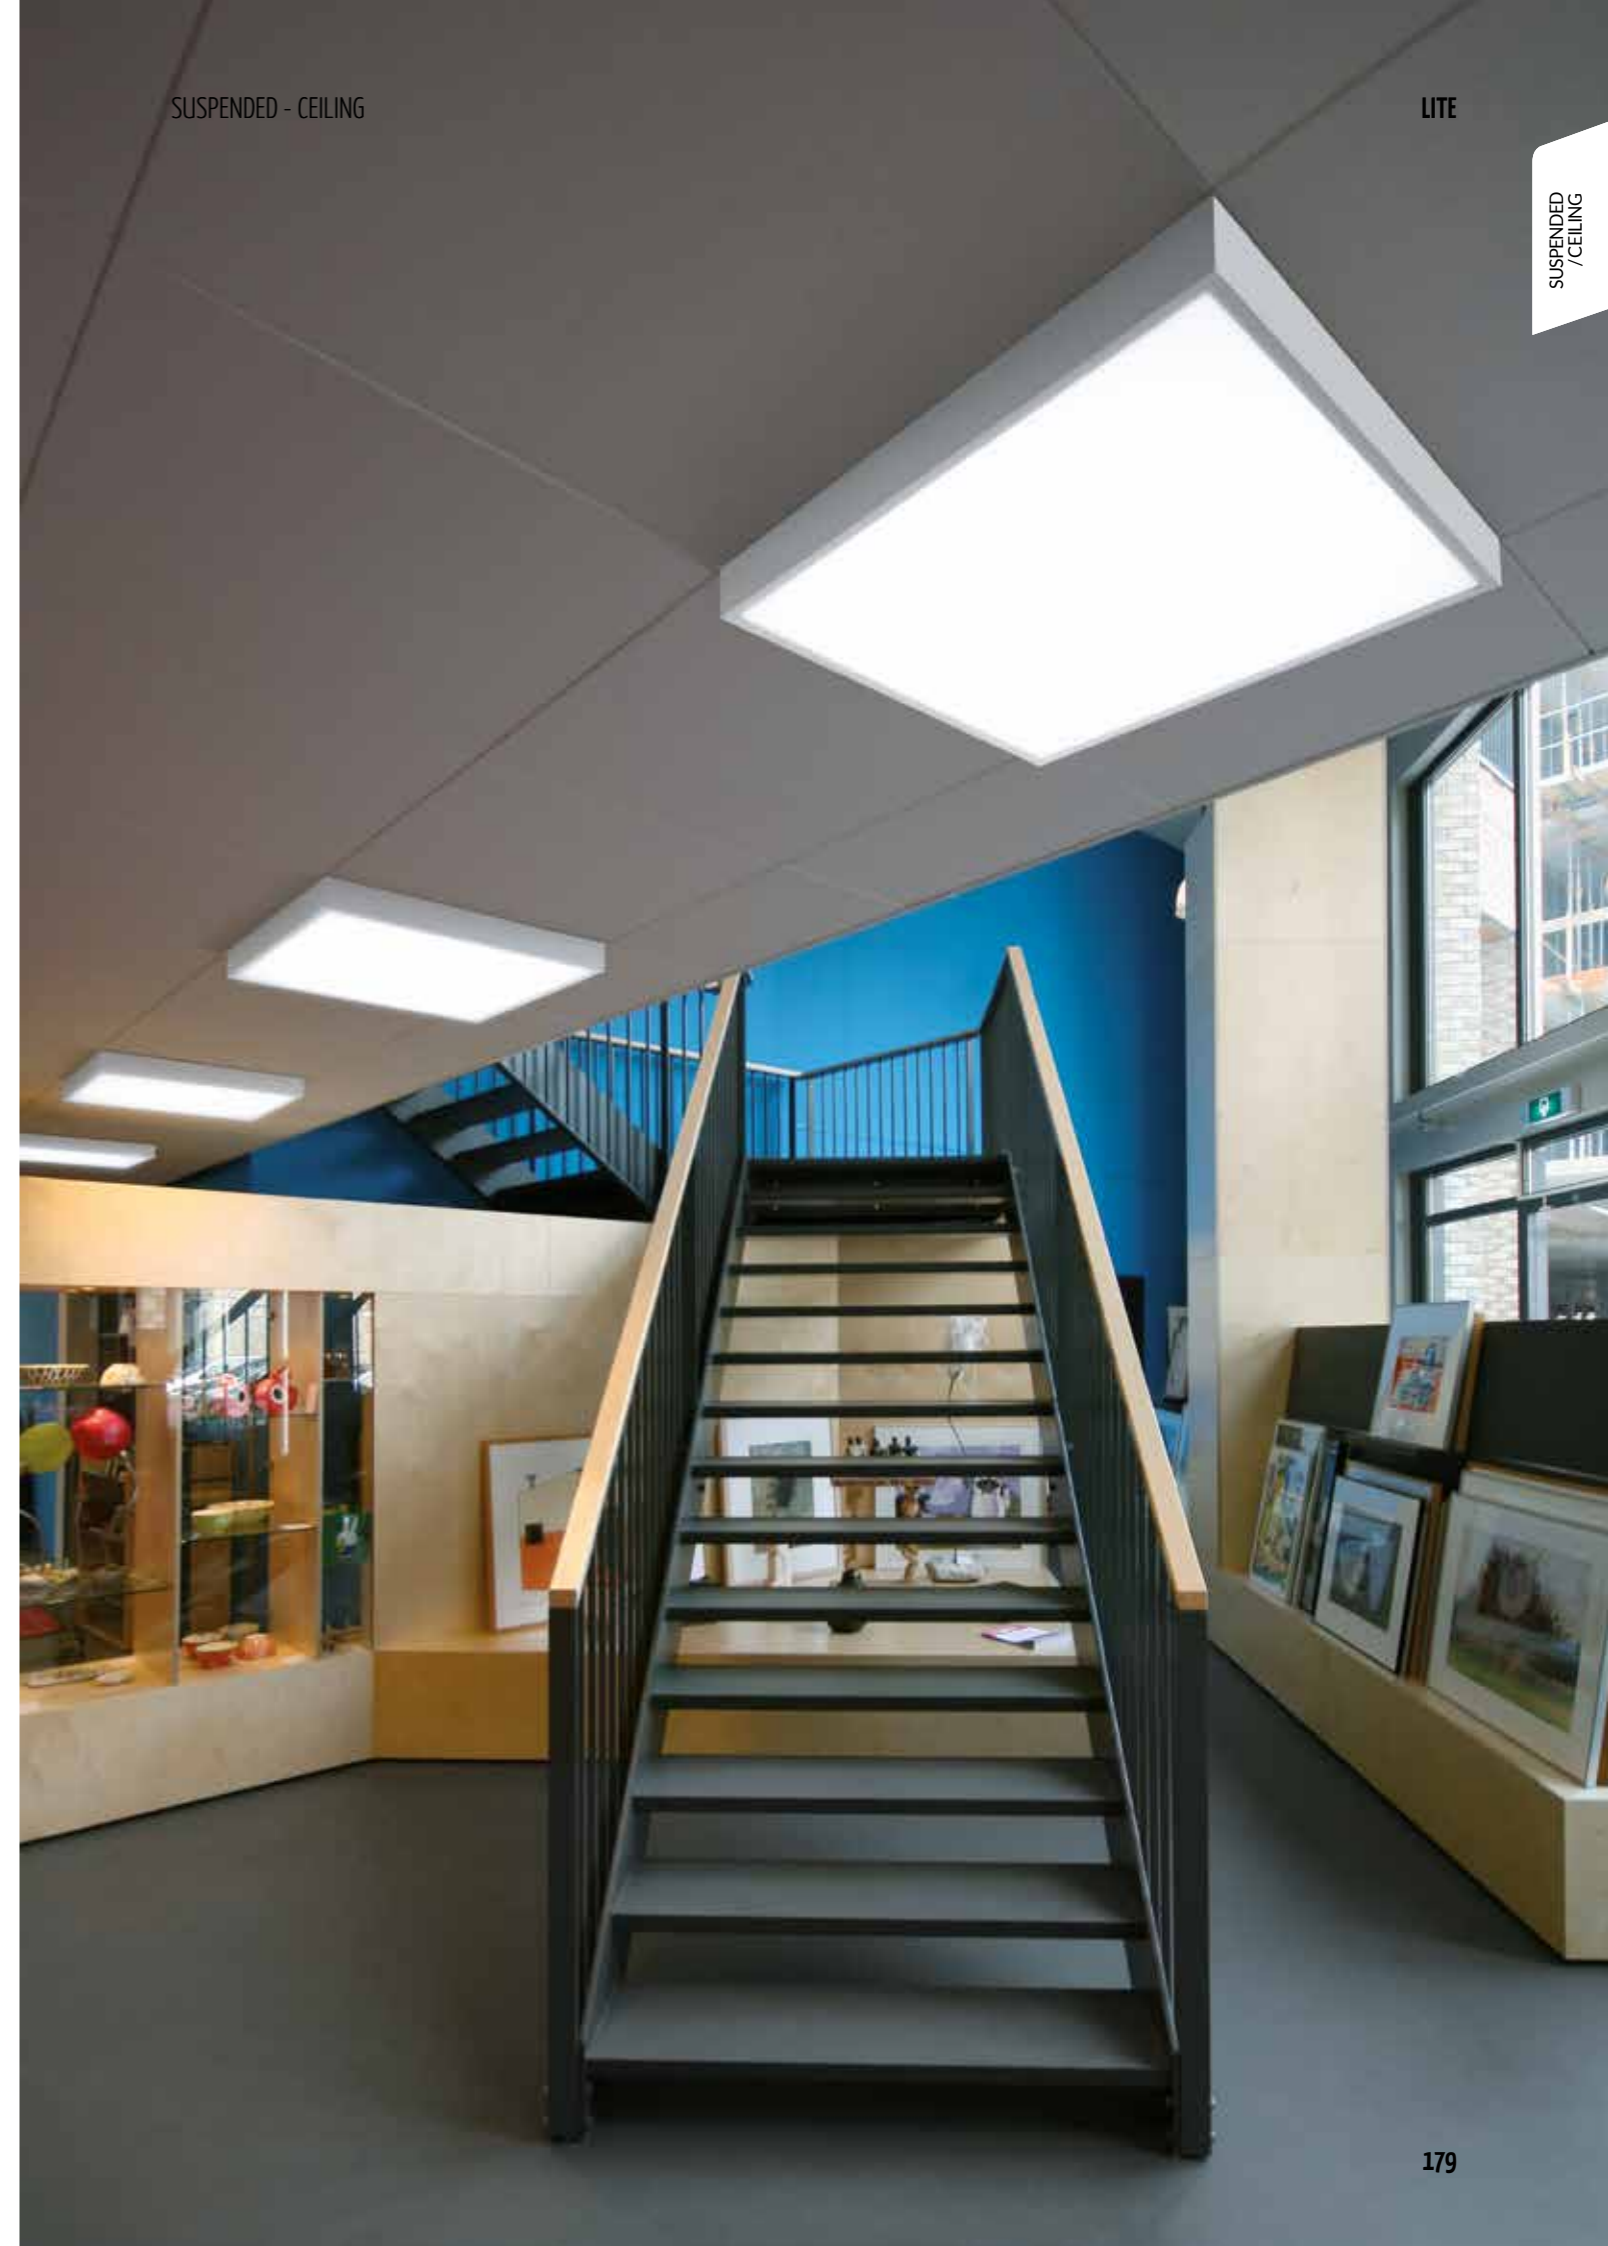


## LITE DPL CEILING


### OPTIC

Diffuser in DPL (Diamond Prism LED) technology with UGR<19 for projects with display screen equipment.

For ceiling installation on false ceiling with visible structure.



IP 40 A+

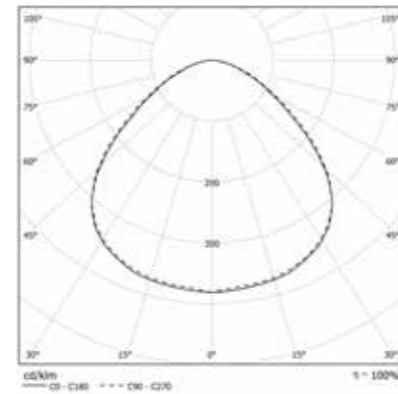

## LITE PG CEILING


### OPTIC

Methacrylate plate painted outside opacified + antistatic treatment for "soft" diffusing light emission with UGR<22.

For ceiling installation on false ceiling with visible structure.



IP 40 A+

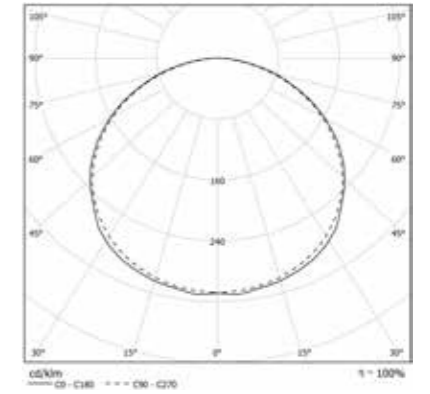

### COLOUR TEMPERATURE

4000K

3000K

COD	💡	lm	mm
47DPL38L490	38W	3738	596x596
47DPL56L490HF	56W	5119	596x596

COD	💡	lm	mm
47DPL38L390	38W	3551	596x596
47DPL56L390HF	56W	4863	596x596

### COLOUR TEMPERATURE

4000K

3000K

COD	💡	lm	mm
47PG38L490	38W	4107	596x596
47PG56L490HF	56W	5624	596x596


COD	💡	lm	mm
47PG38L390	38W	3902	596x596
47PG56L390HF	56W	5343	596x596

## LITE DPL LONG CEILING


### OPTIC

Diffuser in DPL (Diamond Prism LED) technology with UGR<19 for projects with display screen equipment.

For ceiling installation.

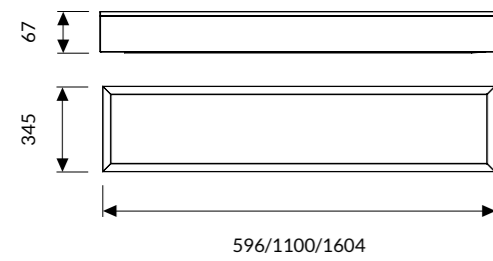

IP 40 A+

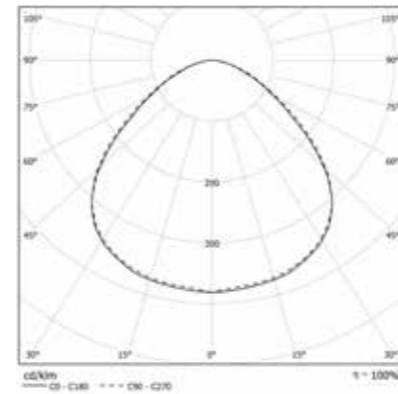

### COLOUR TEMPERATURE

4000K

3000K

COD	💡	lm	mm
47DPL19L490M3	19W	1866	345x596
47DPL28L490HFM3	28W	2559	345x596
47DPL38L490M3	38W	3738	345x1100
47DPL56L490HFM3	56W	5119	345x1100
47DPL57L490M3	57W	5596	345x1604
47DPL84L490HFM3	84W	7678	345x1604


COD	💡	lm	mm
47DPL19L390M3	19W	1773	345x596
47DPL28L390HFM3	28W	2431	345x596
47DPL38L390M3	38W	3551	345x1100
47DPL56L390HFM3	56W	4863	345x1100
47DPL57L390M3	57W	5316	345x1604
47DPL84L390HFM3	84W	7294	345x1604

## LITE PG LONG CEILING


### OPTIC

Methacrylate plate painted outside opacified + antistatic treatment for "soft" diffusing light emission with UGR<22.

For ceiling installation.

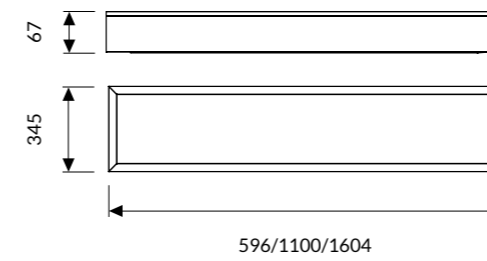

IP 40 A+

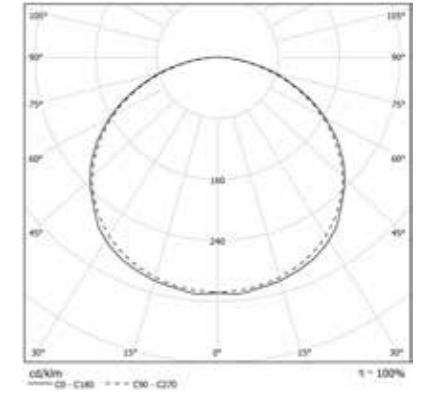

### COLOUR TEMPERATURE

4000K

3000K

COD	💡	lm	mm
47PG19L490M3	19W	2050	345x596
47PG28L490HFM3	28W	2812	345x596
47PG38L490M3	38W	4107	345x1100
47PG56L490HFM3	56W	5624	345x1100
47PG57L490M3	57W	6149	345x1604
47PG84L490HFM3	84W	8437	345x1604

COD	💡	lm	mm
47PG19L390M3	19W	1948	345x596
47PG28L390HFM3	28W	2671	345x596
47PG38L390M3	38W	3902	345x1100
47PG56L390HFM3	56W	5343	345x1100
47PG57L390M3	57W	5842	345x1604
47PG84L390HFM3	84W	8015	345x1604

## Accessories



**47AA13:** 1500mm  
**47AA1330:** 3000mm

Single wire 1500mm / 3000mm long adjustable suspension kit.



**00AA16:** 3 poles  
**00AA165P:** 5 poles

Ceiling rose power, cable length 2000mm.

# LITE

ID CODE: 47

Commercial fixture with **highly efficient design and slim, compact profile** also for recessed applications. Features an integrated power supply. **Closed optical system, sealed to IP40, protects against dust and accidental damage** during installation.

High efficiency LED modules with integrated diffusing optic, guaranteeing extraordinary light homogeneity without compromising efficiency.

See also:




LITE suspended/ceiling

p. 178









Design  
esse-ci

## FEATURES

-  Direct Emission
-  UGR <19; <22
-  IP 40






## LED

-  3000K/4000K
-  >107 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

## CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

## ON REQUEST


-  DALI - RDD code (verify the version)
-  BT Easy connect - BEM/BES code
-  Emergency kit 1/3 hour EM/EM 3h code
-  5000K
-  False ceiling structure 625x625mm

**Specifications** Built-in driver.

**Optic** · DPL technology for controlled UGR<19  
· PG diffuser for diffused emission with UGR<22

**Body** Extruded aluminum body with epoxy powder coating.

**Colour** ○ Matt white RAL 9003 - Code: B

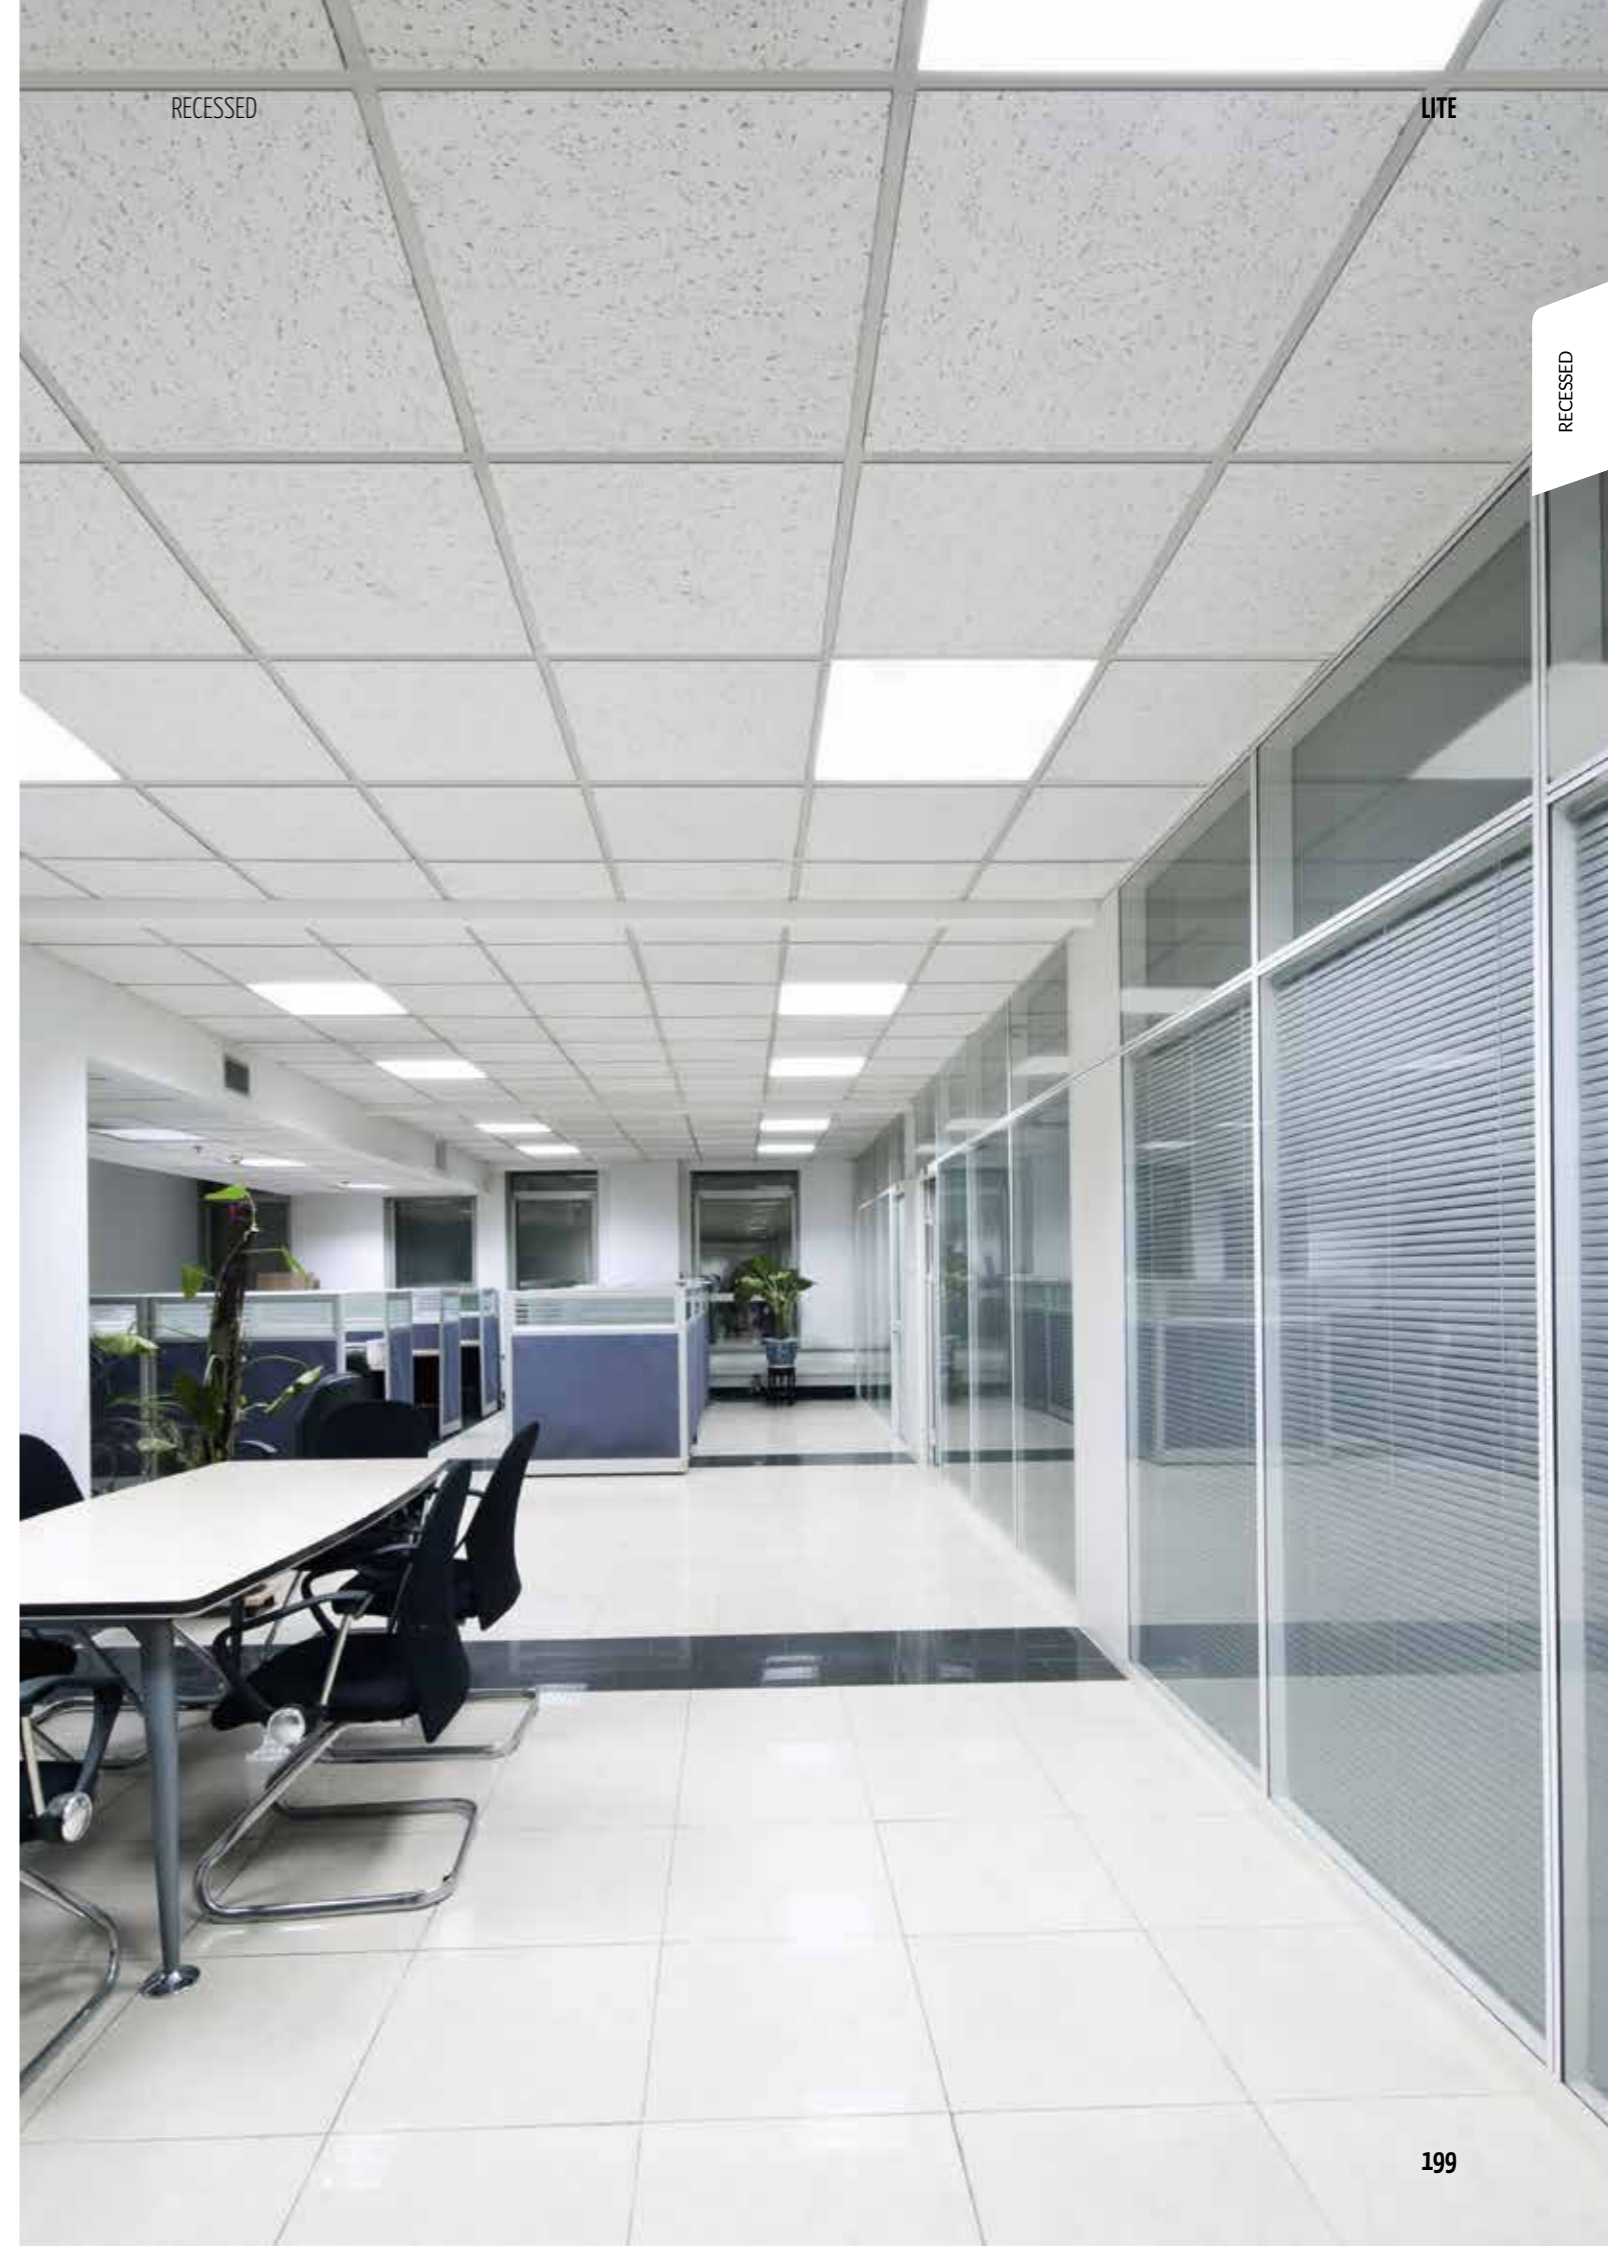

RECESSED

LITE


RECESSED

### LITE DPL RECESSED


**OPTIC**

Diffuser in DPL (Diamond Prism LED) technology with UGR<19 for projects with display screen equipment.

*For recessed installation on false ceiling with visible structure.*



IP 40 A+

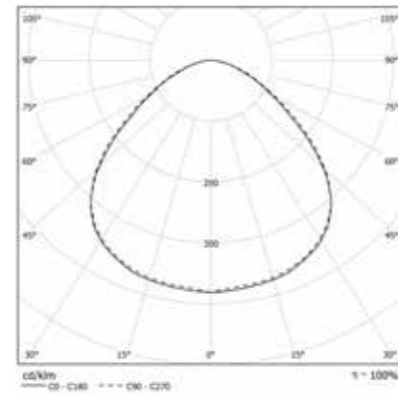

**COLOUR TEMPERATURE 4000K**


COD	💡	lm	mm
47DPL38L490	38W	3738	596x596
47DPL56L490HF	56W	5119	596x596

### LITE PG RECESSED


**OPTIC**

Methacrylate plate painted outside opacified + antistatic treatment for "soft" diffusing light emission with UGR<22.

*For recessed installation on false ceiling with visible structure.*



IP 40 A+

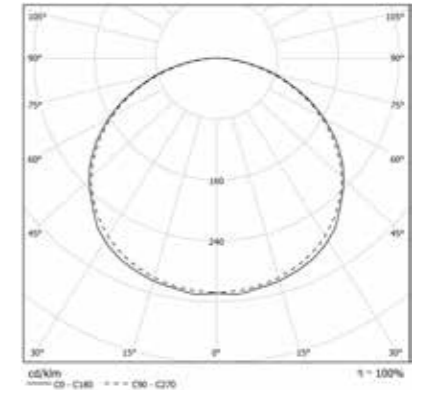

**COLOUR TEMPERATURE 4000K**

COD	💡	lm	mm
47PG38L490	38W	4107	596x596
47PG56L490HF	56W	5624	596x596

**COLOUR TEMPERATURE 3000K**


COD	💡	lm	mm
47PG38L390	38W	3902	596x596
47PG56L390HF	56W	5343	596x596

### LITE DPL LONG RECESSED


**OPTIC**

Diffuser in DPL (Diamond Prism LED) technology with UGR<19 for projects with display screen equipment.

*For recessed installation on false ceiling with visible structure.*

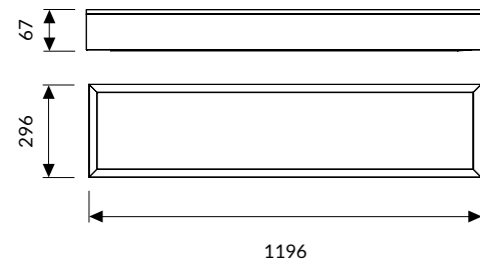

IP 40 A+

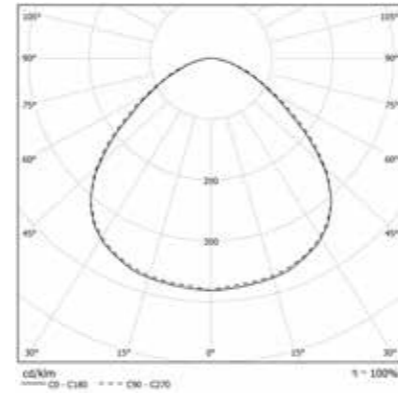

**COLOUR TEMPERATURE** 4000K


COD	💡	lm	mm
47DPL38L490M3V	38W	2989	296x1196
47DPL56L490HFM3V	56W	4095	296x1196

### LITE PG LONG RECESSED


**OPTIC**

Methacrylate plate painted outside opacified + antistatic treatment for "soft" diffusing light emission with UGR<22.

*For recessed installation on false ceiling with visible structure..*

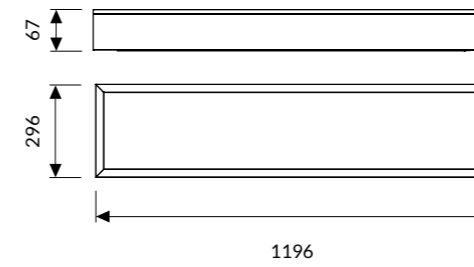

IP 40 A+

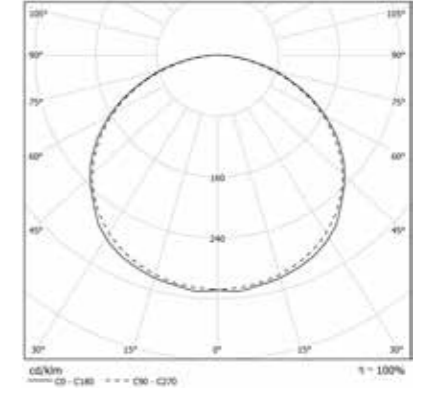

**COLOUR TEMPERATURE** 4000K

COD	💡	lm	mm
47PG38L490M3V	38W	3285	296x1196
47PG56L490HFM3V	56W	4499	296x1196

**COLOUR TEMPERATURE** 3000K

COD	💡	lm	mm
47PG38L390M3V	38W	3166	296x1196
47PG56L390HFM3V	56W	4338	296x1196

RECESSED