

LOGIC

ID CODE: 09




The **elegance shallow profile** coupled with the offset IP44 sealed PMMA diffuser makes LOGIC **perfect for a wide range of contemporary applications**.

The latest LED technology is utilised along with integrated drivers to facilitate multiple outputs. Housed in a **modern and slimline design**, LOGIC achieves excellent energy efficiency whilst promoting a contemporary, fresh aesthetic.









Design
esse-ci

FEATURES

-  Direct Emission
-  UGR <22
-  IP 44

LED

-  3000K/4000K
-  >120 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A++
-  5 years warranty

ON REQUEST

-  DALI - RDD code (verify the version)
-  Emergency kit 1/3 hour EM/EM 3h code

Specifications Built-in driver.

Optic PMMA diffuser for soft emission. Internal aluminum flux regenerator.

Body The body is 8/10 thick, completely realized from steel plate with epoxy powders.

Colour


- White RAL 9016 - Code: B
- Black RAL 9005 - Code: C8




LOGIC LED PG

OPTIC

PMMA satin diffuser and integrated LED technology for optimum efficiency and longevity.

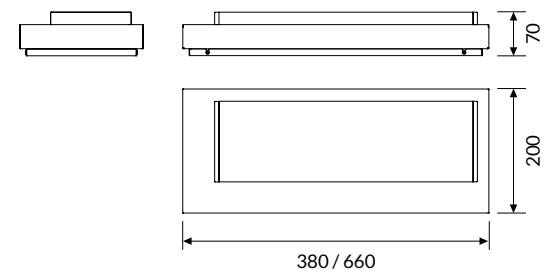


IP 44 **A++**

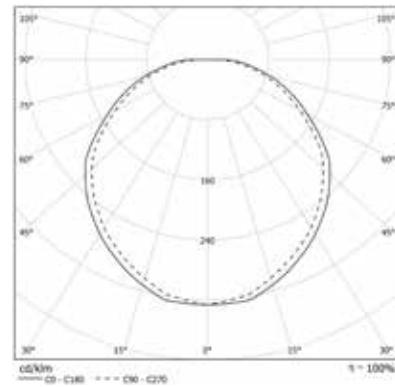

Technical Note

EXAMPLES OF COMPOSITION

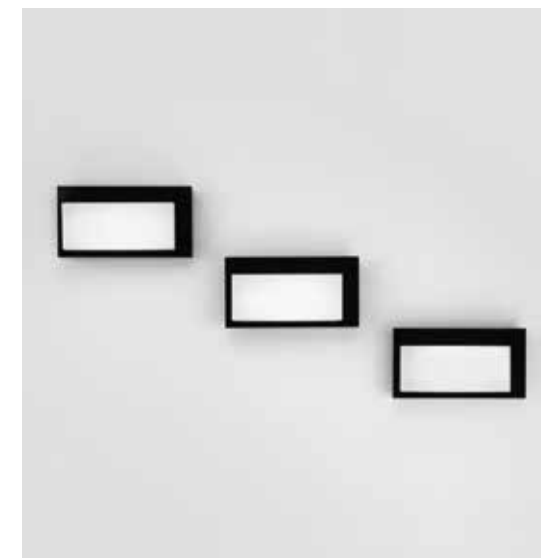

COLOUR TEMPERATURE

4000K

COD	💡	lm	mm
09PG8L490	8W	1032	380
09PG17L490	17W	1904	380
09PG22L490	22W	2064	660
09PG34L490	34W	3808	660

3000K

COD	💡	lm	mm
09PG8L390	8W	928	380
09PG17L390	17W	1714	380
09PG22L390	22W	1857	660
09PG34L390	34W	3428	660