



LUDO LINEAR PG

OPTIC

PG frosted diffuser extruded PMMA for soft diffusion with UGR<22.

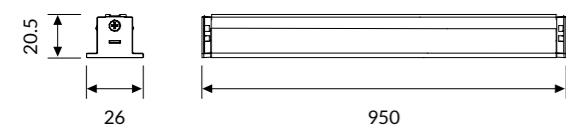

IP 40 A++

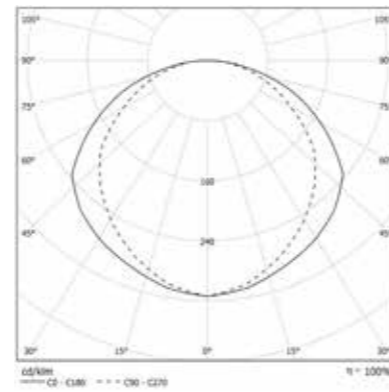

Technical Note

FIXING SYSTEM AND POWER SUPPLY



LOW VOLTAGE

COLOUR TEMPERATURE

4000K

3000K

COD	Icon	lm
20PG7L490	7W	672

COD	Icon	lm
20PG7L390	7W	598