MAKE

ID 39





MAKE



MAKE FL



MAKE DOUBLE



MAKE DEEP



CE C RETILAP

5 YEARS WARRANTY

IP 44 CRI>90 Mac Adams 3

IK 02 RG0/RG1 L90/B10 50.000h

-20° +35°

Body

Epoxy
powder coated
aluminium




MAKE DEEP PRO



MAKE DEEP PRO FL



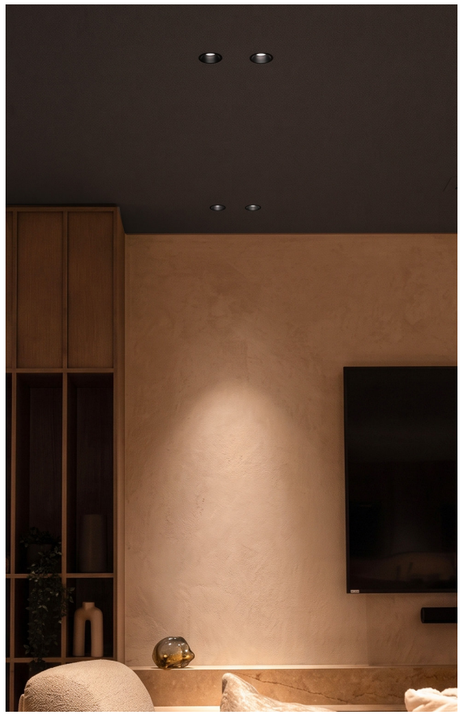

The MAKE DEEP PRO is characterised by a tool-free, modular access architecture without the need for screws or complex locking mechanisms. Simply applying vertical pressure followed by an anti-clockwise rotation grants access to the internal module.

This movement unlocks the central body, releasing it outwards and ensuring rapid technical replacement procedures.



CE C RETILAP

5 YEARS WARRANTY

IP 44 CRI>90 Mac Adams 3

IK 02 RG0/RG1 L90/B10 50.000h

-20° +35°

Body


Epoxy
powder coated
aluminium

MAKE / MICRO

Adjustable recessed installation.

Polycarbonate lens ø 25mm. Beam angles: 15°-24°-36°-50°.





Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39OR3K415	286	39OR3K315	273	3W 15°	60
39OR3K424	286	39OR3K324	273	3W 24°	60
39OR3K436	286	39OR3K336	273	3W 36°	60
39OR3K450	286	39OR3K350	273	3W 50°	60
39OR6K415	531	39OR6K315	521	6W 15°	60
39OR6K424	531	39OR6K324	521	6W 24°	60
39OR6K436	531	39OR6K336	521	6W 36°	60
39OR6K450	531	39OR6K350	521	6W 50°	60
39OR9K415	793	39OR9K315	752	9W 15°	60
39OR9K424	793	39OR9K324	752	9W 24°	60
39OR9K436	793	39OR9K336	752	9W 36°	60
39OR9K450	793	39OR9K350	752	9W 50°	60

MAKE / MINI

Adjustable recessed installation.

Polycarbonate lens ø 35mm. Beam angles: 15°-24°-36°-50°.





Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39OR3K415MN	343	39OR3K315MN	327	3W 15°	78
39OR3K424MN	343	39OR3K324MN	327	3W 24°	78
39OR3K436MN	343	39OR3K336MN	327	3W 36°	78
39OR3K450MN	343	39OR3K350MN	327	3W 50°	78
39OR6K415MN	661	39OR6K315MN	630	6W 15°	78
39OR6K424MN	661	39OR6K324MN	630	6W 24°	78
39OR6K436MN	661	39OR6K336MN	630	6W 36°	78
39OR6K450MN	661	39OR6K350MN	630	6W 50°	78
39OR11K415MN	897	39OR11K315MN	852	11W 15°	78
39OR11K424MN	897	39OR11K324MN	852	11W 24°	78
39OR11K436MN	897	39OR11K336MN	852	11W 36°	78
39OR11K450MN	897	39OR11K350MN	852	11W 50°	78

CE C RETILAP — 5 YEARS WARRANTY

IP 44 — IK 02 — CRI>90 — RG0/RG1 — Mac Adams 3 — L90/B10 50.000h

-20° +35°

On req.: DALI CODE — D — BT — 1 h EM — 1h DEM — 3 h EM — DEM — EM3H — CODE K27 2700K — CODE K5 5000K

Body

Epoxy powder coated aluminium

Colours


COD.W — COD.BK — ON REQ.

MAKE / SMALL

Adjustable recessed installation.

Polycarbonate lens ø 50mm. Beam angles: 15°-24°-36°-50°.





Reflector in matching finish included.
Additional colour options available as accessories.


CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39OR9K415S	935	39OR9K315S	919	9W 15°	92
39OR9K424S	935	39OR9K324S	919	9W 24°	92
39OR9K436S	935	39OR9K336S	919	9W 36°	92
39OR9K450S	935	39OR9K350S	919	9W 50°	92
39OR13K415S	1285	39OR13K315S	1263	13W 15°	92
39OR13K424S	1285	39OR13K324S	1263	13W 24°	92
39OR13K436S	1285	39OR13K336S	1263	13W 36°	92
39OR13K450S	1285	39OR13K350S	1263	13W 50°	92
39OR18K415S	1825	39OR18K315S	1795	18W 15°	92
39OR18K424S	1825	39OR18K324S	1795	18W 24°	92
39OR18K436S	1825	39OR18K336S	1795	18W 36°	92
39OR18K450S	1825	39OR18K350S	1795	18W 50°	92

MAKE / MEDIUM

Adjustable recessed installation.

Polycarbonate lens ø 75mm. Beam angles: 15°-24°-36°-50°-70°.





Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39OR18K415M	1944	39OR18K315M	1914	18W 15°	138
39OR18K424M	1944	39OR18K324M	1914	18W 24°	138
39OR18K436M	1944	39OR18K336M	1914	18W 36°	138
39OR18K450M	1944	39OR18K350M	1914	18W 50°	138
39OR18K470M	1944	39OR18K370M	1914	18W 70°	138
39OR27K415M	2610	39OR27K315M	2570	27W 15°	138
39OR27K424M	2610	39OR27K324M	2570	27W 24°	138
39OR27K436M	2610	39OR27K336M	2570	27W 36°	138
39OR27K450M	2610	39OR27K350M	2570	27W 50°	138
39OR27K470M	2610	39OR27K370M	2570	27W 70°	138
39OR36K415M	3497	39OR36K315M	3448	36W 15°	138
39OR36K424M	3497	39OR36K324M	3448	36W 24°	138
39OR36K436M	3497	39OR36K336M	3448	36W 36°	138
39OR36K450M	3497	39OR36K350M	3448	36W 50°	138
39OR36K470M	3497	39OR36K370M	3448	36W 70°	138

CE C RETILAP — 5 YEARS WARRANTY

IP 44 — IK 02 — CRI>90 — RG0/RG1 — Mac Adams 3 — L90/B10 50.000h

-20° +35°

On req.: DALI CODE — D — BT — 1 h EM — 1h DEM — 3 h EM — DEM — EM3H — CODE K27 2700K — CODE K5 5000K

Body

Epoxy powder coated aluminium

Colours

COD.W — COD.BK — ON REQ.

MAKE / LARGE

Adjustable recessed installation.

Polycarbonate lens ø 83mm. Beam angles: 15°-24°-36°-50°-70°.






Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39OR25K415L	2553	39OR25K315L	2515	25W 15°	165
39OR25K424L	2553	39OR25K324L	2515	25W 24°	165
39OR25K436L	2553	39OR25K336L	2515	25W 36°	165
39OR25K450L	2553	39OR25K350L	2515	25W 50°	165
39OR25K470L	2553	39OR25K370L	2515	25W 70°	165
39OR36K415L	3503	39OR36K315L	3402	36W 15°	165
39OR36K424L	3503	39OR36K324L	3402	36W 24°	165
39OR36K436L	3503	39OR36K336L	3402	36W 36°	165
39OR36K450L	3503	39OR36K350L	3402	36W 50°	165
39OR36K470L	3503	39OR36K370L	3402	36W 70°	165
39OR40K415L	4401	39OR40K315L	4353	40W 15°	165
39OR40K424L	4401	39OR40K324L	4353	40W 24°	165
39OR40K436L	4401	39OR40K336L	4353	40W 36°	165
39OR40K450L	4401	39OR40K350L	4353	40W 50°	165
39OR40K470L	4401	39OR40K370L	4353	40W 70°	165

MAKE / FL MINI

Recessed frameless installation with adjustable light source.

Polycarbonate lens ø 35mm. Beam angles: 15°-24°-36°-50°.





Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39FL3K415MN	343	39FL3K315MN	327	3W 15°	68
39FL3K424MN	343	39FL3K324MN	327	3W 24°	68
39FL3K436MN	343	39FL3K336MN	327	3W 36°	68
39FL3K450MN	343	39FL3K350MN	327	3W 50°	68
39FL6K415MN	661	39FL6K315MN	630	6W 15°	68
39FL6K424MN	661	39FL6K324MN	630	6W 24°	68
39FL6K436MN	661	39FL6K336MN	630	6W 36°	68
39FL6K450MN	661	39FL6K350MN	630	6W 50°	68
39FL11K415MN	897	39FL11K315MN	852	11W 15°	68
39FL11K424MN	897	39FL11K324MN	852	11W 24°	68
39FL11K436MN	897	39FL11K336MN	852	11W 36°	68
39FL11K450MN	897	39FL11K350MN	852	11W 50°	68

CE · C · RETILAP · 5 YEARS WARRANTY · IP 44 · IK 02 · -20° +35° · CRI>90 · Mac Adams 3 · RG0/RG1 · L90/B10 50.000h

On req.: DALI CODE — D · BT · 1 h EM · EM · 1h DEM · DEM · 3 h EM3H · EM3H · CODE K27 2700K · CODE K5 5000K

Body: Epoxy powder coated aluminium

Colours: COD.W · COD.BK · + ON REQ.

MAKE / FL SMALL

Recessed frameless installation with adjustable light source.

Polycarbonate lens ø 50mm. Beam angles: 15°-24°-36°-50°.






Reflector in matching finish included.
Additional colour options available as accessories.


CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39FL9K415S	935	39FL9K315S	919	9W 15°	100
39FL9K424S	935	39FL9K324S	919	9W 24°	100
39FL9K436S	935	39FL9K336S	919	9W 36°	100
39FL9K450S	935	39FL9K350S	919	9W 50°	100
39FL13K415S	1285	39FL13K315S	1263	13W 15°	100
39FL13K424S	1285	39FL13K324S	1263	13W 24°	100
39FL13K436S	1285	39FL13K336S	1263	13W 36°	100
39FL13K450S	1285	39FL13K350S	1263	13W 50°	100
39FL18K415S	1825	39FL18K315S	1795	18W 15°	100
39FL18K424S	1825	39FL18K324S	1795	18W 24°	100
39FL18K436S	1825	39FL18K336S	1795	18W 36°	100
39FL18K450S	1825	39FL18K350S	1795	18W 50°	100

MAKE / FL MEDIUM

Recessed frameless installation with adjustable light source.

Polycarbonate lens ø 75mm. Beam angles: 15°-24°-36°-50°-70°.





Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39FL18K415M	1944	39FL18K315M	1914	18W 15°	125
39FL18K424M	1944	39FL18K324M	1914	18W 24°	125
39FL18K436M	1944	39FL18K336M	1914	18W 36°	125
39FL18K450M	1944	39FL18K350M	1914	18W 50°	125
39FL18K470M	1944	39FL18K370M	1914	18W 70°	125
39FL27K415M	2610	39FL27K315M	2570	27W 15°	125
39FL27K424M	2610	39FL27K324M	2570	27W 24°	125
39FL27K436M	2610	39FL27K336M	2570	27W 36°	125
39FL27K450M	2610	39FL27K350M	2570	27W 50°	125
39FL27K470M	2610	39FL27K370M	2570	27W 70°	125
39FL36K415M	3497	39FL36K315M	3448	36W 15°	125
39FL36K424M	3497	39FL36K324M	3448	36W 24°	125
39FL36K436M	3497	39FL36K336M	3448	36W 36°	125
39FL36K450M	3497	39FL36K350M	3448	36W 50°	125
39FL36K470M	3497	39FL36K370M	3448	36W 70°	125

CE · C · RETILAP · 5 YEARS WARRANTY · IP 44 · IK 02 · -20° +35° · CRI>90 · Mac Adams 3 · RG0/RG1 · L90/B10 50.000h

On req.: DALI CODE — D · BT · 1 h EM · EM · 1h DEM · DEM · 3 h EM3H · EM3H · CODE K27 2700K · CODE K5 5000K

Body: Epoxy powder coated aluminium

Colours: COD.W · COD.BK · + ON REQ.

MAKE / FL LARGE

Recessed frameless installation with adjustable light source.

Polycarbonate lens ø 83mm. Beam angles: 15°-24°-36°-50°-70°.





Reflector in matching finish included.
Additional colour options available as accessories.


CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39FL25K415L	2553	39FL25K315L	2515	25W 15°	150
39FL25K424L	2553	39FL25K324L	2515	25W 24°	150
39FL25K436L	2553	39FL25K336L	2515	25W 36°	150
39FL25K450L	2553	39FL25K350L	2515	25W 50°	150
39FL25K470L	2553	39FL25K370L	2515	25W 70°	150
39FL36K415L	3503	39FL36K315L	3402	36W 15°	150
39FL36K424L	3503	39FL36K324L	3402	36W 24°	150
39FL36K436L	3503	39FL36K336L	3402	36W 36°	150
39FL36K450L	3503	39FL36K350L	3402	36W 50°	150
39FL36K470L	3503	39FL36K370L	3402	36W 70°	150
39FL40K415L	4401	39FL40K315L	4353	40W 15°	150
39FL40K424L	4401	39FL40K324L	4353	40W 24°	150
39FL40K436L	4401	39FL40K336L	4353	40W 36°	150
39FL40K450L	4401	39FL40K350L	4353	40W 50°	150
39FL40K470L	4401	39FL40K370L	4353	40W 70°	150

MAKE / DOUBLE MINI

Double adjustable recessed installation.

Polycarbonate lens ø 35mm. Beam angles: 15°-24°-36°-50°.





Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
39OR23K415MN	686	39OR23K315MN	654	2x3W 15°	78x158
39OR23K424MN	686	39OR23K324MN	654	2x3W 24°	78x158
39OR23K436MN	686	39OR23K336MN	654	2x3W 36°	78x158
39OR23K450MN	686	39OR23K350MN	654	2x3W 50°	78x158
39OR26K415MN	1322	39OR26K315MN	1260	2x6W 15°	78x158
39OR26K424MN	1322	39OR26K324MN	1260	2x6W 24°	78x158
39OR26K436MN	1322	39OR26K336MN	1260	2x6W 36°	78x158
39OR26K450MN	1322	39OR26K350MN	1260	2x6W 50°	78x158
39OR211K415MN	1794	39OR211K315MN	1704	2x11W 15°	78x158
39OR211K424MN	1794	39OR211K324MN	1704	2x11W 24°	78x158
39OR211K436MN	1794	39OR211K336MN	1704	2x11W 36°	78x158
39OR211K450MN	1794	39OR211K350MN	1704	2x11W 50°	78x158

CE · C · RETILAP · 5 YEARS WARRANTY

IP 44 · IK 02 · CRI>90 · Mac Adams 3 · RG0/RG1 · L90/B10 50.000h

On req.: DALI CODE — D · BT · 1 h EM · 1h DEM · 3 h EM · EM3H · CODE K27 2700K · CODE K5 5000K

Body: Epoxy powder coated aluminium


Colours: COD.W · COD.BK · ON REQ.

MAKE / DOUBLE SMALL

Double adjustable recessed installation.

Polycarbonate lens ø 50mm. Beam angles: 15°-24°-36°-50°.





Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
39OR29K415S	1870	39OR29K315S	1838	2x9W 15°	110x220
39OR29K424S	1870	39OR29K324S	1838	2x9W 24°	110x220
39OR29K436S	1870	39OR29K336S	1838	2x9W 36°	110x220
39OR29K450S	1870	39OR29K350S	1838	2x9W 50°	110x220
39OR213K415S	2570	39OR213K315S	2526	2x13W 15°	110x220
39OR213K424S	2570	39OR213K324S	2526	2x13W 24°	110x220
39OR213K436S	2570	39OR213K336S	2526	2x13W 36°	110x220
39OR213K450S	2570	39OR213K350S	2526	2x13W 50°	110x220
39OR218K415S	3650	39OR218K315S	3590	2x18W 15°	110x220
39OR218K424S	3650	39OR218K324S	3590	2x18W 24°	110x220
39OR218K436S	3650	39OR218K336S	3590	2x18W 36°	110x220
39OR218K450S	3650	39OR218K350S	3590	2x18W 50°	110x220

MAKE / DEEP MINI

Recessed installation with adjustable light source.

Polycarbonate lens ø 35mm. Beam angles: 15°-24°-36°-50°.





Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39AR3K415MN	291	39AR3K315MN	287	3W 15°	78
39AR3K424MN	291	39AR3K324MN	287	3W 24°	78
39AR3K436MN	291	39AR3K336MN	287	3W 36°	78
39AR3K450MN	291	39AR3K350MN	287	3W 50°	78
39AR6K415MN	500	39AR6K315MN	492	6W 15°	78
39AR6K424MN	500	39AR6K324MN	492	6W 24°	78
39AR6K436MN	500	39AR6K336MN	492	6W 36°	78
39AR6K450MN	500	39AR6K350MN	492	6W 50°	78
39AR11K415MN	651	39AR11K315MN	641	11W 15°	78
39AR11K424MN	651	39AR11K324MN	641	11W 24°	78
39AR11K436MN	651	39AR11K336MN	641	11W 36°	78
39AR11K450MN	651	39AR11K350MN	641	11W 50°	78

CE · C · RETILAP · 5 YEARS WARRANTY

IP 44 · IK 02 · CRI>90 · Mac Adams 3 · RG0/RG1 · L90/B10 50.000h · -20° +35°

On req.: DALI CODE — D · BT · 1 h EM · 1h DEM · 3 h EM · EM3H · CODE K27 2700K · CODE K5 5000K

Body: Epoxy powder coated aluminium

Colours: COD.W · COD.BK · ON REQ.

MAKE / DEEP SMALL

30°
355°



Recessed installation with adjustable light source.

Polycarbonate lens ø 50mm. Beam angles: 15°-24°-36°-50°.



Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39AR9K415S	831	39AR9K315S	817	9W 15°	110
39AR9K424S	831	39AR9K324S	817	9W 24°	110
39AR9K436S	831	39AR9K336S	817	9W 36°	110
39AR9K450S	831	39AR9K350S	817	9W 50°	110
39AR13K415S	1144	39AR13K315S	1124	13W 15°	110
39AR13K424S	1144	39AR13K324S	1124	13W 24°	110
39AR13K436S	1144	39AR13K336S	1124	13W 36°	110
39AR13K450S	1144	39AR13K350S	1124	13W 50°	110
39AR18K415S	1529	39AR18K315S	1503	18W 15°	110
39AR18K424S	1529	39AR18K324S	1503	18W 24°	110
39AR18K436S	1529	39AR18K336S	1503	18W 36°	110
39AR18K450S	1529	39AR18K350S	1503	18W 50°	110

ACCESSORIES



External reflector in Black PC.

39RFBK - MICRO
39RFBKMN - MINI
39RFBKS - SMALL
39RFBKM - MEDIUM
39RFBKL - LARGE



External reflector in White PC.

39RFW - MICRO
39RFWMN - MINI
39RFWS - SMALL
39RFWM - MEDIUM
39RFWL - LARGE




External reflector in chromed PC.

39RFA - MICRO
39RFAMN - MINI
39RFAS - SMALL
39RFAM - MEDIUM
39RFAL - LARGE



External reflector in golden PC.

39RFG - MICRO
39RFGMN - MINI
39RFGS - SMALL
39RFGM - MEDIUM
39RFGL - LARGE



Honeycomb optics, UGR<16.

39AAND - MICRO
39AANDMN- MINI
39AANDS - SMALL
39AANDM - MEDIUM
39AANDL - LARGE

Micro-engraved optics.

39AASL - MICRO
39AASLMN - MINI
39AASLS - SMALL
39AASLM - MEDIUM
39AASLL - LARGE

Frosted glass.

39AAVS - MICRO
39AAVSMN - MINI
39AAVSS - SMALL
39AAVSM - MEDIUM
39AAVSL - LARGE



Ring for UGR<16 reduction.


39AAUGR- MICRO
39AAUGRMN - MINI

MAKE / DEEP PRO MICRO



Recessed installation with a fixed, set-back light source.

Ø 25 mm polycarbonate lens. Beam angles: 15°–24°–36°–50°.



Reflector in matching finish included.
Additional colour options available as accessories.


CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39DL3K415	281	39DL3K315	267	3W 15°	58
39DL3K424	281	39DL3K324	267	3W 24°	58
39DL3K436	281	39DL3K336	267	3W 36°	58
39DL3K450	281	39DL3K350	267	3W 50°	58
39DL6K415	523	39DL6K315	510	6W 15°	58
39DL6K424	523	39DL6K324	510	6W 24°	58
39DL6K436	523	39DL6K336	510	6W 36°	58
39DL6K450	523	39DL6K350	510	6W 50°	58
39DL9K415	782	39DL9K315	741	9W 15°	58
39DL9K424	782	39DL9K324	741	9W 24°	58
39DL9K436	782	39DL9K336	741	9W 36°	58
39DL9K450	782	39DL9K350	741	9W 50°	58

MAKE / DEEP PRO MINI



Recessed installation with a fixed, set-back light source.

Ø 35 mm polycarbonate lens. Beam angles: 15°–24°–36°–50°.



Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39DL3K415MN	332	39DL3K315MN	324	3W 15°	76
39DL3K424MN	332	39DL3K324MN	324	3W 24°	76
39DL3K436MN	332	39DL3K336MN	324	3W 36°	76
39DL3K450MN	332	39DL3K350MN	324	3W 50°	76
39DL6K415MN	652	39DL6K315MN	622	6W 15°	76
39DL6K424MN	652	39DL6K324MN	622	6W 24°	76
39DL6K436MN	652	39DL6K336MN	622	6W 36°	76
39DL6K450MN	652	39DL6K350MN	622	6W 50°	76
39DL11K415MN	891	39DL11K315MN	844	11W 15°	76
39DL11K424MN	891	39DL11K324MN	844	11W 24°	76
39DL11K436MN	891	39DL11K336MN	844	11W 36°	76
39DL11K450MN	891	39DL11K350MN	844	11W 50°	76

CE · C · RETILAP
5 YEARS WARRANTY
IP 44 · IK 02
CRI>90 · RG0/RG1
Mac Adams 3
L90/B10 50.000h
-20° +35°


On req.: DALI CODE — D · BT · 1 h EM · 1h DEM · 3 h EM · EM3H
CODE K27 2700K · CODE K5 5000K

Body: Epoxy powder coated aluminium
Colours: COD.W · COD.BK · ON REQ.

MAKE / DEEP PRO SMALL

Recessed installation with a fixed, set-back light source.
Ø 50 mm polycarbonate lens. Beam angles: 15°–24°–36°–50°.






Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39DL9K415S	915	39DL9K315S	905	9W 15°	90
39DL9K424S	915	39DL9K324S	905	9W 24°	90
39DL9K436S	915	39DL9K336S	905	9W 36°	90
39DL9K450S	915	39DL9K350S	905	9W 50°	90
39DL13K415S	1265	39DL13K315S	1244	13W 15°	90
39DL13K424S	1265	39DL13K324S	1244	13W 24°	90
39DL13K436S	1265	39DL13K336S	1244	13W 36°	90
39DL13K450S	1265	39DL13K350S	1244	13W 50°	90
39DL18K415S	1802	39DL18K315S	1781	18W 15°	90
39DL18K424S	1802	39DL18K324S	1781	18W 24°	90
39DL18K436S	1802	39DL18K336S	1781	18W 36°	90
39DL18K450S	1802	39DL18K350S	1781	18W 50°	90

MAKE / DEEP PRO FL MICRO

Frameless recessed installation with fixed, set-back light source.
Ø 25 mm polycarbonate lens. Beam angles: 15°–24°–36°–50°.





Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39DF3K415	281	39DF3K315	267	3W 15°	48
39DF3K424	281	39DF3K324	267	3W 24°	48
39DF3K436	281	39DF3K336	267	3W 36°	48
39DF3K450	281	39DF3K350	267	3W 50°	48
39DF6K415	523	39DF6K315	510	6W 15°	48
39DF6K424	523	39DF6K324	510	6W 24°	48
39DF6K436	523	39DF6K336	510	6W 36°	48
39DF6K450	523	39DF6K350	510	6W 50°	48
39DF9K415	782	39DF9K315	741	9W 15°	48
39DF9K424	782	39DF9K324	741	9W 24°	48
39DF9K436	782	39DF9K336	741	9W 36°	48
39DF9K450	782	39DF9K350	741	9W 50°	48

CE · C · RETILAP · 5 YEARS WARRANTY · IP 44 · IK 02 · CRI>90 · Mac Adams 3 · RG0/RG1 · L90/B10 50.000h · -20° +35°

On req.: DALI CODE — D · BT · 1h EM · 1h DEM · 3h EM3H · CODE K27 2700K · CODE K5 5000K


Body: Epoxy powder coated aluminium

Colours: COD.W · COD.BK · ON REQ.

MAKE / DEEP PRO FL MINI

Frameless recessed installation with fixed, set-back light source.
Ø 35 mm polycarbonate lens. Beam angles: 15°–24°–36°–50°.






Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39DF3K415MN	332	39DF3K315MN	324	3W 15°	63
39DF3K424MN	332	39DF3K324MN	324	3W 24°	63
39DF3K436MN	332	39DF3K336MN	324	3W 36°	63
39DF3K450MN	332	39DF3K350MN	324	3W 50°	63
39DF6K415MN	652	39DF6K315MN	622	6W 15°	63
39DF6K424MN	652	39DF6K324MN	622	6W 24°	63
39DF6K436MN	652	39DF6K336MN	622	6W 36°	63
39DF6K450MN	652	39DF6K350MN	622	6W 50°	63
39DF11K415MN	891	39DF11K315MN	844	11W 15°	63
39DF11K424MN	891	39DF11K324MN	844	11W 24°	63
39DF11K436MN	891	39DF11K336MN	844	11W 36°	63
39DF11K450MN	891	39DF11K350MN	844	11W 50°	63

MAKE / DEEP PRO FL SMALL

Frameless recessed installation with fixed, set-back light source.
Ø 50 mm polycarbonate lens. Beam angles: 15°–24°–36°–50°.



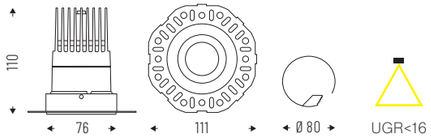

Reflector in matching finish included.
Additional colour options available as accessories.

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
39DF9K415S	915	39DF9K315S	905	9W 15°	76
39DF9K424S	915	39DF9K324S	905	9W 24°	76
39DF9K436S	915	39DF9K336S	905	9W 36°	76
39DF9K450S	915	39DF9K350S	905	9W 50°	76
39DF13K415S	1265	39DF13K315S	1244	13W 15°	76
39DF13K424S	1265	39DF13K324S	1244	13W 24°	76
39DF13K436S	1265	39DF13K336S	1244	13W 36°	76
39DF13K450S	1265	39DF13K350S	1244	13W 50°	76
39DF18K415S	1802	39DF18K315S	1781	18W 15°	76
39DF18K424S	1802	39DF18K324S	1781	18W 24°	76
39DF18K436S	1802	39DF18K336S	1781	18W 36°	76
39DF18K450S	1802	39DF18K350S	1781	18W 50°	76

CE · C · RETILAP · 5 YEARS WARRANTY · IP 44 · IK 02 · CRI>90 · Mac Adams 3 · RG0/RG1 · L90/B10 50.000h · -20° +35°

On req.: DALI CODE — D · BT · 1h EM · 1h DEM · 3h EM3H · CODE K27 2700K · CODE K5 5000K

Body: Epoxy powder coated aluminium

Colours: COD.W · COD.BK · ON REQ.

ACCESSORIES



Black PC aesthetic reflector.

39RFDLBK - MICRO
39RFDLMNBK - MINI
39RFDLSBK - SMALL



White PC aesthetic reflector.

39RFDLW - MICRO
39RFDLMNW - MINI
39RFDLSW - SMALL



Chromed PC aesthetic reflector.

39RFDLA - MICRO
39RFDLMNA - MINI
39RFDLSA - SMALL



Gold PC aesthetic reflector.

39RFDLG - MICRO
39RFDLMNG - MINI
39RFDLSG - SMALL

