

MAKE R is the new **swiveling and adjustable downlight**. Available in **mini, small, medium and large size**, with various diameter possibilities, it can be equipped with narrow or wide beam optics. The free **rotating body can be partially extracted and tilted** or remain completely recessed, making MAKE R extremely versatile for office, retail and all those installations that require **dynamic lighting**.

☑ Features

- Direct emission
- UGR<19
- IP 44

💡 Led

- 3000K/4000K
- >100 lm/W
- CRI>90
- Eye safety: RGO/RGI
- Mac Adams 3
- L80/B10 >50.000h

🕒 Specifications

- Polycarbonate lens, beam angles: 15°-24°-36°-50°
- Front reflector in polycarbonate

☐ Body

- Aluminum with epoxy powder coating

🎨 Colors

- White RAL 9003 wrinkled - code W
- Black RAL 9005 wrinkled - code BK


☆ Certifications

- CE Conformity
- RETILAP Conformity
- Energy efficiency C
- 5 years warranty

📦 On request

- DALI - code D
- Bluetooth - code BT*
- Emergency 1 hr - code EM
- Emergency 3 hrs - code EM3H*
- 2700K - code K27*
- 5000K - code K5*

* Where available

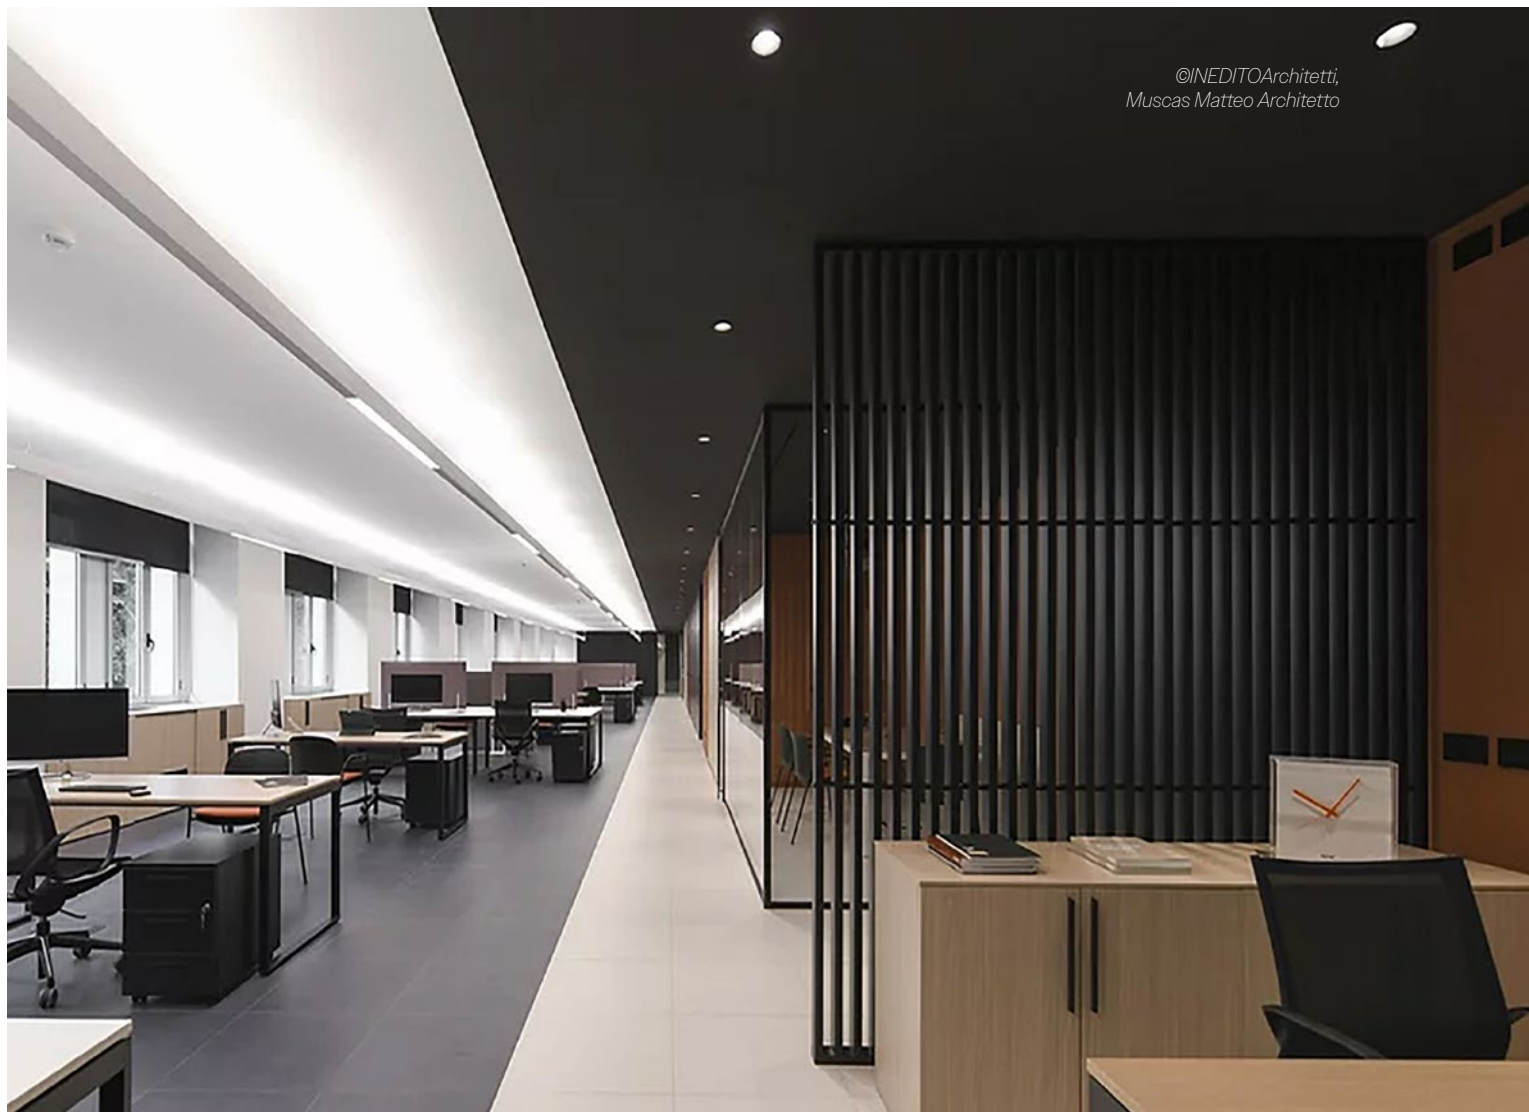



©NEDITOArchitetti,
Muscas Matteo Architetto

MAKE R MINI

Adjustable and swiveling recessed installation.

Polycarbonate lens \varnothing 35mm.

Beam: 24°-36°-50°.



IP 44

Cod. 4000K	Led	lm	Ømm
390A3K424MN	3W 24°	420	78
390A3K436MN	3W 36°	420	78
390A3K450MN	3W 50°	420	78
390A6K424MN	6W 24°	700	78
390A6K436MN	6W 36°	700	78
390A6K450MN	6W 50°	700	78



Cod. 3000K	Led	lm	Ømm
390A3K324MN	3W 24°	374	78
390A3K336MN	3W 36°	374	78
390A3K350MN	3W 50°	374	78
390A6K324MN	6W 24°	623	78
390A6K336MN	6W 36°	623	78
390A6K350MN	6W 50°	623	78

MAKE R SMALL

Adjustable and swiveling recessed installation.

Polycarbonate lens \varnothing 50mm.

Beam: 15°-24°-36°-50°.



IP 44

Cod. 4000K	Led	lm	Ømm
390A12K415S	12W 15°	1560	138
390A12K424S	12W 24°	1560	138
390A12K436S	12W 36°	1560	138
390A12K450S	12W 50°	1560	138
390A17K415S	17W 15°	2200	138
390A17K424S	17W 24°	2200	138
390A17K436S	17W 36°	2200	138
390A17K450S	17W 50°	2200	138
390A24K415S	24W 15°	3000	138
390A24K424S	24W 24°	3000	138
390A24K436S	24W 36°	3000	138
390A24K450S	24W 50°	3000	138



Cod. 3000K	Led	lm	Ømm
390A12K315S	12W 15°	1388	138
390A12K324S	12W 24°	1388	138
390A12K336S	12W 36°	1388	138
390A12K350S	12W 50°	1388	138
390A17K315S	17W 15°	1958	138
390A17K324S	17W 24°	1958	138
390A17K336S	17W 36°	1958	138
390A17K350S	17W 50°	1958	138
390A24K315S	24W 15°	2670	138
390A24K324S	24W 24°	2670	138
390A24K336S	24W 36°	2670	138
390A24K350S	24W 50°	2670	138

MAKE R MEDIUM

Adjustable and swiveling recessed installation.

Polycarbonate lens \varnothing 75mm.

Beam: 15°-24°-36°-50°.



IP 44

Cod. 4000K	Led	lm	Ømm
390A17K415M	17W 15°	2020	165
390A17K424M	17W 24°	2020	165
390A17K436M	17W 36°	2020	165
390A17K450M	17W 50°	2020	165
390A24K415M	24W 15°	2850	165
390A24K424M	24W 24°	2850	165
390A24K436M	24W 36°	2850	165
390A24K450M	24W 50°	2850	165
390A31K415M	31W 15°	3700	165
390A31K424M	31W 24°	3700	165
390A31K436M	31W 36°	3700	165
390A31K450M	31W 50°	3700	165



Cod. 3000K	Led	lm	Ømm
390A17K315M	17W 15°	1798	165
390A17K324M	17W 24°	1798	165
390A17K336M	17W 36°	1798	165
390A17K350M	17W 50°	1798	165
390A24K315M	24W 15°	2537	165
390A24K324M	24W 24°	2537	165
390A24K336M	24W 36°	2537	165
390A24K350M	24W 50°	2537	165
390A31K315M	31W 15°	3293	165
390A31K324M	31W 24°	3293	165
390A31K336M	31W 36°	3293	165
390A31K350M	31W 50°	3293	165

MAKE R LARGE

Adjustable and adjustable recessed installation.

Polycarbonate \varnothing 83mm.

Lens Beam: 15°-24°-36°-50°.



IP 44

Cod. 4000K	Led	lm	Ømm
390A27K415L	27W 15°	3529	195
390A27K424L	27W 24°	3529	195
390A27K436L	27W 36°	3529	195
390A27K450L	27W 50°	3529	195
390A35K415L	35W 15°	4577	195
390A35K424L	35W 24°	4577	195
390A35K436L	35W 36°	4577	195
390A35K450L	35W 50°	4577	195

Cod. 3000K	Led	lm	Ømm
390A27K315L	27W 15°	3294	195
390A27K324L	27W 24°	3294	195
390A27K336L	27W 36°	3294	195
390A27K350L	27W 50°	3294	195
390A35K315L	35W 15°	4278	195
390A35K324L	35W 24°	4278	195
390A35K336L	35W 36°	4278	195
390A35K350L	35W 50°	4278	195

ACCESSORIES




Chromed PC aesthetic reflector.

39RFRAMN - MINI
39RFRAS - SMALL
39RFRAM - MEDIUM
39RFRAL - LARGE



Gold PC aesthetic reflector.

39RFRGMN - MINI
39RFRGS - SMALL
39RFRGM - MEDIUM
39RFRGL - LARGE



Honeycomb.

39AANDRMN - MINI
39AANDRS - SMALL
39AANDRM - MEDIUM
39AANDRL - LARGE



Micro-engraved optics.

39AASLRMN - MINI
39AASLRS - SMALL
39AASLRM - MEDIUM
39AASLRL - LARGE



Frosted glass.

39AAVSRMN - MINI
39AAVSR - SMALL
39AAVSRM - MEDIUM
39AAVSR - LARGE