



NEXT





NEXT is the **contemporary design** fixture that perfectly fits in those architectural contexts where **sober and minimal shapes** are required. It is available as indoor versions for ceiling, recessed or recessed frameless installation, with **controlled UGR optics (<16)**. The wall version comes in single or double emission, with PG optics that guarantee a powerful and diffused emission. **NEXT** is also available in the IP66 outdoor ceiling version.

ID 50









esse-ci

FEATURES

-  Direct emission
-  Direct/Indirect emission
-  UGR <22; <16
-  IP 40; 66




LED

-  3000K/4000K
-  >107 lm/W
-  CRI >90
-  Eye safety: R60/R61
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  EEA Conformity
-  Energy efficiency
-  5 years warranty

ON REQUEST

-  DALI - code D
-  Bluetooth - code BT*
-  Emergency 1 hr - code EM*
Emergency 3 hrs - code EM3H*
-  2700K - code K27*

SPECIFICATIONS

Built-in driver.
SMD LED technology.
High Contrast UGR <16 diffuser.
Impact resistant satin acrylic diffuser with perimeter screen printing.
Aluminum frame with sealing gasket.
Homogeneous emission with UGR <22.

BODY

Die-cast aluminum with epoxy powder coating.

COLORS

White RAL 9003 wrinkled - code W
Black RAL 9005 wrinkled - code BK

RELATED PRODUCTS

Next IP66 (P. 169)
Next DK LV (P. 209)


* Where available

NEXT DK CEILING

Accessories on page 170.

IP 40

High Contrast dffuser UGR <16.



Cod. 4000K		lm	L mm
50DK16K4C	16W	1226	82x82

Cod. 3000K		lm	L mm
50DK16K3C	16W	1163	82x82


DOWNLIGHT

NEXT DK RECESSED

Accessories on page 170.

IP 40

High Contrast dffuser UGR <16.



Cod. 4000K		lm	L mm
50DK16K4R	16W	1226	100x100


Cod. 3000K		lm	L mm
50DK16K3R	16W	1163	100x100

NEXT DK RECESSED FL

Accessories on page 170.

IP 40

High Contrast diffuser UGR <16.



Cod. 4000K		lm	L mm
50DK16K4F	16W	1226	83x83


Cod. 3000K		lm	L mm
50DK16K3F	16W	1163	83x83

NEXT WALL

Accessories on page 170.

IP 40

Impact resistant satin-acrylic diffuser PG with perimeter screen printing, UGR <22.

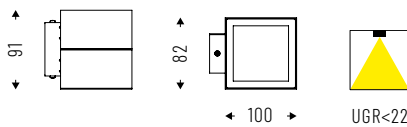

Cod. 4000K		lm	L mm
50PG10K4W	10W	652	82x100


Cod. 3000K		lm	L mm
50PG10K3W	10W	616	82x100

NEXT WALL DOUBLE EMISSION

Accessories on page 170.

IP 40

Impact resistant satin-acrylic diffuser PG with perimeter screen printing, UGR <22.

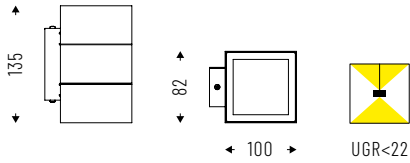

Cod. 4000K	Icon	lm	L mm
50DI20PGK4W	20W	1303	82x100

Cod. 3000K	Icon	lm	L mm
50DI20PGK3W	20W	1230	82x100


DOWNLIGHT

NEXT IP66 CEILING

Accessories on page 170.

IP 66

Impact resistant satin-acrylic diffuser PG with perimeter screen printing, UGR <22.



Cod. 4000K	Icon	lm	L mm
50PG10K4C66	10W	652	82x82

Cod. 3000K	Icon	lm	L mm
50PG10K3C66	10W	616	82x82

ACCESSORIES



5 poles-ceiling power cable for suspended applications (IP40 version). Cable length 2000mm.

50AA165P

TECHNICAL NOTES



NEXT IP66 CEILING IS IDEAL FOR PORCHES AND LOGGIAS.

