

esse-ci

ID CODE: 50



suspended
/ceiling



recessed



wall



outdoor IP



low voltage

NEXT

Design: Esse-Ci



NEXT is the new fixture with a **contemporary design** that fits perfectly in those contexts where architectural design requires sober and minimal shapes.

Available in indoor versions with ceiling, recessed or recessed frameless, with controlled UGR optics (<16), or wall with mono or double emission with PG optics that guarantees a powerful and diffused emission. Available also the IP66 outdoor ceiling version.





ID CODE: 50

NEXT

SPECIFICATIONS

FEATURES

- Direct Emission
- Direct/Indirect Emission
- UGR <22; <16
- IP 40; 66

LED

- 3000K/4000K
- >107 lm/W
- CRI >90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B10 >50.000h

CERTIFICATIONS

- CE
- A+
- 5 years warranty

ON REQUEST


- DALI - RDD code*
 - Bluetooth - BT code*
 - Emergency kit 1/3 hour EM/EM3h code*
- *verify the version

Specifications	· SMD LED Technology · Built-in driver	Body	Aluminium body with epoxy powder coating.
Optic	· High Contrast diffuser UGR <16. · PG Acryl-Satiné and impact resistant diffuser with perimeter silkscreen and homogeneous emission (UGR<22), mounted on aluminum frame with sealing gasket.	Colour	○ White RAL 9003 wrinkled - Code: W ● Black RAL 9005 wrinkled - Code: BK


NEXT DK CEILING

OPTIC

High Contrast diffuser UGR <16.

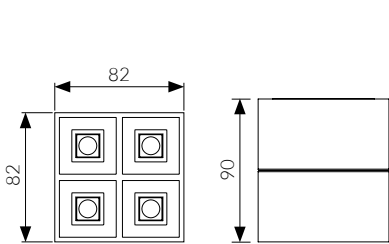

IP 40 A+

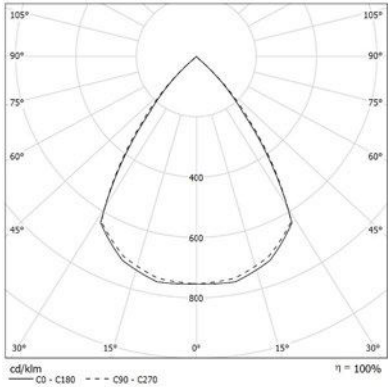


COLOUR TEMPERATURE			4000K
COD		lm	
50DK16L49C	16W	1226	

			3000K
COD		lm	
50DK16L39C	16W	1163	


NEXT DK RECESSED

OPTIC

High Contrast diffuser UGR <16.

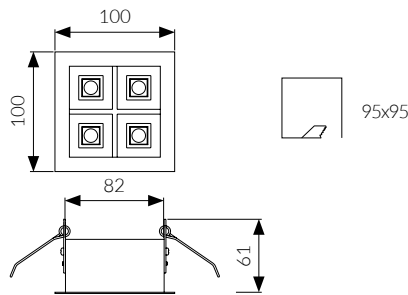

IP 40 A+

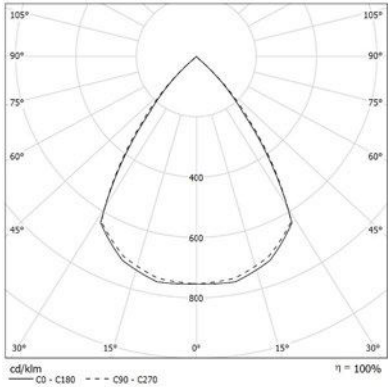


COLOUR TEMPERATURE			4000K
COD		lm	
50DK16L49R	16W	1226	

			3000K
COD		lm	
50DK16L39R	16W	1163	


NEXT DK RECESSED FL

OPTIC

High Contrast diffuser UGR <16.

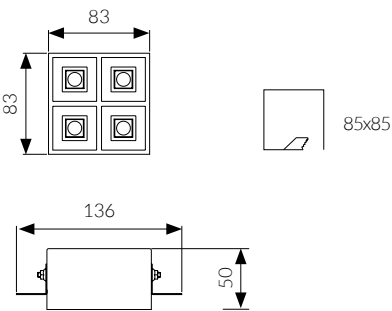

IP 40 A+

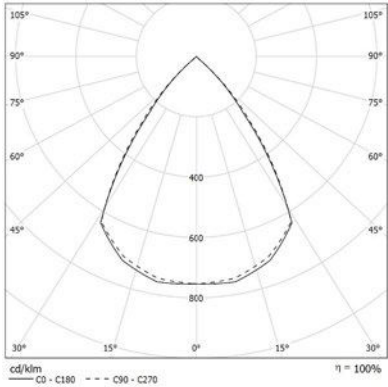

COLOUR TEMPERATURE

4000K


COD		lm
50DK16L49F	16W	1226

COD		lm
50DK16L39F	16W	1163

NEXT WALL

OPTIC

PG acryl-Satiné and impact resistant diffuser with perimeter silkscreen, UGR<22.

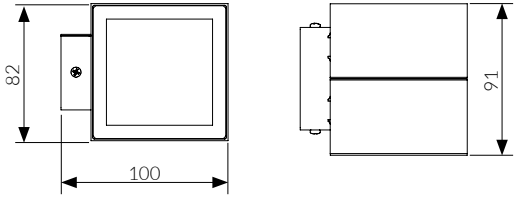

COLOUR TEMPERATURE


4000K

COD		lm
50PG10L49W	10W	652

NEXT WALL
DOUBLE EMISSION

OPTIC

PG acryl-Satiné and impact resistant diffuser with perimeter silkscreen, UGR<22.

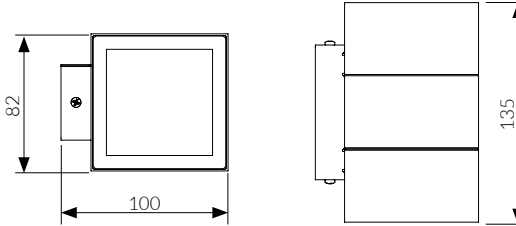


COLOUR TEMPERATURE

4000K

COD		lm
50DI20PGL49W	20W	1303




IP 40 A+

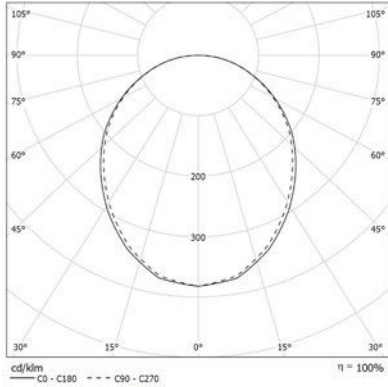

COD		lm
50PG10L39W	10W	616



IP 40 A+

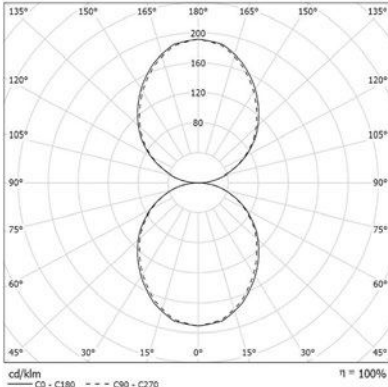


COD		lm
50DI20PGL39W	20W	1230


NEXT IP66 CEILING

OPTIC

PG acryl-Satiné and impact resistant diffuser with perimeter silkscreen, UGR<22.

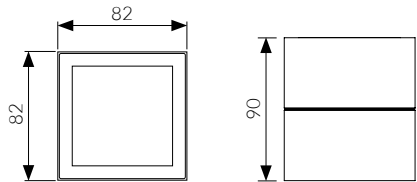

IP 66 A+

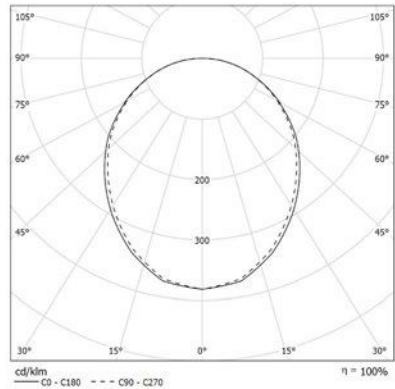


COD		lm
50PG10L39C66	10W	616

NEXT DK LV


Installabile su binari low voltage 48V.

OTTICA

Diffusore High Contrast UGR <16.

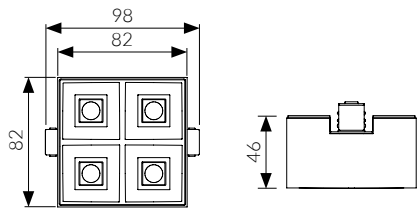

IP 40 A+

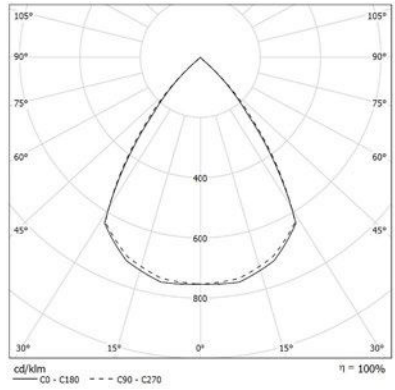

COLOUR TEMPERATURE		4000K
COD		lm
50DK11L49LV	11W	875

COD		lm
50DK11L39LV	11W	830


ID CODE: 50

ACCESSORIES



50AA165P
5 poles-ceiling rose power cable for suspended applications (IP40 version).
Cable length 2000mm.

TECHNICAL NOTE

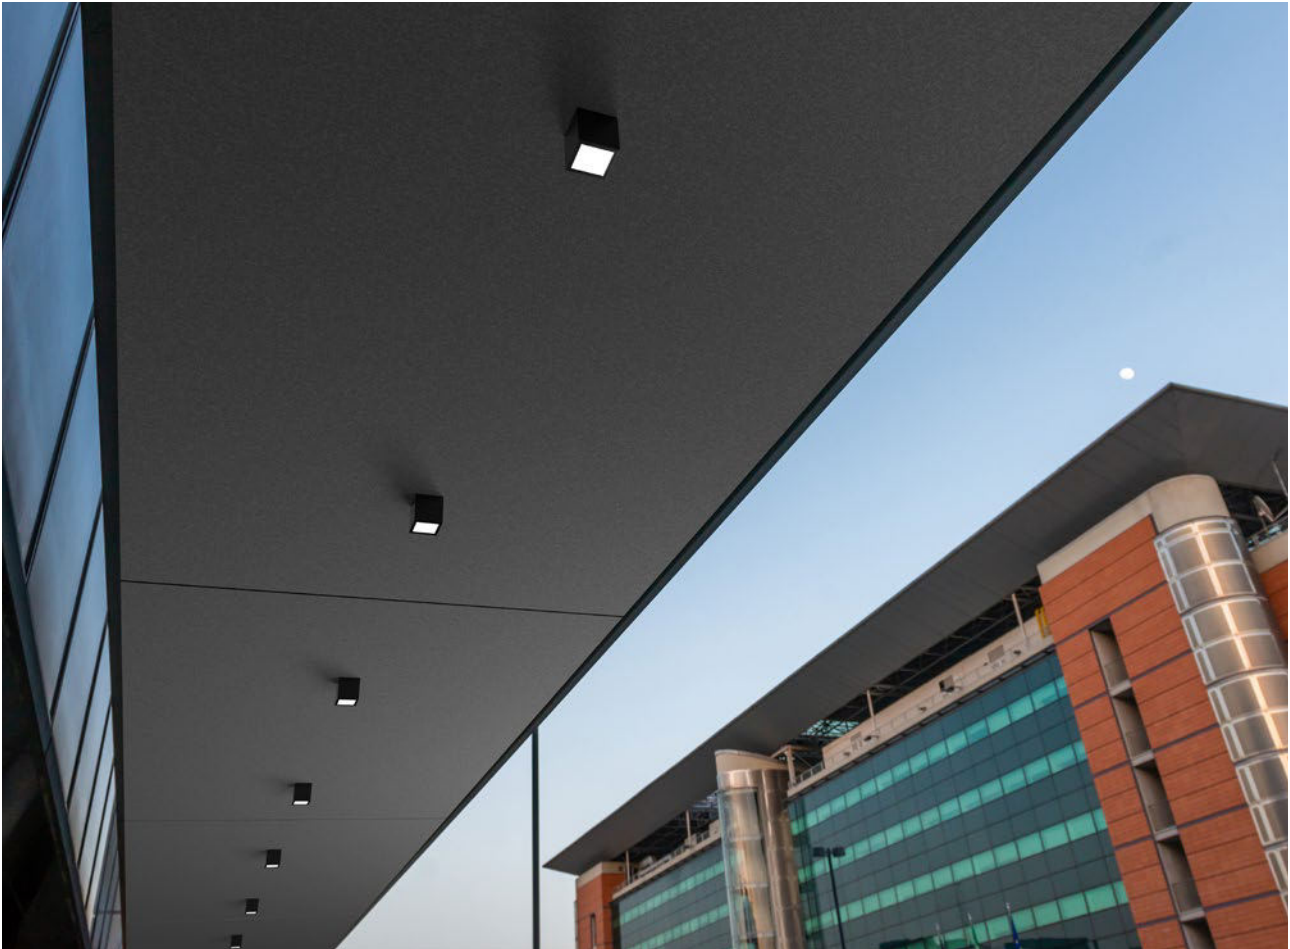

NEXT IP66 CEILING is perfect for porches and loggias.