


OPERA

ID 94




OPERA FREE PROFILE



OPERA INDIRECT PROFILE



OPERA PG



OPERA DK



CE

RoHS

RETI LAP

IP 20/40

CRI>90

MacAdam 3

5 YEARS WARRANTY

☐

-20°
+35°


RG0/RG1

L90/B10
50.000h


Body
Anodised aluminium

OPERA FREE / PROFILE

Aluminium trimless profile for plastering.




Cod.	mm
94AA500	500
94AA1000	1000
94AA2000	2000
94AA3000	3000

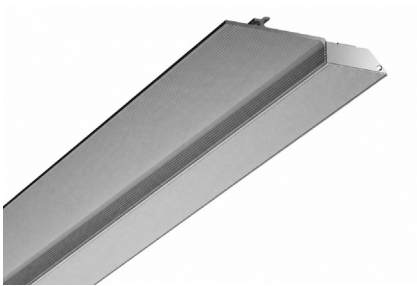

Accessories not included.
FLEX STRIP LED on page 106; DRIVERS on page 109.

OPERA / INDIRECT PROFILE

Aluminium profile with satin-finish methacrylate diffuser for uniform indirect light emission, UGR<22.
Luminaire complete with 20 W/m LED strip and driver.

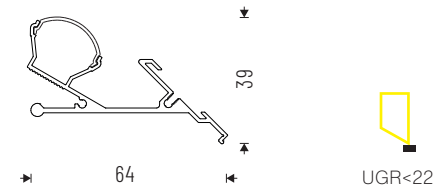

CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
94IN10K4	1060	94IN10K3	984	10W	500
94IN20K4	2120	94IN20K3	1968	20W	1000
94IN40K4	4240	94IN40K3	3936	40W	2000
94IN60K4	6360	94IN60K3	5904	60W	3000

CCT. 2700K	lm	Led	Lmm
94IN10K27	914	10W	500
94IN20K27	1828	20W	1000
94IN40K27	3656	40W	2000
94IN60K27	5484	60W	3000



CE

RoHS

RETI LAP

IP 20/40

CRI>90

MacAdam 3

5 YEARS WARRANTY

☐

-20°
+35°

RG0/RG1

L90/B10
50.000h

On req.:
 CODE - D
 BT
 1h EM
 1h DEM
 3h EM
CODE K27
2700K
CODE K5
5000K

Body
Anodised aluminium

Colours

COD.W

COD.BK

ONREQ.

OPERA / PG

Satin-finish PMMA diffuser for uniform direct light emission, complete with 20 W/m LED strip and driver.




CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
94PG10K4	1080	94PG10K3	1004	10W	500
94PG20K4	2160	94PG20K3	2009	20W	1000
94PG40K4	3240	94PG40K3	3012	40W	2000

CCT. 2700K	lm	Led	Lmm
94PG10K27	934	10W	500
94PG20K27	1868	20W	1000
94PG40K27	2802	40W	2000

OPERA / DK

Aluminium profile with microcell optics for direct light emission, UGR<19. Luminaire complete with driver and disposable cover strip.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
94DK5K4	380	94DK5K3	349	5W 60°	128x26

CE

RETILAP

5 YEARS WARRANTY

IP 20/40

CRI>90

MacAdam 3

-20° +35°

RG0/RG1

L90/B10 50.000h

On req.:

BT

1h EM

1h DEM

3h EM

CODE K27 2700K

CODE K5 5000K

Body

Anodised aluminium

Colours


COD.W

COD.BK

ONREQ.

OPERA / SPOT

Spotlight for use with Opera. PMMA lenses with beam angles: 15° - 24° - 36° - 50°.

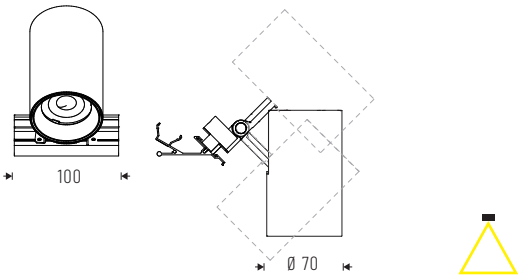

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
94PC14K415	2492	94PC14K315	2329	14W 15°	70
94PC14K424	2492	94PC14K324	2329	14W 24°	70
94PC14K436	2492	94PC14K336	2329	14W 36°	70
94PC14K450	2492	94PC14K350	2329	14W 50°	70



CE

RETILAP

5 YEARS WARRANTY

IP 20/40

CRI>90

MacAdam 3

-20° +35°

RG0/RG1

L90/B10 50.000h

On req.:

BT

1h EM

1h DEM

3h EM

CODE K27 2700K

CODE K5 5000K

Body

Anodised aluminium

Colours

COD.W

COD.BK

ONREQ.