

FEATURES

-  Direct emission
-  UGR <22
-  IP 40

LED

-  3000K/4000K
-  >98 lm/W
-  CRI >90
-  Eye safety: R60/R61
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  EEA Conformity
-  Energy efficiency
-  5 years warranty

ON REQUEST

-  DALI - code D
-  Bluetooth - code BT*
-  Emergency 1 hr - code EM
Emergency 3 hrs - code EM3R*
-  2700K - code K27*
5000K - code K5*
-  Human Centric Lighting*

SPECIFICATIONS

Built-in driver.
Diffuser in extruded PMMA for soft emission without shadow areas.

BODY

Aluminum with epoxy powder coating.

COLORS

Matte white RAL 9003 - code B
Matte black RAL 9005 - code C8

OVVIO DISPLAY LED

OVVIO DISPLAY LED is the recessed luminaire for plasterboard ceilings with a **compact design** and a **framebit of 4mm**. Fastening system and quick electrical connection facilitate the installation. Low and high power LED modules allow to always find the best lighting solution. The maximum length of the profiles is over three metres, with a 280mm modularity and corner elements for wall or ceiling mount.

ID 40




* Where available

esse-ci

OVVIO DISPLAY LED LOW POWER

IP 40

Diffuser in extruded PMMA (UGR <22) for soft emission without shadow areas.

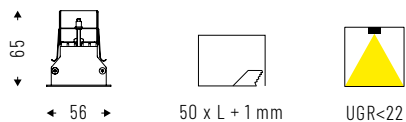


Cod. 4000K	Icon	L mm	lm	L mm
40PG18K4	18W	844	1770	872
40PG24K4	24W	1124	2360	1152
40PG30K4	30W	1404	2951	1432
40PG36K4	36W	1684	3540	1712
40PG42K4	42W	1964	4130	1992
40PG48K4	48W	2244	4721	2272
40PG54K4	54W	2524	5310	2552
40PG60K4	60W	2804	5900	2832
40PG66K4	66W	3084	6490	3112

Cod. 3000K	Icon	L mm	lm	L mm
40PG18K3	18W	844	1733	872
40PG24K3	24W	1124	2310	1152
40PG30K3	30W	1404	2888	1432
40PG36K3	36W	1684	3465	1712
40PG42K3	42W	1964	4043	1992
40PG48K3	48W	2244	4621	2272
40PG54K3	54W	2524	5198	2552
40PG60K3	60W	2804	5776	2832
40PG66K3	66W	3084	6354	3112

OVVIO DISPLAY LED HIGH POWER

IP 40

Diffuser in extruded PMMA (UGR <22) for soft emission without shadow areas.

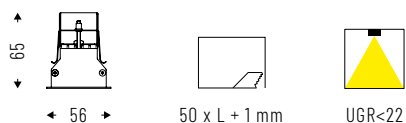

Cod. 4000K	Icon	L mm	lm	L mm
40PG48K4HP	48W	1124	4719	1152
40PG60K4HP	60W	1404	5900	1432
40PG72K4HP	72W	1684	7080	1712

Cod. 3000K	Icon	L mm	lm	L mm
40PG48K3HP	48W	1124	4621	1152
40PG60K3HP	60W	1404	5776	1432
40PG72K3HP	72W	1684	6931	1712

ACCESSORIES



End caps kit.
(Consider + 4 mm on
the cutting length).

40AA09LED



Linear joint.

40AA11LED



PG screen(UGR <22)
in 10 m roll to be cut to measure
for continuous lines without
interruptions.

40PG10000