




/ 3 9 6

O V V I O L E D

3 9 7 /

# O V V I O L E D

Design Serge & Robert Cornelissen

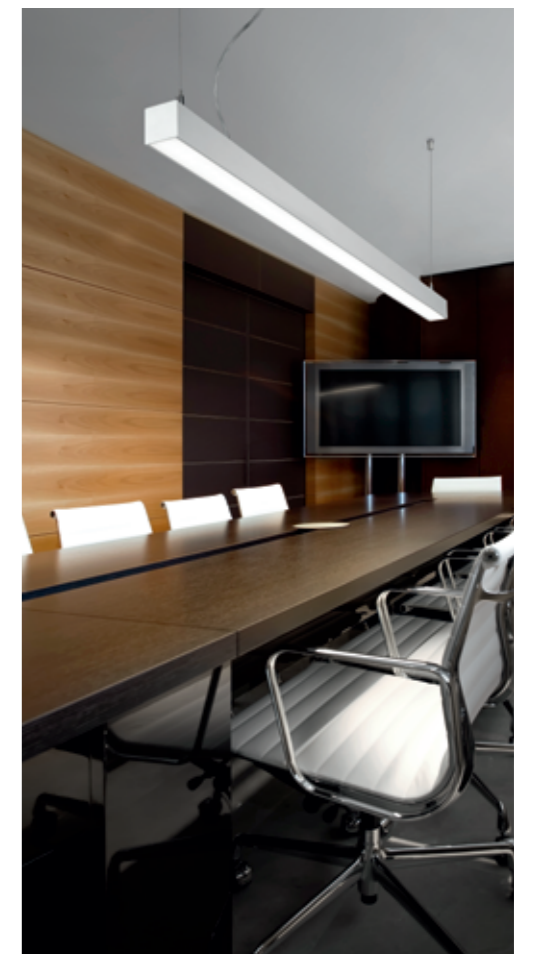


**η** >103 lm/W

**CRI** >80

**IP** 40

**UGR** <22



| mm         | 1125 | 1405 | 1685 | 2805 | 3085 |
|------------|------|------|------|------|------|
| W          |      |      |      |      |      |
| Low Power  | 24   | 30   | 36   | 60   | 66   |
| High Power | 48   | 60   | 72   |      |      |



/ 3 9 8

O V V I O L E D

3 9 9 /



# O V V I O L E D

OVVIO LED is the perfect fusion of performance, versatility and clean minimal design, all in a single product. State-of-the-art LED technology ensures optimum performance, longevity and low energy demand.

The product can be installed individually, or in long continuous lines. When used with accessories Ovvio can be installed as a pendant fixture, or directly to the surface of a wall or ceiling. Pendant versions can be height adjusted using the clutch operated wire suspensions and all products come through wired as standard.

## SPECIFICATIONS

- 350mA integrated Driver
- Colour temperature: 3000K/4000K
- High efficiency LED modules CRI>80
- Mac Adams 3
- Life Time: L80/B50 >50.000h
- 5 years complete warranty
- Eye safety: risk-free (RG 0) in accordance with EN62471:2009

## OPTICS

PMMA diffuser for a soft emission with no shadow evident.

## BODY

Body in extruded aluminum with epoxy powder coating.

## LEGAL REFERENCES

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

## CERTIFICATIONS

**CE** IP40

ErP Class: A<sup>++</sup>

## COLOURS

White RAL 9003 - Code: B

Aluminum grey - Code: C6

## ON REQUEST

- Wiring DALI dimmable - Code: RDD (verify the version available)
- Wiring with emergency kit - Code: EM for 1 hour / EM3H for 3 hours (verify the version available)
- Colour Temperature 5000K
- CRI>90 Premium Version
- Driver Bluetooth - Code: BT (verify the version available)

## VERSIONS

OVVIO LED LOW POWER  
OVVIO LED HIGH POWER  
ACCESSORIES



/ 4 0 0


# OVVIO LED PG LOW POWER



## OPTIC

PMMA diffuser for a soft emission with no shadow evident.

IP40 A++

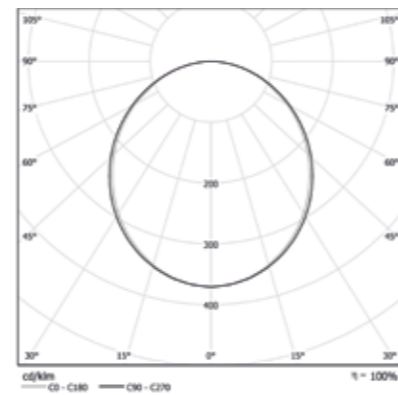

## COLOUR TEMPERATURE //

### 4 0 0 0 K

| COD      |           | lm   | mm   |
|----------|-----------|------|------|
| 71PG24L4 | 24W 4000K | 2493 | 1125 |
| 71PG30L4 | 30W 4000K | 3116 | 1405 |
| 71PG36L4 | 36W 4000K | 3740 | 1685 |
| 71PG60L4 | 60W 4000K | 5838 | 2805 |
| 71PG66L4 | 66W 4000K | 6856 | 3085 |

### 3 0 0 0 K

| COD      |           | lm   | mm   |
|----------|-----------|------|------|
| 71PG24L3 | 24W 3000K | 2391 | 1125 |
| 71PG30L3 | 30W 3000K | 2989 | 1405 |
| 71PG36L3 | 36W 3000K | 3587 | 1685 |
| 71PG60L3 | 60W 3000K | 5978 | 2805 |
| 71PG66L3 | 66W 3000K | 6576 | 3085 |



# OVVIO LED PG HIGH POWER

# OVVIO LED



4 0 1 /



## OPTIC

PMMA diffuser for a soft emission with no shadow evident.

IP40 A++

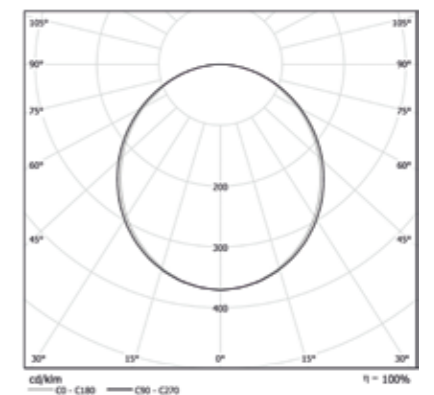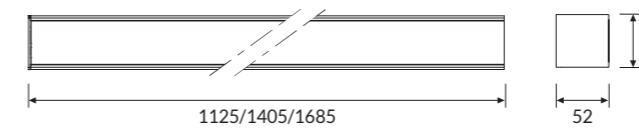

## COLOUR TEMPERATURE //

### 4 0 0 0 K

| COD        |           | lm   | mm   |
|------------|-----------|------|------|
| 71PG48L4HP | 48W 4000K | 5037 | 1125 |
| 71PG60L4HP | 60W 4000K | 6296 | 1405 |
| 71PG72L4HP | 72W 4000K | 7556 | 1685 |

### 3 0 0 0 K

| COD        |           | lm   | mm   |
|------------|-----------|------|------|
| 71PG48L3HP | 48W 3000K | 4865 | 1125 |
| 71PG60L3HP | 60W 3000K | 6042 | 1405 |
| 71PG72L3HP | 72W 3000K | 6869 | 1685 |



**ACCESSORIES**

OVVIO LED SUSPENDED ACCESSORIES



**71AA13**

Single wire 1500mm long adjustable suspension kit.



**71AA1330**

Single wire 3000mm long adjustable suspension kit.



**71AA16**

3 poles-powered supply box. Cable length 2000mm.



**71AA165P**

5 poles-powered supply box. Cable length 2000mm.



**71AA11LED**

Linear joint.



**71AA09LED**

End caps kit.

OVVIO LED WALL ACCESSORIES



**71AA15LED**

Kit for wall mounting.

**TECHNICAL NOTE**

