










FEATURES

-  Direct emission
-  UGR <22
-  IP 40



LED

-  2700K / 3000K / 4000K / 5000K / TW / RGBW / DTW
-  >100 lm/W
-  CRI >90
-  Eye safety: R60/R61
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  EEA Conformity
-  Energy efficiency
-  5 years warranty

ON REQUEST

-  DALI - code D*
-  Emergency 1 hr - code EM*
Emergency 3 hrs - code EM3R*

SPECIFICATIONS

SMD LED technology
on 24V adhesive strip.
Satin methacrylate diffuser for
homogeneous emission UGR <22.

BODY


Anodized aluminum



PROFREEL SLIM

PROFREEL, the fully customizable line of luminaires for continuous rows, is enriched with a new version that makes installation even faster and more precise: **PROFREEL SLIM**. Characterized by a **T-section** that covers any imperfections of the cut, it allows the application of thin blades of light quickly and easily. **PROFREEL SLIM** is available in two variants: the **DISPLAY** version, ready for installation, and the **FREE** version, which can be customized directly on site.

ID 83

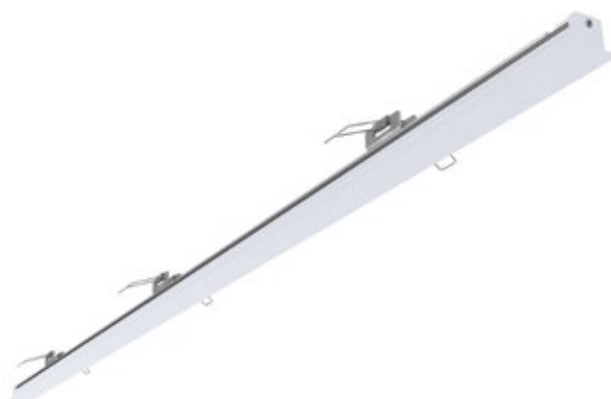

PROFREEL SLIM ^{DISPLAY}

IP 40

PG diffuser in extruded opal PMMA for homogeneous emission UGR <22.




Cod. 4000K	Icon	lm	L mm
83P05K4	5W	385	516
83P09K4	9W	516	516
83P011K4	11W	647	516
83P08K4	8W	616	816
83P012K4	12W	826	816
83P016K4	16W	1036	816
83P010K4	10W	770	1016
83P017K4	17W	1033	1016
83P021K4	21W	1295	1016
83P015K4	15W	1155	1516
83P023K4	23W	1549	1516
83P031K4	31W	1942	1516
83P020K4	20W	1540	2016
83P030K4	30W	2065	2016
83P040K4	40W	2590	2016

Cod. 3000K	Icon	lm	L mm
83P05K3	5W	368	516
83P09K3	9W	493	516
83P011K3	11W	619	516
83P08K3	8W	589	816
83P012K3	12W	790	816
83P016K3	16W	990	816
83P010K3	10W	736	1016
83P017K3	17W	987	1016
83P021K3	21W	1238	1016
83P015K3	15W	1104	1516
83P023K3	23W	1480	1516
83P031K3	31W	1857	1516
83P020K3	20W	1472	2016
83P030K3	30W	1974	2016
83P040K3	40W	2476	2016

PROFREEL SLIM ^{FREE}

Aluminum profile for recessed applications that can be sectioned at will, complete with PG screen, end caps and spring kit.

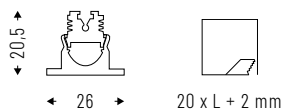

COD	L mm
83P01000	1000
83P02000	2000
83P03000	3000

COMPATIBLE **FLEX STRIP LED** ON PAGE 67