



PCM LED EVO PC

OPTIC

Translucent polycarbonate screen UV stabilized.
Internal reflector in painted steel sheet UV stabilized.

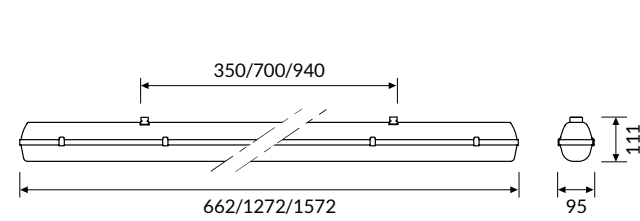

IP 66 A+
IK10

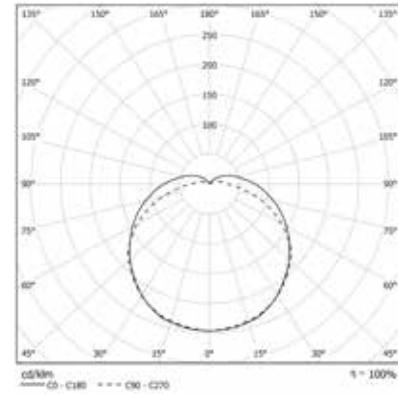

COLOUR TEMPERATURE


4000K

COD	Light Bulb Icon	Power (W)	Beam Angle	Length (mm)	Width (mm)
03PC10L466	10W 4000K IP66	10	1260	95x662	
03PC12L466	12W 4000K IP66	12	1510	95x662	
03PC15L466	15W 4000K IP66	15	1950	95x662	
03PC18L466	18W 4000K IP66	18	2320	95x1272	
03PC22L466	22W 4000K IP66	22	2860	95x1272	
03PC30L466	30W 4000K IP66	30	3920	95x1272	
03PC46L466	46W 4000K IP66	46	5650	95x1272	
03PC22L4L66	22W 4000K IP66	22	2810	95x1572	
03PC27L466	27W 4000K IP66	27	3530	95x1572	
03PC37L466	37W 4000K IP66	37	4940	95x1572	
03PC58L466	58W 4000K IP66	58	7090	95x1572	

Technical Note

INDOOR/OUTDOOR INSTALLATION

Not suitable for outdoor applications.
To be installed in indoor or covered outdoor areas.

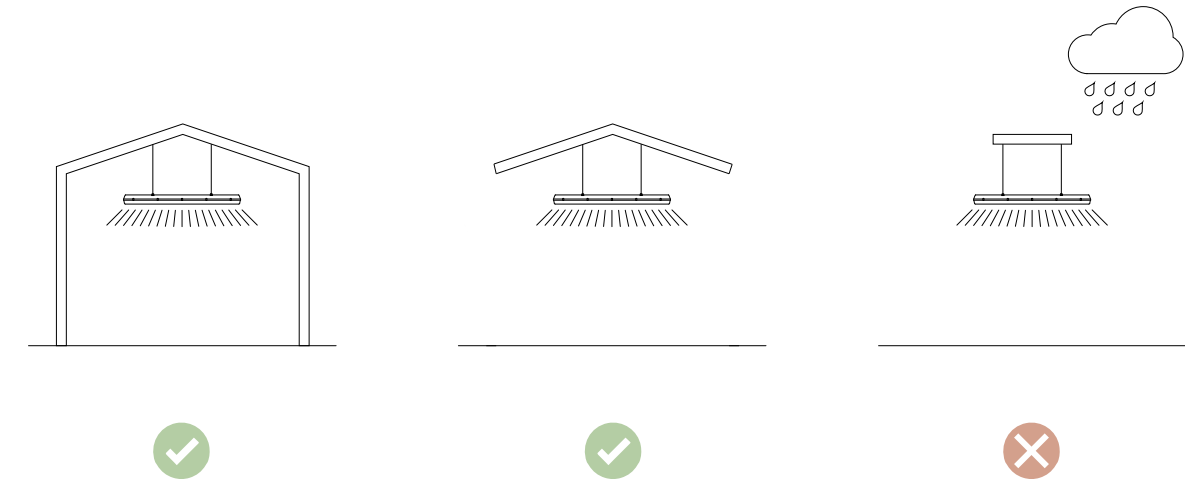

ACCESSORIES INCLUDED



Brackets for ceiling or wall application.



Hanging hook for suspended applications.