




/ 4 3 4

R E M

4 3 5 /

# R E M


Design ESSE-CI

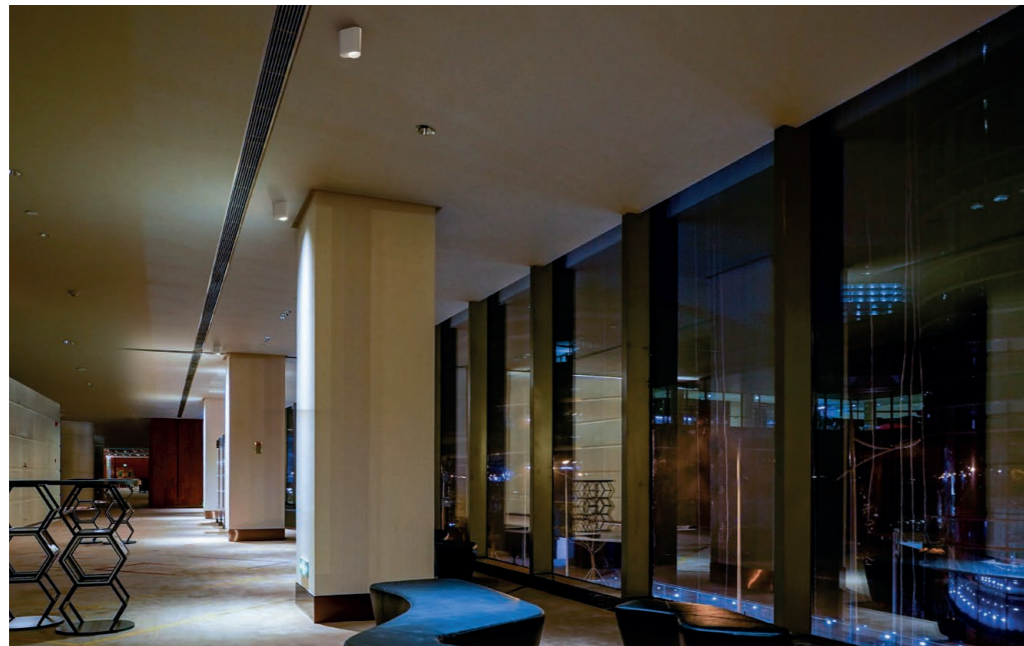

**η** > 108 lm/W

**CRI** >80

**IP** 20

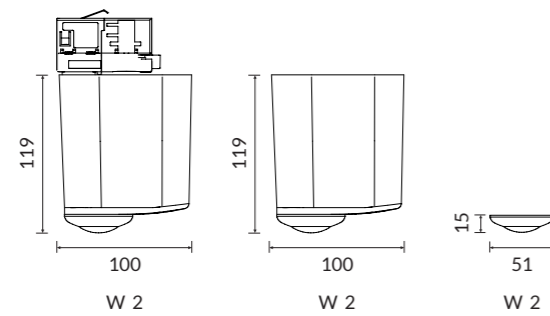



/ 4 3 6

**REM**

4 3 7 /



# REM

REM is a range of emergency fixtures with integrated driver and accumulator (1/3h) for recessed installation, ceiling fixture and three-phase track with limited dimensions. The luminaires are equipped with 3 different types of lens for anti-panic lighting, escape routes and presidia.

## SPECIFICATIONS

- Integrated driver and accumulator
- Colour temperature: 6500K
- CRI>80
- McAdams 3
- Life Time: L80/B50 50.000h
- 5 years complete warranty
- Eye safety: risk-free (RG 0) in accordance with EN62471:2009

## OPTICS

- Spot
- Escape routes
- Anti-panic

## BODY

Polycarbonate body.

## LEGAL REFERENCES

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

## CERTIFICATIONS

**CE** IP40  
Classe ErP: A<sup>+</sup>

## COLOUR

White RAL 9003 - Codice: B  
Black RAL 9005 - Code: C8

## ON REQUEST

- Wiring DALI dimmable - Code: RDD
- S/A version
- Self-test

## VERSIONS


EMERGENCY TRACK  
EMERGENCY CEILING  
EMERGENCY RECESSED



/ 4 3 8


# REM TRACK

With Eutrack adaptor.  
1h/3h autonomy. S/E mode.

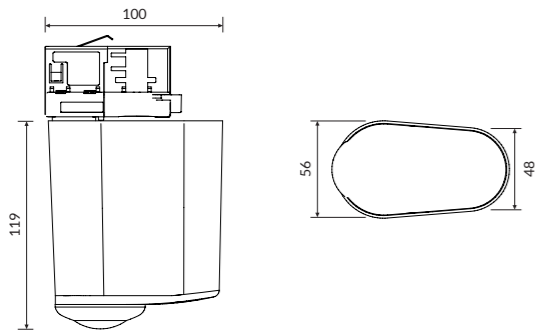

## COLOUR TEMPERATURE //


6 5 0 0 K

COD		lm
13EM2L65H1	2W 6500K	217
13EM2L65H3	2W 6500K	217




# REM CEILING

For ceiling mounting.  
1h/3h autonomy. S/E mode.

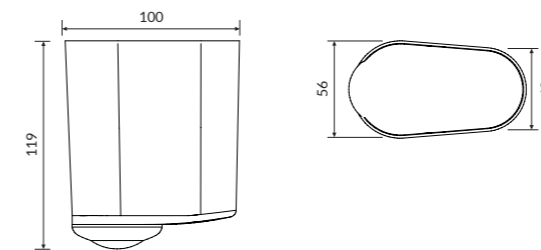

## COLOUR TEMPERATURE //

6 5 0 0 K

COD		lm
13EM2L65H1C	2W 6500K	217
13EM2L65H3C	2W 6500K	217



IP 40 



REM

4 3 9 /

IP 40 



/ 4 4 0

REM

4 4 1 /

# REM RECESSED




## TECHNICAL NOTE


### EMISSIONS

For recessed installation.  
1h/3h autonomy. S/E mode.


IP 40 **A+**







Spot

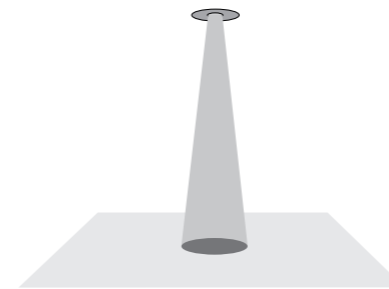

Escape routes

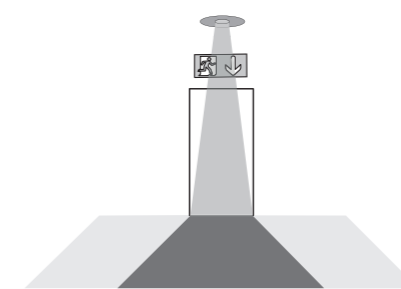

Anti-panic

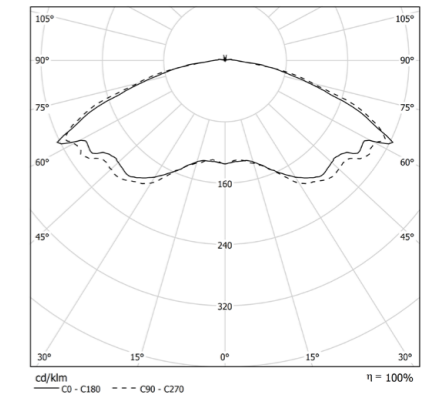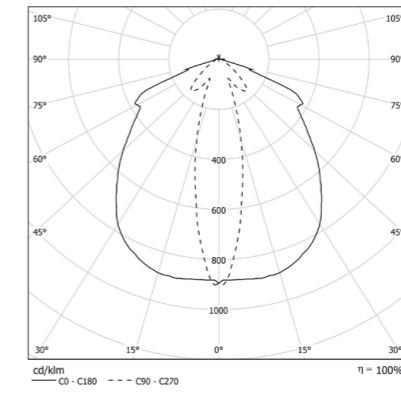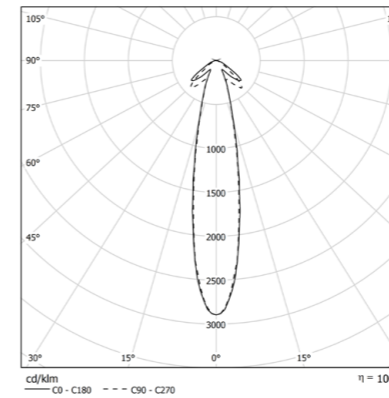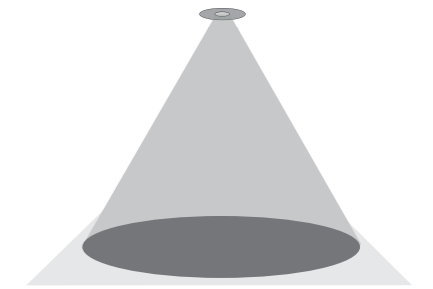

### COLOUR TEMPERATURE //

6 5 0 0 K

COD		lm
13EM2L65H1R	2W 6500K	217
13EM2L65H3R	2W 6500K	217