



RGL MAXI

ID 04

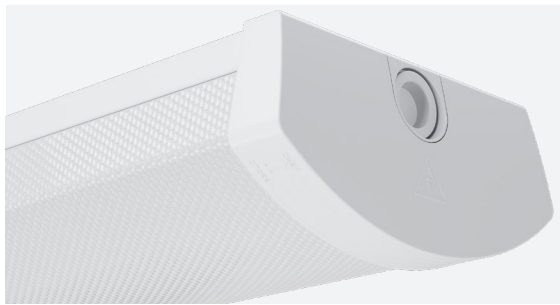


Both end caps feature an **Open-Close structure** and can be opened manually to facilitate end-cap installation, wiring and CCT adjustment.

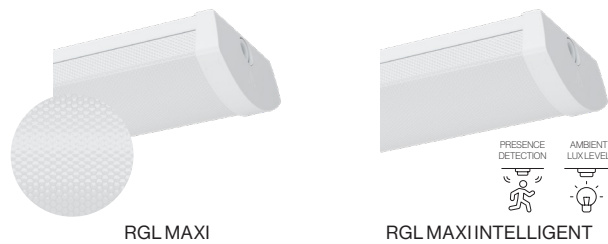

CE	RETI LAP	IP 44	CRI>90	Mac Adams 3	Body
5 YEARS WARRANTY		IK 07	RG0/PG1	L90/B10 50.000h	Epoxy powder coated sheet metal and aluminium end caps

RGL / MAXI

Microprismatic polycarbonate diffuser, uniform low-glare emission, UGR<19. Beam angle 90°




3000K >135lm/W 4000K >140lm/W

CCT.3000-4000K	lm	Led	Lmm
04MP20CS	2724-2808	12-15-18-20W	610
04MP40CS	5432-5600	24-28-34-40W	1210
04MP50CS	6800-7010	31-38-45-50W	1510

RGL / MAXI INTELLIGENT

Microprismatic polycarbonate diffuser, uniform low-glare emission, UGR<19. 90° beam angle. Integrated presence sensor.

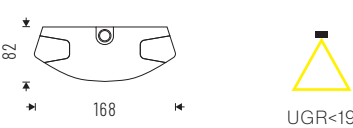

PRESENCE DETECTION AMBIENT LUX LEVEL 3000K >135lm/W 4000K >140lm/W

CCT.3000-4000K	lm	Led	Lmm
04MP20CSI	2724-2808	12-15-18-20W	610
04MP40CSI	5432-5600	24-28-34-40W	1210
04MP50CSI	6800-7010	31-38-45-50W	1510

ACCESSORIES



3000 mm suspension kit.

04AA1330MX

CE	RETI LAP	IP 44	CRI>90	Mac Adams 3	On req.:	BT	1h EM	1h DEM	3h EM	Body	Colour
5 YEARS WARRANTY		IK 07	RG0/PG1	L90/B10 50.000h	CODE - D		EM	DEM	EM3H	Epoxy powder coated sheet metal and aluminium end caps	COD.B