


SKYLITE

ID 29

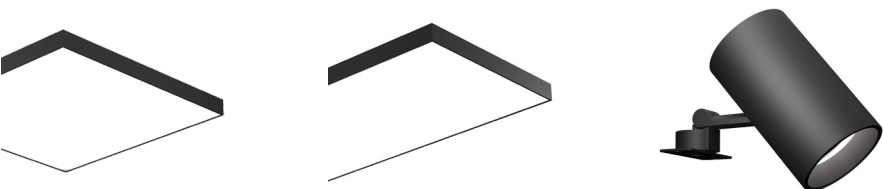

SKYLITE

SKYLITE LONG

SKYLITE SPOT



CE

RETI LAP

5 YEARS WARRANTY

IP 40

CRI > 90

Mac Adams 3

-20°
+35°

RG0/RG1


L90/B10
50.000h

PVC FIRE
proof B1 level

Body
Extruded aluminium frame

SKYLITE


High-uniformity PVC diffuser.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
29PVC58K4	5740	29PVC58K3	5281	58W	800x800
29PVC117K4	11579	29PVC117K3	10651	117W	1200x1200
29PVC194K4	19200	29PVC194K3	17663	194W	1600x1600

SKYLITE / LONG

High-uniformity PVC diffuser.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
29PVC146K4L	14448	29PVC146K3L	13290	146W	800x2400
29PVC233K4L	23052	29PVC233K3L	21193	233W	1200x2400
29PVC292K4L	28885	29PVC292K3L	26571	292W	1600x2400

CE

RETI LAP

5 YEARS WARRANTY

IP 40

CRI > 90

Mac Adams 3

-20°
+35°

RG0/RG1

L90/B10
50.000h

PVC FIRE
proof B1 level


On req.:
CODE - D
BT
1h EM
1h DEM
3h EM3H
CODE K27
2700K

Body
Extruded aluminium frame

Colours
COD.W
COD.BK
ONREQ.

SKYLITE / SPOT

Spot applicable to Skylite. Internal aluminium reflectors.
Beam angles: 15° - 24° - 36° - 50°.

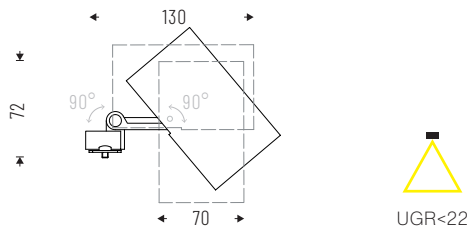

CCT. 4000K	lm	CCT. 3000K	lm	Led	Ømm
29PC14K415	2492	29PC14K315	2329	14W 15°	70
29PC14K424	2492	29PC14K324	2329	14W 24°	70
29PC14K436	2492	29PC14K336	2329	14W 36°	70
29PC14K450	2492	29PC14K350	2329	14W 50°	70

ACCESSORIES



Ceiling mounting kit.

29AA14
29AA14L - LONG



Suspension kit with millimetric adjustment, 3000 mm.

29AA1330
29AA1330L



3–5 pole powered supply box with 3000 mm cable length.

00AA16 104X39XH26MM
00AA165P 104X54XH26MM
00AA167P 104X54XH26MM



150 mm alignment spacer kit.

29AA11DS

CE

CCC

RETILAP

5 YEARS WARRANTY

IP 40

CRI>90

Mac Adams 3

-20°
+35°

RG0/RG1

L90/B10
50.000h

On req.:
 CODE - D

BT

1 h
EM

1 h
DEM

3 h
EM

CODE K27
2700K

Body

Extruded aluminium frame

Colours

COD.W

COD.BK

ON REQ.

PVC FIRE
proof B1 level