

STILLA

Design ESSE-CI




η >107 lm/W; >119 lm/W

CRI >80

IP 65

UGR <22

IK 08

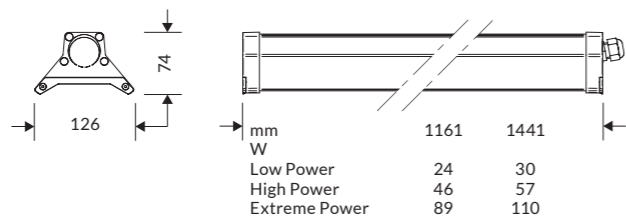



STILLA

STILLA is a highly technical IP rated fixture that features performance optics, making it extremely useful for large open plan areas such as warehousing, transport depots and manufacturing plants, as well as in retail applications that require high brightness artificial lighting with good colour quality. A selection of optics and lumen outputs are offered. This, coupled with the innovative installation accessories including those for continuous row mounting, make STILLA extremely competitive when compared to traditional systems. The body is manufactured from extruded aluminium for optimum thermal management and sealed against moisture and dust ingress to IP65. Dimmable and emergency options are also offered making the collection perfect for use with lighting control systems, where optimum efficiency and energy savings are desired. Supplied with 2000mm power cable or quick connector.

SPECIFICATIONS

- Integrated driver
- Colour temperature: 3000K/4000K
- CRI>80
- McAdams 3
- Life Time: L80/B50 >50.000h
- 5 years complete warranty
- Eye safety: risk-free (RG 0) in accordance with EN62471:2009
- Temperature range: -25° / +45°

OPTICS

NB Narrow beam: concentrating polycarbonate lenses coextruded into the main diffuser.
 WB Wide beam: diffusing polycarbonate lenses coextruded into the main diffuser.
 WO Wide beam opal lens: diffusing polycarbonate lenses coextruded into the main diffuser.
 WA Wide beam acrylic lens: diffusing polycarbonate lenses coextruded into the main diffuser.
 Optional: transparent protection glass.

BODY

Anodized aluminum body and die-cast end caps.

LEGAL REFERENCES

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

CERTIFICATIONS

CE IP65

ErP Class: A⁺⁺ - A⁺

IK08

COLOURS

Natural anodized

ON REQUEST

- Wiring DALI dimmable - Code: RDD (verify the version available)
- Wiring with emergency kit - Code: EM for 1 hour / EM3H for 3 hours (verify the version available)
- Colour Temperature 5000K
- CRI>90 Premium Version
- Driver Bluetooth - Code: BT (verify the version available)

VERSIONS

STILLA NB
 STILLA WB
 STILLA WO

STILLA WA
 ACCESSORIES




/ 4 6 6

STILLA NB LOW POWER

OPTIC

Narrow beam optic co-extruded into the main diffuser.

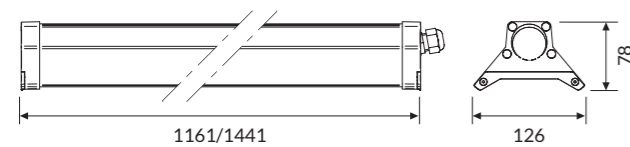


* Fixture for single installation equipped with cable L 2mt.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05NB24L465	24W 4000K	2416	1161
05NB30L465	30W 4000K	3021	1441

IP 65 A++
IK 08

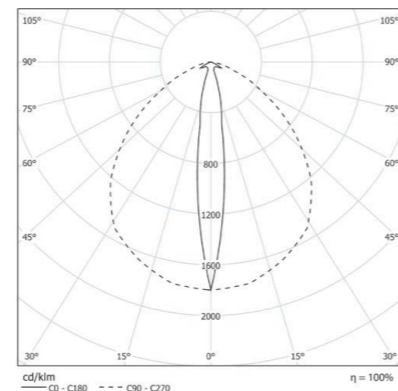


3 0 0 0 K

COD	💡	lm	mm
05NB24L365	24W 3000K	2365	1161
05NB30L365	30W 3000K	2956	1441

STILLA NB-FC LOW POWER

OPTIC

Narrow beam optic co-extruded into the main diffuser.

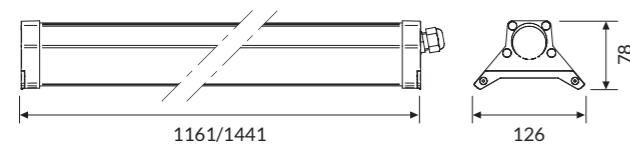


* Fixture for continuous-row with quick connector and through wiring.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05NB24L465FC	24W 4000K	2416	1161
05NB30L465FC	30W 4000K	3021	1441

IP 65 A++
IK 08

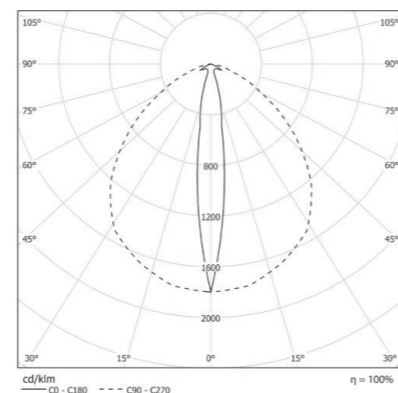

3 0 0 0 K

COD	💡	lm	mm
05NB24L365FC	24W 3000K	2365	1161
05NB30L365FC	30W 3000K	2956	1441




4 6 7 /

STILLA WB LOW POWER

OPTIC

Wide beam optic co-extruded into the main diffuser.

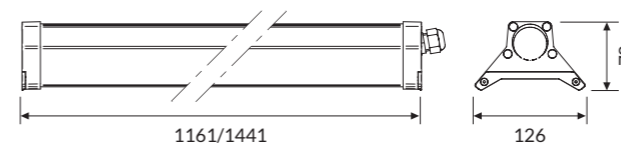


* Fixture for single installation equipped with cable L 2mt.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05WB24L465	24W 4000K	2578	1161
05WB30L465	30W 4000K	3222	1441

IP 65 A++
IK 08

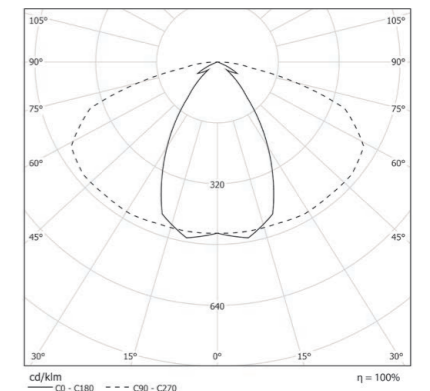


3 0 0 0 K

COD	💡	lm	mm
05WB24L365	24W 3000K	2526	1161
05WB30L365	30W 3000K	3158	1441

STILLA WB-FC LOW POWER

OPTIC

Wide beam optic co-extruded into the main diffuser.

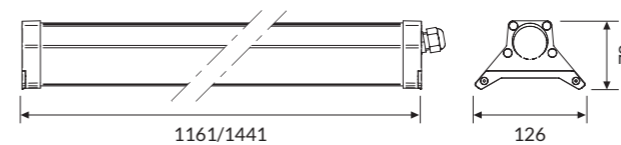


* Fixture for continuous-row with quick connector and through wiring.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05WB24L465FC	24W 4000K	2578	1161
05WB30L465FC	30W 4000K	3222	1441

IP 65 A++
IK 08

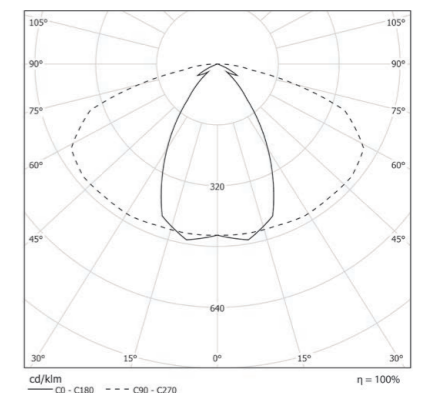

3 0 0 0 K

COD	💡	lm	mm
05WB24L365FC	24W 3000K	2526	1161
05WB30L365FC	30W 3000K	3158	1441




/ 4 6 8

STILLA WO LOW POWER


OPTIC

Wide beam optic. Frosted polycarbonate lens.

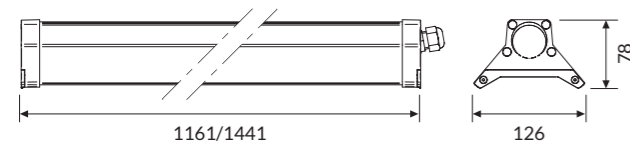

* Fixture for single installation equipped with cable L 2mt.

IP 65
IK 08

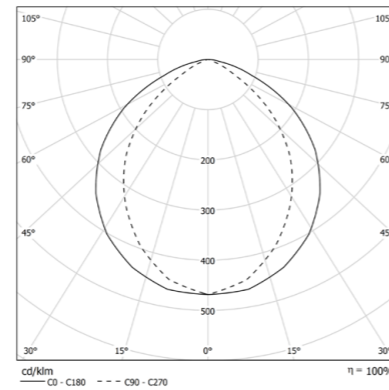

COLOUR TEMPERATURE //

4 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WO24L465	24W 4000K	2304	1161
05WO30L465	30W 4000K	2880	1441

3 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WO24L365	24W 3000K	2304	1161
05WO30L365	30W 3000K	2880	1441




4 6 9 /

STILLA LOW POWER


OPTIC

Wide beam optic. Acrylic lens.

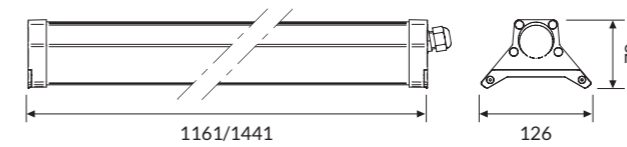

* Fixture for single installation equipped with cable L 2mt.

IP 65
IK 08

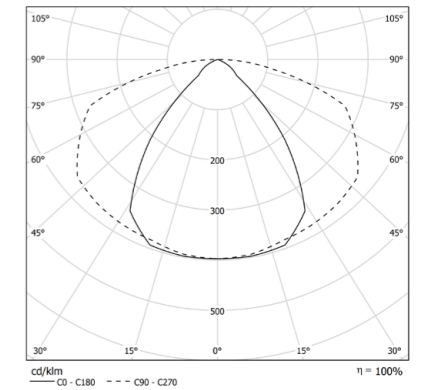

COLOUR TEMPERATURE //

4 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WA24L465	24W 4000K	2760	1161
05WA30L465	30W 4000K	3450	1441


3 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WA24L365	24W 3000K	2512	1161
05WA30L365	30W 3000K	3140	1441

STILLA WO-FC LOW POWER


OPTIC

Wide beam optic. Frosted polycarbonate lens.

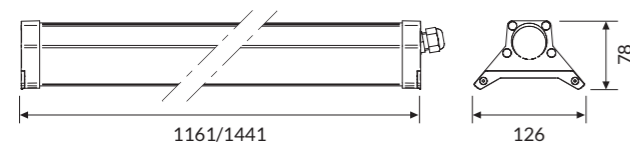

* Fixture for continuous-row with quick connector and through wiring.

IP 65
IK 08

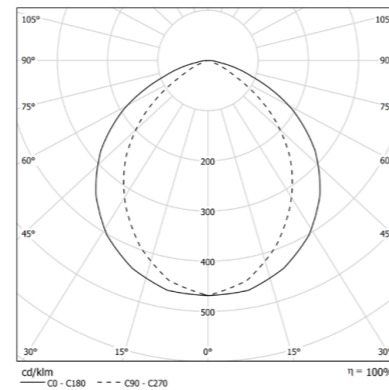

COLOUR TEMPERATURE //

4 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WO24L465FC	24W 4000K	2304	1161
05WO30L465FC	30W 4000K	2880	1441


3 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WO24L365FC	24W 3000K	2304	1161
05WO30L365FC	30W 3000K	2880	1441

STILLA WA-FC LOW POWER


OPTIC

Wide beam optic. Acrylic lens.

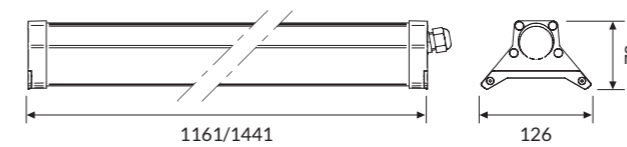

* Fixture for continuous-row with quick connector and through wiring.

IP 65
IK 08

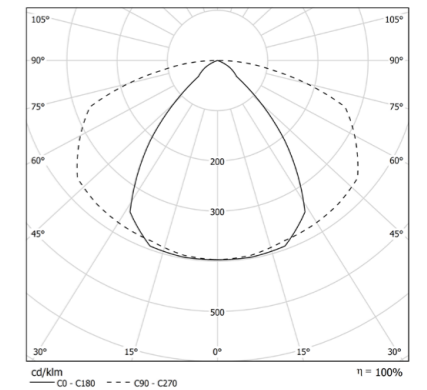

COLOUR TEMPERATURE //

4 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WA24L465FC	24W 4000K	2760	1161
05WA30L465FC	30W 4000K	3450	1441

3 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WA24L365FC	24W 3000K	2512	1161
05WA30L365FC	30W 3000K	3140	1441




/ 4 7 0

STILLA NB HIGH POWER

OPTIC

Narrow beam optic co-extruded into the main diffuser.

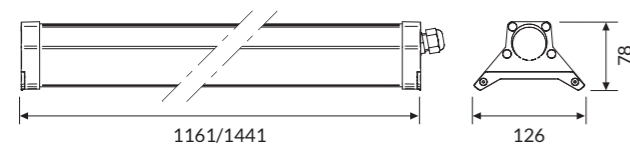


* Fixture for single installation equipped with cable L 2mt.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05NB46L465	46W 4000K	4632	1161
05NB57L465	57W 4000K	5739	1441

IP 65
IK 08 A++

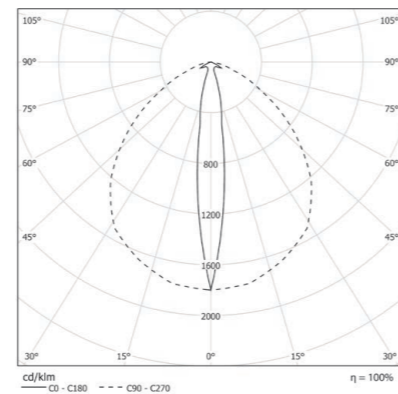


3 0 0 0 K

COD	💡	lm	mm
05NB46L365	46W 3000K	4534	1161
05NB57L365	57W 3000K	5618	1441

STILLA NB-FC HIGH POWER

OPTIC

Narrow beam optic co-extruded into the main diffuser.

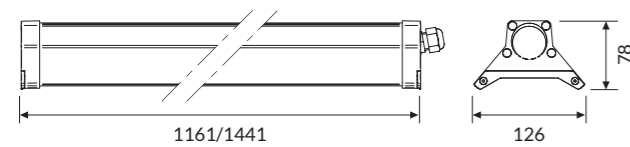


* Fixture for continuous-row with quick connector and through wiring.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05NB46L465FC	46W 4000K	4632	1161
05NB57L465FC	57W 4000K	5739	1441

IP 65
IK 08 A++

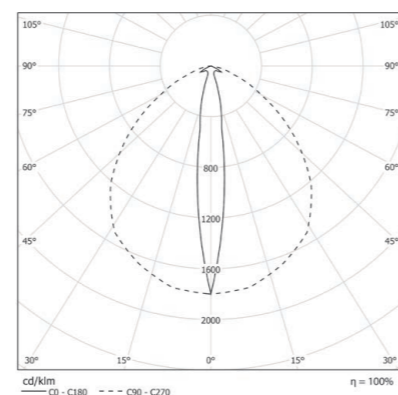

3 0 0 0 K

COD	💡	lm	mm
05NB46L365FC	46W 3000K	4534	1161
05NB57L365FC	57W 3000K	5618	1441




4 7 1 /

STILLA WB HIGH POWER

OPTIC

Wide beam optic co-extruded into the main diffuser.

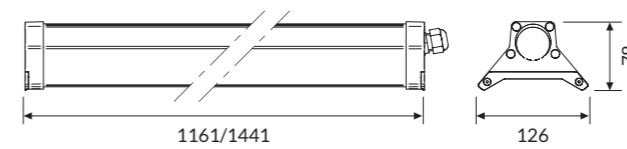


* Fixture for single installation equipped with cable L 2mt.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05WB46L465	46W 4000K	4939	1161
05WB57L465	57W 4000K	6121	1441

IP 65
IK 08 A++

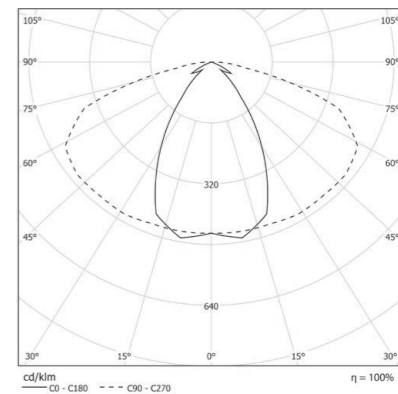


3 0 0 0 K

COD	💡	lm	mm
05WB46L365	46W 3000K	4842	1161
05WB57L365	57W 3000K	5999	1441

STILLA WB-FC HIGH POWER

OPTIC

Wide beam optic co-extruded into the main diffuser.

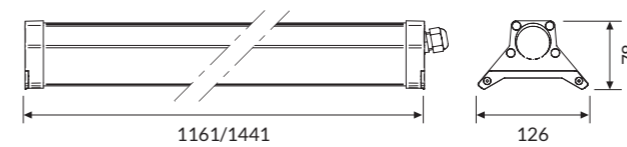


* Fixture for continuous-row with quick connector and through wiring.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05WB46L465FC	46W 4000K	4939	1161
05WB57L465FC	57W 4000K	6121	1441

IP 65
IK 08 A++

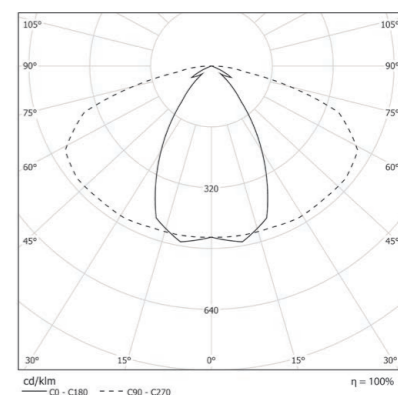

3 0 0 0 K

COD	💡	lm	mm
05WB46L365FC	46W 3000K	4842	1161
05WB57L365FC	57W 3000K	5999	1441




/ 4 7 2

STILLA WO HIGH POWER


OPTIC

Wide beam optic. Frosted polycarbonate lens.

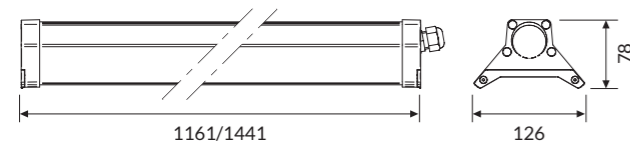

* Fixture for single installation equipped with cable L 2mt.

IP 65
IK 08

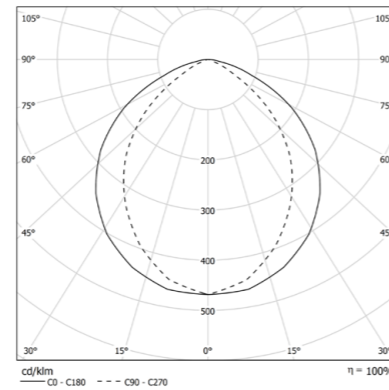

COLOUR TEMPERATURE //

4 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WO46L465	46W 4000K	4416	1161
05WO57L465	57W 4000K	5472	1441

3 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WO46L365	46W 3000K	4278	1161
05WO57L365	57W 3000K	5301	1441




4 7 3 /

STILLA 4 7 3 /




OPTIC

Wide beam optic. Acrylic lens.

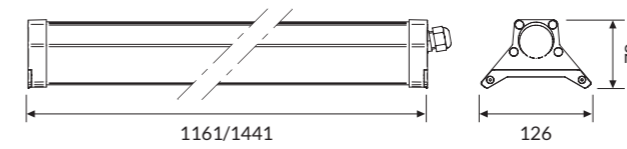

* Fixture for single installation equipped with cable L 2mt.

IP 65
IK 08

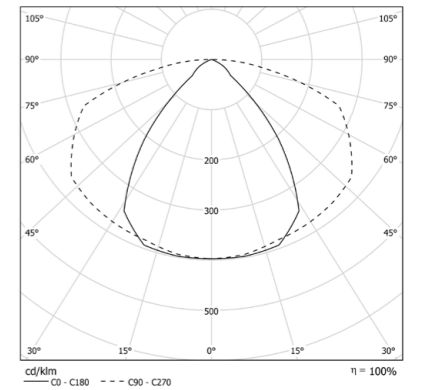

COLOUR TEMPERATURE //

4 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WA46L465	46W 4000K	5762	1161
05WA57L465	57W 4000K	7125	1441


3 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WA46L365	46W 3000K	5243	1161
05WA57L365	57W 3000K	6484	1441

STILLA WO-FC HIGH POWER


OPTIC

Wide beam optic. Frosted polycarbonate lens.

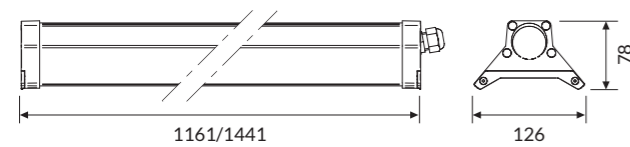

* Fixture for continuous-row with quick connector and through wiring.

IP 65
IK 08

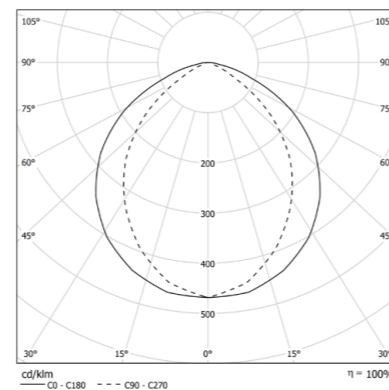

COLOUR TEMPERATURE //

4 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WO46L465FC	46W 4000K	4416	1161
05WO57L465FC	57W 4000K	5472	1441


3 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WO46L365FC	46W 3000K	4278	1161
05WO57L365FC	57W 3000K	5301	1441

STILLA WA-FC HIGH POWER


OPTIC

Wide beam optic. Acrylic lens.

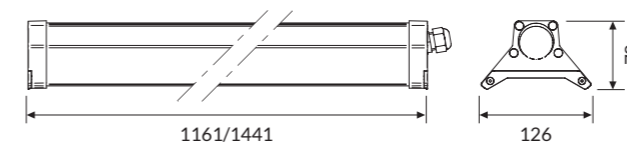

* Fixture for continuous-row with quick connector and through wiring.

IP 65
IK 08

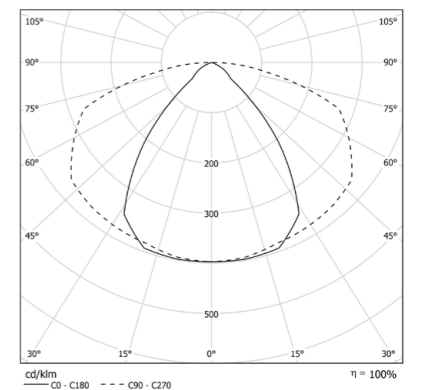

COLOUR TEMPERATURE //

4 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WA46L465FC	46W 4000K	5762	1161
05WA57L465FC	57W 4000K	7125	1441

3 0 0 0 K

COD	Light Bulb Icon	lm	mm
05WA46L365FC	46W 3000K	5243	1161
05WA57L365FC	57W 3000K	6484	1441




/ 4 7 4

STILLA NB EXTREME POWER

OPTIC

Narrow beam optic co-extruded into the main diffuser.

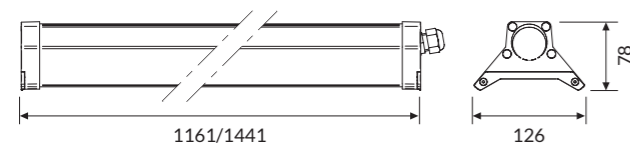


* Fixture for single installation equipped with cable L 2mt.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05NB89L465	89W 4000K	10013	1161
05NB110L465	110W 4000K	11805	1441

IP 65 A++
IK 08

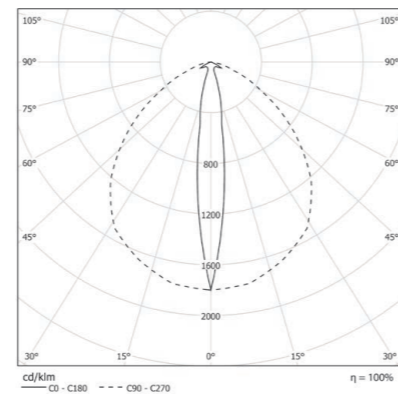

3 0 0 0 K

COD	💡	lm	mm
05NB89L365	89W 3000K	9800	1161
05NB110L365	110W 3000K	11553	1441




4 7 5 /

STILLA WB EXTREME POWER

OPTIC

Wide beam optic co-extruded into the main diffuser.

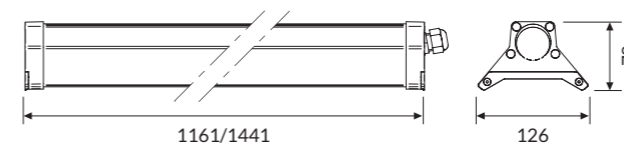


* Fixture for single installation equipped with cable L 2mt.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05WB89L465	89W 4000K	10678	1161
05WB110L465	110W 4000K	12590	1441

IP 65 A++
IK 08

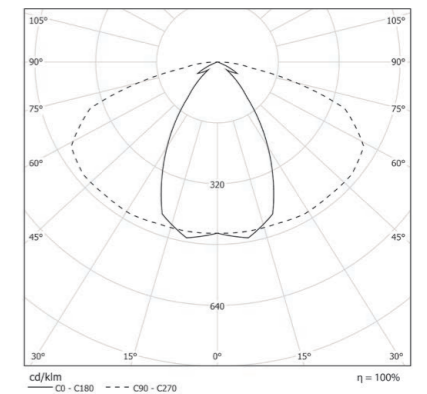


3 0 0 0 K

COD	💡	lm	mm
05WB89L365	89W 3000K	10465	1161
05WB110L365	110W 3000K	12338	1441

STILLA NB-FC EXTREME POWER

OPTIC

Narrow beam optic co-extruded into the main diffuser.

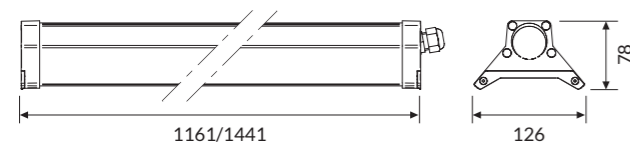


* Fixture for continuous-row with quick connector and through wiring.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05NB89L465FC	89W 4000K	10013	1161
05NB110L465FC	110W 4000K	11805	1441

IP 65 A++
IK 08

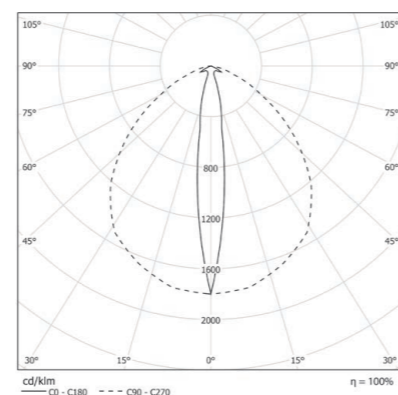


3 0 0 0 K

COD	💡	lm	mm
05NB89L365FC	89W 3000K	9800	1161
05NB110L365FC	110W 3000K	11553	1441

STILLA WB-FC EXTREME POWER

OPTIC

Wide beam optic co-extruded into the main diffuser.

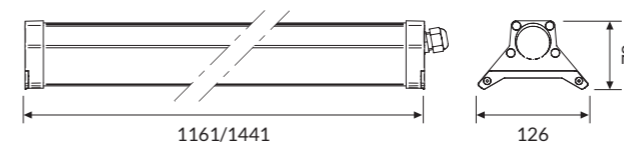


* Fixture for continuous-row with quick connector and through wiring.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05WB89L465FC	89W 4000K	10678	1161
05WB110L465FC	110W 4000K	12590	1441

IP 65 A++
IK 08

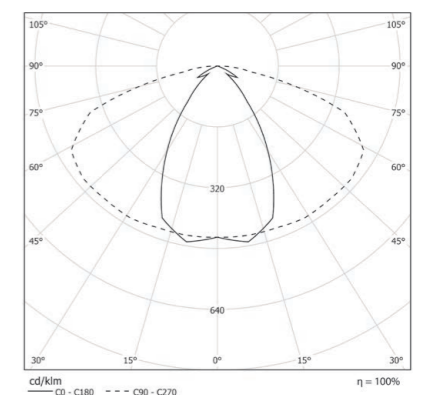

3 0 0 0 K

COD	💡	lm	mm
05WB89L365FC	89W 3000K	10465	1161
05WB110L365FC	110W 3000K	12338	1441




/ 4 7 6

STILLA WO EXTREME POWER

OPTIC

Wide beam optic. Frosted polycarbonate lens.

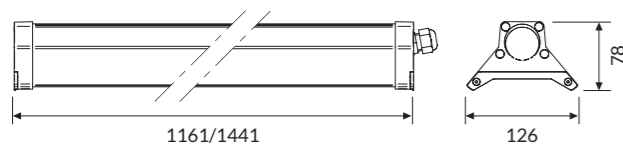


* Fixture for single installation equipped with cable L 2mt.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05WO89L465	89W 4000K	9078	1161
05WO110L465	110W 4000K	11220	1441

IP 65
IK 08

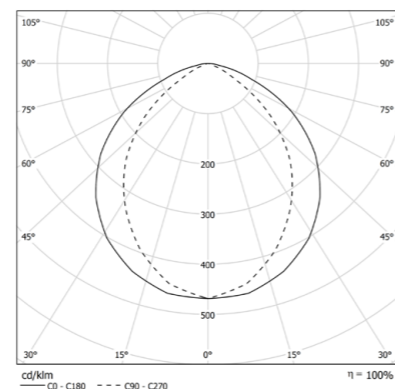

3 0 0 0 K

COD	💡	lm	mm
05WO89L365	89W 3000K	8722	1161
05WO110L365	110W 3000K	10780	1441



4 7 7 /


STILLA 4 7 7 /



STILLA WA EXTREME POWER

OPTIC

Wide beam optic. Acrylic lens.

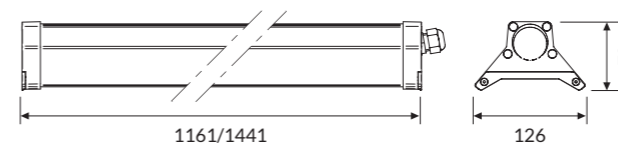


* Fixture for single installation equipped with cable L 2mt.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05WA89L465	89W 4000K	9345	1161
05WA110L465	110W 4000K	11550	1441

IP 65
IK 08

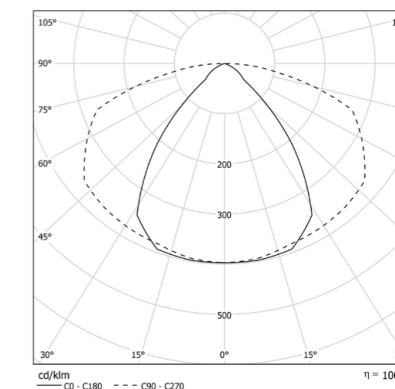


3 0 0 0 K

COD	💡	lm	mm
05WA89L365	89W 3000K	8504	1161
05WA110L365	110W 3000K	10511	1441

STILLA WO-FC EXTREME POWER

OPTIC

Wide beam optic. Frosted polycarbonate lens.

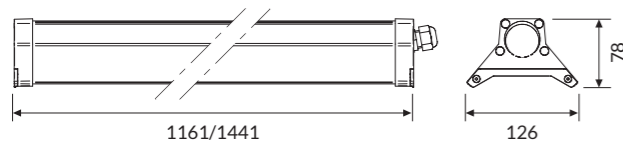


* Fixture for continuous-row with quick connector and through wiring.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05WO89L465FC	89W 4000K	9078	1161
05WO110L465FC	110W 4000K	11220	1441

IP 65
IK 08

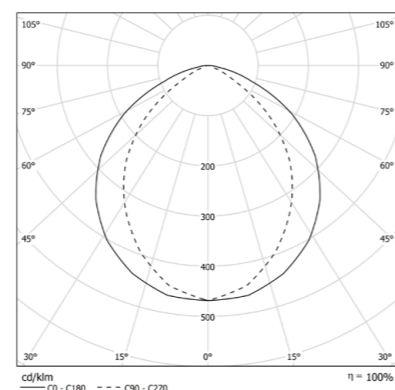

3 0 0 0 K

COD	💡	lm	mm
05WO89L365FC	89W 3000K	8722	1161
05WO110L365FC	110W 3000K	10780	1441

STILLA WA-FC EXTREME POWER

OPTIC

Wide beam optic. Acrylic lens.




* Fixture for continuous-row with quick connector and through wiring.

COLOUR TEMPERATURE //

4 0 0 0 K

COD	💡	lm	mm
05WA89L465FC	89W 4000K	9345	1161
05WA110L465FC	110W 4000K	11550	1441

IP 65
IK 08

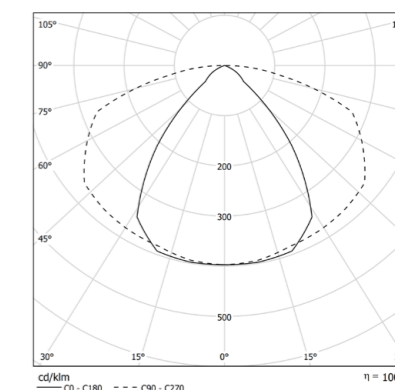

3 0 0 0 K

COD	💡	lm	mm
05WA89L365FC	89W 3000K	8504	1161
05WA110L365FC	110W 3000K	10511	1441

ACCESSORIES



05AA13

Single wire 1500mm adjustable suspension kit.



05AA1330

Single wire 3000mm adjustable suspension kit.



05AA14

Spacers kit for ceiling mounting.




05AA11

Bracket for continuous rows installation length 1500mm.



05AA15

Brackets kit for wall installation.



05AAVTS: 1161mm

05AAVTL: 1441mm

Transparent protective glass.

TECHNICAL NOTE

INSTALLATION EXAMPLE

Thanks to the 05AA11 accessory you can install the devices in suspended continuous line by avoiding the use of busbars or cable raceways. This bracket serves as the mechanical joining, allows the masking of the connection cable between 2 devices and reduces the suspension points. It is click fixed on the devices and can be cut at the construction site.

