



SEMPLICE LED HCL



2700K-6500K tunable white version with constant flux
for HCL ESSE-CI technologies.
DALI DT8 Driver.

OPTIC

PMMA technopolymer (UGR<22) with surface treatment
for completely uniform light distribution. Integrated LED
technology.

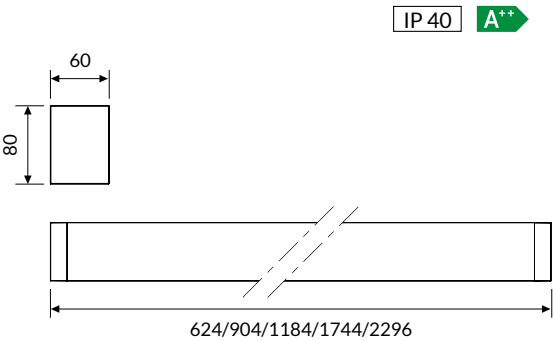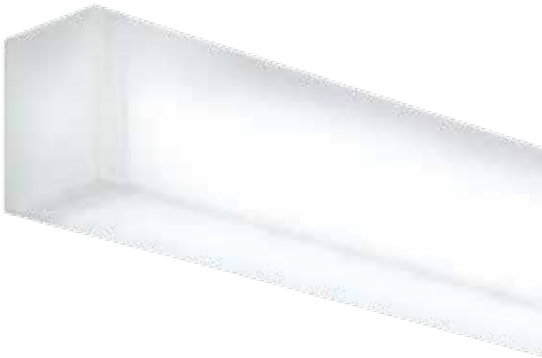

VERSIONS

COD		lm	mm
67PG24HCL	24W	1740	624
67PG36HCL	36W	2610	904
67PG48HCL	48W	3480	1184
67PG72HCL	72W	4350	1744
67PG96HCL	96W	6960	2296